

Power/Energy Monitors for Various Open Networks

- Single-phase 2-wire and 3-wire, three-phase 3-wire and 4-wire systems
- IP 52 front panel
- Various network communication and Ao/Do combinations selectable
- Up to 31st harmonic distortion measurement
- Software lock

L53U
DIN rail mounted



- Modbus + Di/Do
- Ao x 4 points

Modbus

53U
96-mm square panel size



- Modbus + Di/Do
- Ao x 2 points + Di/Do
- Ao x 4 points

Modbus

54U / 54UC / 54UL
110-mm square panel size




- Ao x 4 points
- Di/Do

Modbus CC-Link LONWORKS

Monitoring and Storing Measured/Computed Values on the PC

The PC Recorder Light MSR128LU dedicated for energy monitors is free for downloading from our web site.

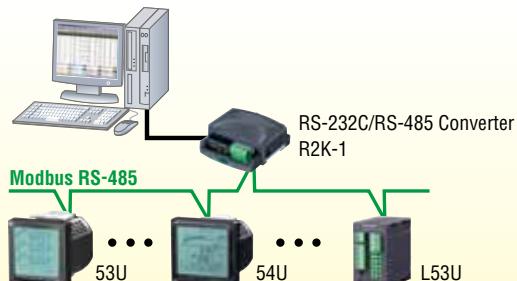

NEW

LSMT4

- 10 analog outputs
- 2 Wh pulse outputs



NEW

R7MWTU, R7EWTU, R7CWTU, R7LWTU

- Clamp-on current sensor use: easy installation
- 2 systems input



Modbus Ethernet CC-Link LONWORKS

NEW

R9MWTU, R9EWTU, R9CWTU, R9LWTU

- Clamp-on current sensor use: easy installation
- Up to 8 systems input
- Time stamped data logging in SD card



Modbus Ethernet CC-Link LONWORKS

For more information visit:

<http://www.m-system.com/>

Contact us:

info@m-system.co.jp

M-SYSTEM