

I/O SOLUTION PRODUCTS

1	Four-wire Signal Conditioners
2	Two-wire Signal Conditioners
3	Power Monitoring Components
4	Indicators & Tower Lights
5	Remote I/O
6	Paperless Recording System
7	Process & Temperature Controllers
8	IoT Components
9	Final Control Components
10	Lightning Surge Protectors



CATEGORY INDEX

PC / DCS / PLC



Sensors / Transmitters

Mobile terminals (smartphones, tablets) or mobile network operator services are not our products.

SCADA Software
 Limited to Japanese Market




Tower Lights
 Page 18



• Isolation Amplifiers



Power Monitoring Components
 Page 14-15

CC-Link Modbus
 Modbus/TCP LONWORKS



Remote I/O
 Page 19-26



CC-Link CC-Link IE field CC-Link I TSN
 DeviceNet EtherNet/IP EtherCAT
 Modbus Modbus/TCP
 LONWORKS MECHATROLINK HLS
 FL-net TLink
 OPC UA

• Wireless I/O System
 For Limited Markets



Process & Temperature Controllers
 Page 31



Final Control Components
 Page 36-39

CC-Link
 DeviceNet
 Modbus





FOUR-WIRE SIGNAL CONDITIONERS

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

A signal conditioner is used to condition and convert a field sensor signal suitable for processing with the PLC/DCS in a wide variety of process plants and factories. Typical applications are:

- ✓ **Signal conversion**
- ✓ **Signal isolation to stop ground loops**
- ✓ **Signal boosting to increase load drive capability**

Our signal conditioners are available with wide combinations of process signal I/O, power input and mounting configuration. Additionally, we offer the broadest line of signal splitters available.

Choose by Housing and Terminal Access Styles

- Plug-in base socket mounted
- Terminal block style
- Euro terminal block style
- Ultra-slim housing
- Installation base mounted
- Rack mounted
- Field enclosure mounted
- Sensor head mounted
- PCB mounted
- Connector output

Choose by I/O Signal Types

- Universal input
- DC mV, V, mA
- Two-wire transmitter
- Temperature
- Potentiometer
- Strain gauge
- CT & VT
- Frequency and pulse
- Pneumatic
- AC power
- And others

Choose by Functions

- Isolation / Amplification
- Conversion / Transmission
- Signal splitting
- Limit alarm
- Filtering
- Math / Process function
- Linearization

Choose by Power Supply

- AC line powered (4-wire)
- DC line powered (4-wire)
- Output loop powered (2-wire)
- Input loop powered (self powered)

Simulation experiments demonstrate effectiveness of isolators



How to choose DC signal isolators



ISOLATOR APPLICATIONS 1


Isolator is installed between a transmitter (i.e. sensor) and a receiver to galvanically isolate DC signals.

Breaking the path between a field instrument and a control room device minimizes various influences coming from the field site to the control room.

In addition, each instrument separated by galvanic isolation can choose its own ground point independently from other ones, avoiding the 'ground loop' problem.

Lastly, the isolator can provide impedance conversion to beat loop impedance constraints, and signal level conversion (e.g. from 10-50 mA to 4-20 mA) function.


4-wire isolator : 4-20 mA (passive) input / 4-20 mA output / Line powered

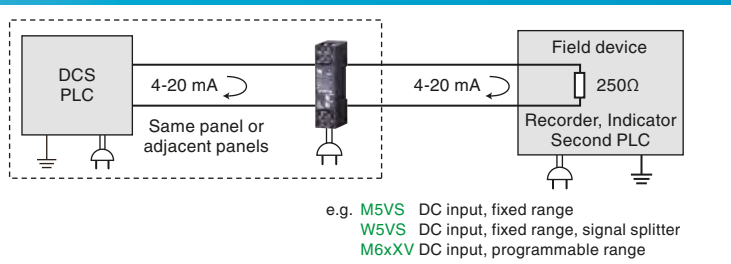

Designed primarily for front-ending PLC/DCS systems which are mounted within the same panel or adjacent to it. The isolator module is powered from terminals separate from signal lines.

- Test and measurement applications
- Manufacturing cells
- Monitoring systems located in-line with the manufacturing process

4-wire isolator / current loop supply : 4-20 mA (active) input / 4-20 mA output / Line powered

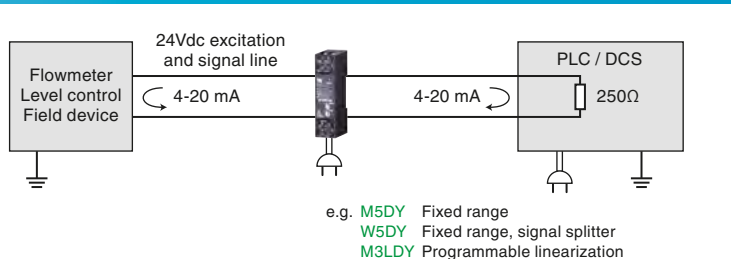

Basic isolator designed to interface a PLC and DCS system with a field instrument. The isolator module supplies 24 Vdc power to the field device and provides a linearized output signal if necessary.



- Remote field signal monitored by control system
- Water/wastewater treatment
- Petrochemical, tank farms, large manufacturing sites

Low-profile Signal Conditioners M5 / M5X / W5 Series

- Only 41 mm (1.61 in) deep, terminal block style modules can be installed anywhere, even behind the panel cover.
- M5X Series** PC programmable types have a convenient loop test output function.
- W5 Series** provides a second isolated output of independent range.



Compact, terminal block style housing

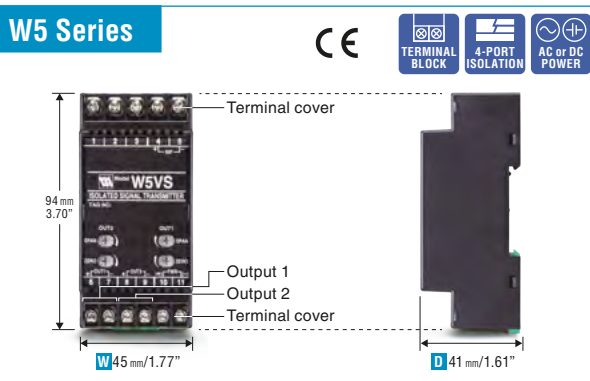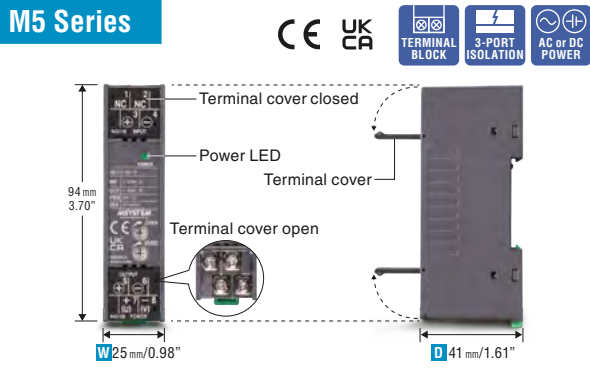


Four-wire Signal Conditioners

- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights
- Remote I/O
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors



Ultra-slim Signal Conditioners M6 / M60 Series

- M6 Series** is available with three connection styles: Tension-clamp (M6S), screw terminal (M6N) or euro terminal (M6D).
- M60 Series** is available with separable tension-clamp terminal block or mini-clamp (e-CON) connector.
- Low power consumption, high load drive capability

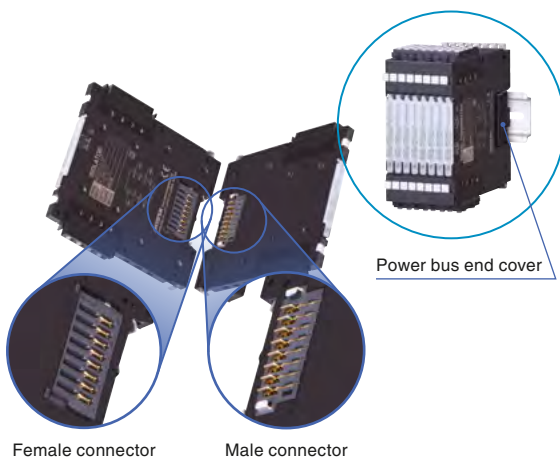

Female connector Male connector

Highly reliable power bus connection: hooks and grooves sliding into each other (M60 Series)

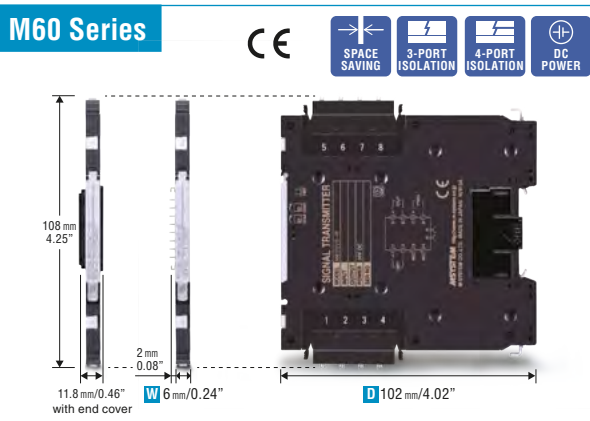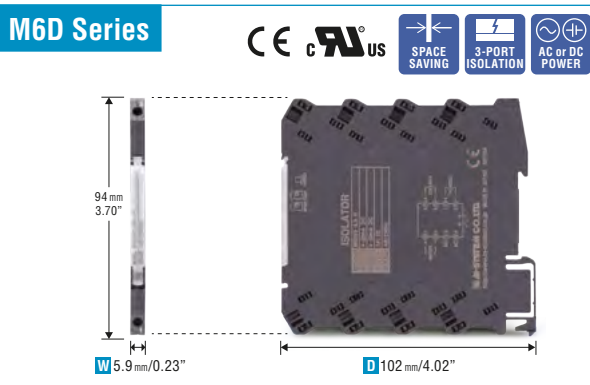

About Us & Locations

Compact Plug-in Signal Conditioners

M2 / M2E / W2 Series

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System


Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

- **M2/W2 Series** (Mini-M and Mini-MW) features a wide selection of input/output ranges and functions.
- **M2E Series** with bright, high-contrast OEL (Organic Electroluminescence) display for setup and process monitor
- **W2 Series** provides a second isolated output of independent range.
- PC programmable types have a convenient loop test output function.
- Base socket included with the modules

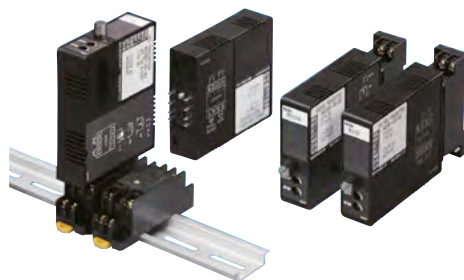


Plug-in socket mounted

M2E SERIES:
High-contrast OEL display makes loop checking easy for commissioning and maintenance


Multi display Single display Programming mode

Scrolling text


M2 Series

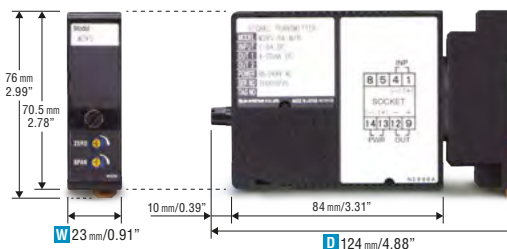


M2E Series

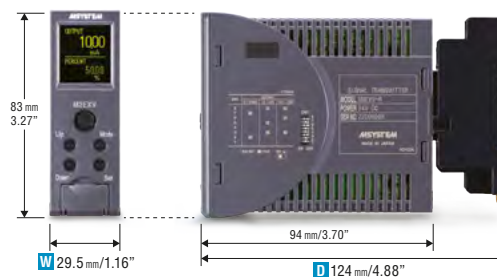

W2 Series

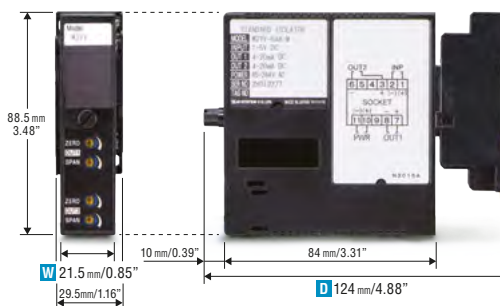

Why Isolate the Second Output?

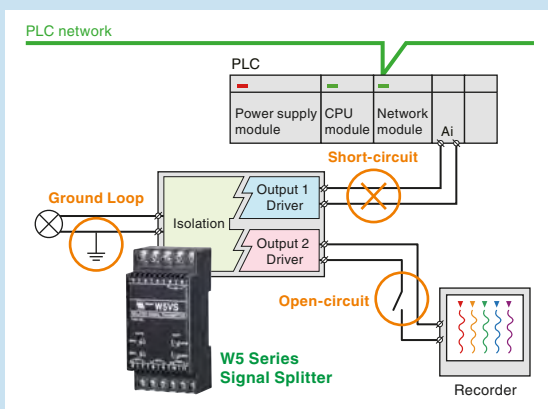

Channel-to-channel Isolation Enhances the Overall System Reliability

Whenever you want to add another device such as a recorder to a sensor signal loop connected to PLC's analog input module, a signal splitter that can output two isolated signals is recommended.

The loop's load capacity may allow to connect one more load in series to (4-20 mA current signal) or in parallel to (1-5 V voltage signal) an existing receiving instrument. However, in such a configuration, short-circuit, open-circuit or ground loop at one part of the loop could affect the entire system.

Galvanically separating each part of the loop is beneficial to contain any damage to the limited section in case of an accident, thus to making troubleshooting easier, minimizing the system downtime.

M3L Series

"One-Step Cal" Configuration without PC

- Enhanced PC configurator software is also available.
- Universal I/O specifications ideal for spare parts stock reduction programs



M8 Series

Direct Connection to PLC/DCS Plus Field Output

- Super-mini, plug-in modules
- 4-, 8- or 16-position installation base
- 4-20 mA output module available for control



M3S Series

12-mm Wide, Thin-profile Module

- Space-saving modules with separable terminal blocks
- Universal AC/DC power input available



20 Series Isolation Amplifiers

Customized Hybrid IC

- Greatly saves development lead time for analog isolation circuitry
- Standardized product lineup as a second source of major suppliers
- RoHS compliant
- Two-port or three-port isolation
- ± 5 V, ± 10 V input/output and other ranges
- Frequency characteristics options
- Withstand voltage up to 5000 Vac



STANDARDIZED MODEL EXAMPLES

	20VS5-201 Linearity $\pm 0.005\%$ TYP G=1 ($\pm 0.01\%$ MAX)	
	20VS5-202 Linearity $\pm 0.01\%$ TYP G=1 ($\pm 0.015\%$ MAX)	

	20VS8-202 SIP or DIP 3000 Vac isolation	
--	--	--

	20VS8-210 Frequency characteristics Approx. 20 kHz	
--	---	--

Simulation experiments demonstrate effectiveness of isolators




How to choose DC signal isolators



ISOLATOR APPLICATIONS 2


4-wire isolator / current loop supply : 4-20 mA (active) input / 4-20 mA output (source) / Line powered

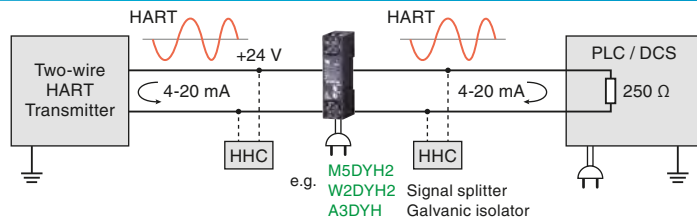

Designed to interface a PLC and DCS system with a field HART transmitter. The isolator module supplies 24 Vdc power to the field device.

It also allows the HART signal to pass when a technician needs to access the transmitter's process and diagnostic information via the HART signal using a HART hand-held communicator (HHC), from any termination point of the loop at both sides of the isolator.

When the receiver powers the isolator's output loop (sink)

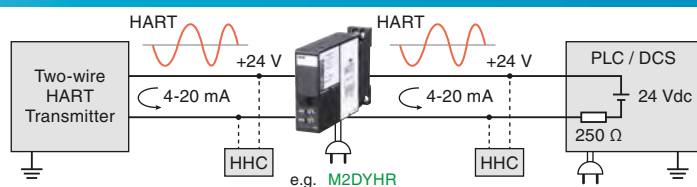

- Remote field signal monitored by control system
- Water/wastewater treatment
- Petrochemical, tank farms, large manufacturing sites

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

About Us & Locations

Function Modules & Retrofit Products


Unique Functions for Stable Process Operations

- Math functions
- Process functions
- Filters
- Unique functions to ensure stable process operations and to solve problems in system upgrading




- Temp/pressure compensation
- Addition / Subtraction
- Multiplication / Division
- Ratio / Bias
- Delay buffer / Ramp buffer
- Moving average
- Lead time / Dead time
- Linearization
- Square root extraction
- Palmer-Borlus flume / Parshall flume
- Triangular/v-notch/rectangular weir
- Inverted output
- High / Low limiting
- Track / Hold
- Peak / Valley hold
- High / Low selecting
- Channel switching
- Parameter generator

I/O CHARACTERISTICS EXAMPLES

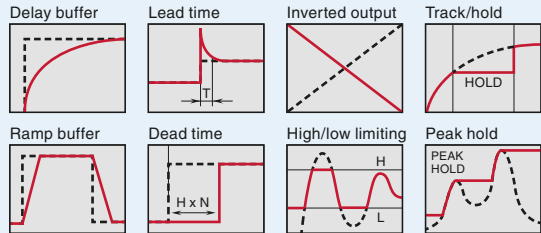

Self-Synch Transmitter M2EXS / MXS

- Converting position signals from a self-synchronizing motor into a DC signal proportional to the rotating shaft position
- Position indication using self-synch, tank gauge, sounding level meter

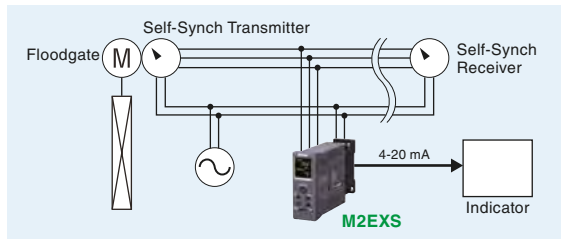

High Current Output Transmitter VA / SVA / 99SVA

- 200 mA, 1 A output to drive actuators used in turbines, speed governors, hydraulic machinery
- Retrofitting 10-50 mA loop




Potentiometer Output CVR1

- Remote setting for dampers, inverters, motors and other devices with potentiometer settings
- DC voltage/current input
- 135 Ω, 1k Ω and other outputs




I/P Transducer HVP / HVPN


- Semiconductor pressure sensor in the feedback circuit
- Max. air capacity 60 NL/minute

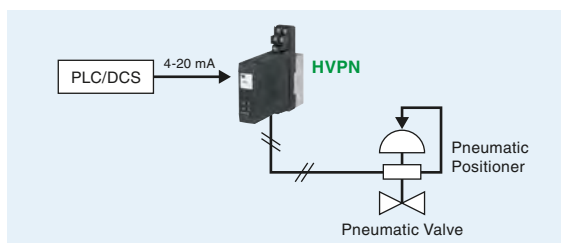

Damper Operation for Air Conditioning

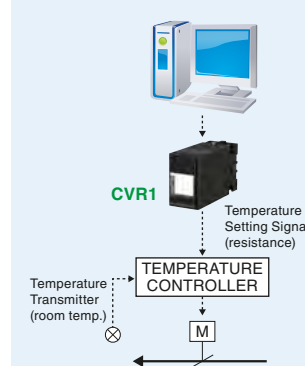

Motor Speed Setting

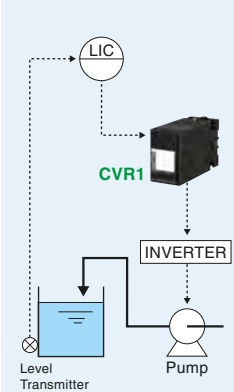

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components


Final Control Components

Lightning Surge Protectors

About Us & Locations

Strain Gauge Transmitters

Tank / silo / hopper weighing system

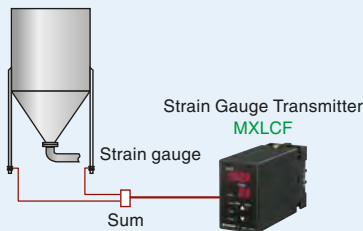

The MXLCF, in conjunction with multiple high-capacity load cells (strain gauges), provides an effective tank weighing system, with easy field configuration and local display capabilities.

“One-Step Cal” Configuration without PC M3LLC

- DIP switch or PC configurable
- <10 msec. response
- Auto tare feature controlled by PLC or DCS
- Manual on-site calibration



Fast Response Remote Sensing LCF

- Six-wire bridge
- <300 microsec. response (2 kHz, -3 dB)



Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

About Us & Locations

Limit Alarms

Quad/Octad Alarm with OEL Display M1EA Series

- Multi-line display showing parameters and selection in text: intuitive, easy programming
- 4-point SPDT or 8-point NO or NC contact (single-channel type)
- 2-point SPDT or 4-point NO or NC contact (dual-channel type)
- PC configuration is also available.



CE

Dual/Quad Alarm with OEL/LCD Display M2EA / M7E Series

- Multi-line display showing parameters and selection in text: intuitive, easy programming
- 2-point SPDT or 4-point NO or NC contact
- PC configuration is also available.



M2EA Series CE M7E Series CE

Dual/Quad Alarm with LED Display AS4 Series

- Simple configuration via the front Up/Down buttons with a help of two displays, by calling parameters' ID numbers (ITEM) and choosing values (DATA)
- Direct sensor input: DC, temperature, potentiometer, strain gauge and CT
- Field selectable sensor type and range
- 2-point SPDT or 4-point NO or NC output



CE cRU^{us}

Panel Surface Mount KS2V2 / KS2TR2

- 1/16 DIN size (48 mm square) panel cutout
- 1-5 Vdc input (KS2V2) or temperature (T/C or RTD) input (KS2TR2)
- Dual SPDT output



CE cRU^{us}

Simple Setting Analog Alarms

- Various setting methods are available: dial setting, thumbwheel switch setting, rotary switch setting, potentiometer setting.
- Direct sensor input type and extra DC transmitter output (AE-UNIT)



M2SED CE



M2AVS CE



AE-UNIT Series

Four-wire Signal Conditioners Selection Guide

Four-wire Signal Conditioners




- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights
- Remote I/O
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors
- About Us & Locations



SERIES	M5		W5	M2 / M2E	
Enclosure / Mounting type	41 mm-deep low-profile housing, DIN rail mount			Plug-in base socket, DIN rail or surface mount	
Connection	M3.5 screw terminal		M3.5/M3 screw terminal	M3 screw terminal	
Dual output	---		Yes	(M2WVS)	
Power input	AC/DC			AC/DC	
Isolation	2000V AC (M5/AC powered type: 1500V AC)			2000V AC	
Operating temperature	-5 to +55°C (23 to 131°F) (M5X: -20 to +65°C (-4 to +149°F))			-5 to +55°C (23 to 131°F)	
Standards & Approval	CE / UKCA (DC powered type)		CE (DC powered type)	M2: CE / UKCA / UL / C-UL M2E: CE	
Range Availability	Fixed range	PC configurable	Fixed range (except W5FV)	Fixed range	PC configurable (M2) Front display setting (M2E)
Isolators & Sensor Inputs					
Input loop powered isolator	M5SN			M2SN	
Isolator	M5YV				
Output isolator					
Universal input		M5XU			M2XU, M2XUM
DC mV, voltage & current	M5VS, M5MV	M5XV	W5VS, W5FV	M2VS, M2WVS	M2FV, M2XV2, M2EXV
DC mV, voltage & current (fast response)	M5VF, M5VF2			M2VF, M2VF2, M2VF3	
Universal temperature input		M5XTR			
Thermocouple	M5TS	(M5XTR)	W5TS	M2TS	M2XT2, M2EXT
RTD	M5RS	(M5XTR)	W5RS	M2RS, M2RS1	M2XR2, M2EXR
Potentiometer	M5MS		W5MS	M2MS	M2XM2, M2EXM
Current loop supply	M5D, M5DY		W5DY	M2D, M2D2, M2DYS	
Current loop supply, SQR				M2DL, M2DNY	
Current loop supply, HART	M5DYH2			M2DYH2, M2DYHR	
Strain gauge			W5LCS	M2LCS	
AC voltage & current	M5TG*, M5AC*			M2TG, M2AC	
Power Transducers					
Voltage transformer	M5PT			M2PA, M2PE	
Current transformer	M5CT			M2CA, M2CE	
Clamp-on current sensor	M5CTC			M2CEC	
Multi power transducer		M5XWT, M5XWTU			
Frequency I/O					
Pulse to analog	M5PA	M5XPA	W5PA	M2SP	M2XPA3
Encoder		M5XRP			M2XRP2
Analog to pulse	M5AP*			M2AP	
Pulse isolator	M5PP, M5YPD*			M2PP	
Pulse scaler, divider	M5PRU*			M2PRU, M2PDU	
Pneumatic Transducers					
19.6-98.1 kPa				M2PV	
Function Modules					
Multi function					
Four arithmetic functions		M5XADS, M5XSBS, M5XMLS, M5XDIS		M2ADS, M2SBS, M2MLS, M2DIS	
Ratio/bias		M5XREB, M5XRTS		M2REB, M2RTS	
Linearizer		M5XF			M2XF2
Square root extractor		M5XFLS		M2FL, M2FLS	(M2XF2)
Limiter				M2LMS	
Inverted output		M5XUDS		M2UDS2, M2UDS	
Delay buffer				M2CDS	
Ramp buffer		M5XCRS		M2CRS	
Track/hold		M5XAMS		M2AMS2, M2AMS	
Peak/valley hold		M5XPHS		M2PHS2, M2PHS	
High/low selector		M5XSES		M2SES2, M2SES	
Analog switching module				M2MNV	
Parameter generator		M5XMST		M2MST	

*Under development as of July 2023

Only typical signal conditioner modules and specs are mentioned in this table.
Please visit our web site to confirm availability and specs of specific models.

						SERIES
W2		M6 / M60		M3 / M3S / A3		
Plug-in base socket, DIN rail or surface mount		Ultra-slim housing, DIN rail mount		18 mm- or 12 mm-wide housing, DIN rail mount		Enclosure / Mounting type
M3 screw terminal		Tension clamp, M3 screw terminal, euro type terminal, mini-clamp (e-CON) connector		Euro type connector terminal		Connection
Yes		(M6xWVS, M60xWVS)		(M3SWVS)		Dual output
AC/DC		DC (M6xYV, M6xXU, M6xVS: AD/DC)		AC/DC		Power input
2000V AC		M6 Series: 2000V AC M60 Series: 1500V AC		2000V AC		Isolation
-5 to +55°C (23 to 131°F)		-20 to +55°C (-4 to +131°F)		M3: -20 to +65°C (-4 to +149°F) M3S: -10 to +55°C (14 to 131°F)		Operating temperature
CE / UKCA / UL / C-UL		M6: CE / UL / C-UL M60: CE		M3: CE / UL / C-UL, M3S: CE A3DYH: CE / ATEX / FM		Standards & Approval
Fixed range	PC configurable	Fixed range	PC configurable (M6) DIP SW setting (M60)	Fixed range	One-step cal (M3L) PC configurable (M3X)	Range Availability
Isolators & Sensor Inputs						
		M6xSN				Input loop powered isolator
		M6xYV, M60xYV		M3SYV		Isolator
						Output isolator
			M6xXU		M3LU2, M3LU	Universal input
W2VS		M6xVS, M6xWVS	M6xXV, M60xVS, M60xWVS	M3SVS, M3SWVS	M3LV, M3SXV	DC mV, voltage & current
W2VF		M6xVF				DC mV, voltage & current (fast response)
						Universal temperature input
W2TS	W2XT		M6xXT		M3LT, M3SXT	Thermocouple
W2RS, W2RS1	W2XR		M6xXR	M3SRS	M3LR, M3SXR	RTD
W2MS	W2XM		M6xXM	M3SMS	M3LM, M3SXM	Potentiometer
W2DYS		M6xDY		M3DY, M3SDY	M3LDY	Current loop supply
W2DNY					(M3LDY)	Current loop supply, SQR
W2DYH2				A3DYH (IS)		Current loop supply, HART
W2TG, W2AC					M3LLC	Strain gauge AC voltage & current
Power Transducers						
W2PA, W2PE						Voltage transformer
W2CA, W2CE						Current transformer
		M6xCTC				Clamp-on current sensor
						Multi power transducer
Frequency I/O						
W2SP		M6xPA			M3LPA2	Pulse to analog
						Encoder
W2AP			M6xXAP			Analog to pulse
W2PP		M6xPP				Pulse isolator
						Pulse scaler
Pneumatic Transducers						
W2PV						19.6-98.1 kPa
Function Modules						
			M6XF1, M6XF2			Multi function
			M6XF2			Four arithmetic functions
						Ratio/bias
	W2XF (W2XF2)		(M6XF1)			Linearizer
			(M6XF1)			Square root extractor
			(M6XF1)			Limiter
			(M6XF1)			Inverted output
			(M6XF1)			Delay buffer
			(M6XF1)			Ramp buffer
			M6XF3			Track/hold
			M6XF3			Peak/valley hold
			(M6XF2)			High/low selector
						Analog switching module
W2MST			(M6XF1)			Parameter generator

- Four-wire Signal Conditioners
- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights
- Remote I/O
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors
- About Us & Locations

TWO-WIRE SIGNAL CONDITIONERS

- Four-wire Signal Conditioners
- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights
- Remote I/O
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors

DIN Rail-mount Signal Conditioners

B5 Series

Low-profile Terminal Block Style

- Only 41 mm (1.61 in) deep, terminal block style modules can be installed anywhere, even behind the panel cover.
- Power LED
- 2000 Vac isolation between input and output



B3 Series

DIP Switch Configurable

- Input type and range selectable with the internal DIP switches and fine calibration using the front potentiometers
- Wide supply voltage range 12-45 Vdc
- 1500 Vac isolation between input and output



Field-mount Signal Conditioners

27 / 26 Series

DIN Type B Head-mount Transmitters

- **27 Series:** HART or PC programmable type available
- **26 Series:** Fixed range



27 Series



26 Series



B6U / B6U-B

Universal HART Temperature Transmitters

- Plug-in two-line LCD display
- HART programmable
- User's own temperature calibration tables can be used.
- IP66 / IP67 field enclosure; Stainless steel optional



B6U




B6U-B

IP66/IP67





High Accuracy




Pt100 CJC sensor placed between the input terminals (27HU, 27U, 27TS)

Function Monitor LED

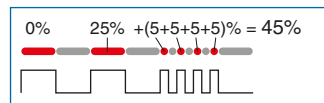

Flashing patterns of the light can tell you input signal level in 5% increments (27R, 27RS, 27PM)

FIELD-MOUNT ACCESSORIES

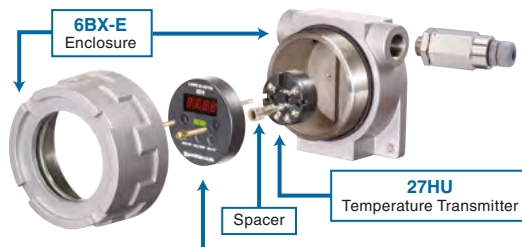

MD6 Series Surge Protectors








6DV / 6DV-B 4-digit Loop Powered Indicator

6DV

6DV-B



Two-wire Signal Conditioners Selection Guide

					
SERIES	B5	B3	B6 / 27	27	26
Enclosure / Mounting type	41 mm-deep low-profile housing, DIN rail mount	18 mm-wide housing, DIN rail mount	Field mount enclosure	DIN type B head mount	
Connection	M3.5 screw terminal	Euro type connector terminal	M3.5/M3 screw terminal	M3 screw terminal	Euro type terminal block
Power input	Output loop powered				
Isolation	2000V AC	2000V AC	1500V AC		
Operating temperature	-40 to +80°C (-40 to +176°F)	-40 to +85°C (-40 to +185°F)	-40 to +85°C (-40 to +185°F)		
Standards & Approval	CE	CE / UL / C-UL / ATEX / FM	CE / ATEX / FM	CE / ATEX / FM	CE
Input loop powered isolator	B5SN				
DC mV, voltage & current	B5VS	B3VS/1, B3VS/2, B3FV			
Thermocouple	B5TS	B3FT		27TS	26TS1
RTD	B5RS	B3FR		27R, 27RS	26R1, 26RS
Potentiometer	B5MS			27PM	
Pulse		B3FP			
Universal input				27U	
Universal input, HART, IS		B3HU, B3HU2	B6U, B6U-B, 27HU-B	27HU	
Universal input, PROFIBUS		B3PA			

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Simulation experiments demonstrate effectiveness of isolators




How to choose DC signal isolators



ISOLATOR APPLICATIONS 3


2-wire isolator : 4-20 mA input / 4-20 mA output (loop powered)

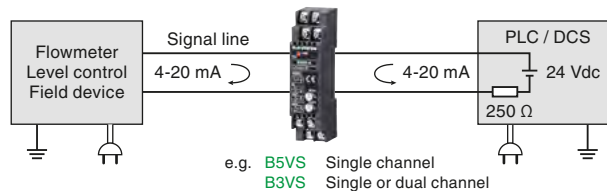


Basic isolator designed to interface a PLC and DCS system that provides a 24 Vdc power supply with a 4-20 mA input.

- Remote field signal monitored by control system
- Water/wastewater treatment
- Petrochemical, tank farms, large manufacturing sites

With the excitation supply to the field device

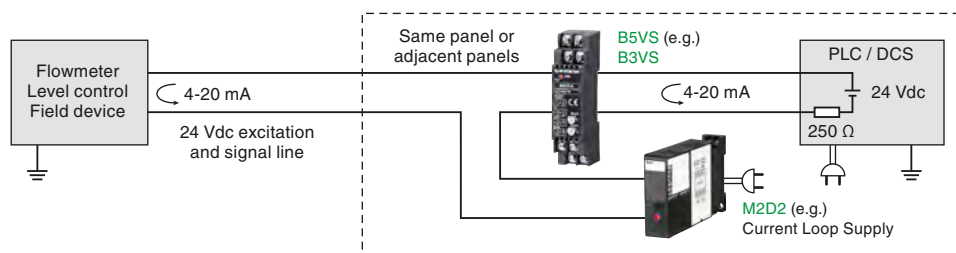

2-wire isolator : 4-20 mA input (loop powered) / 4-20 mA output

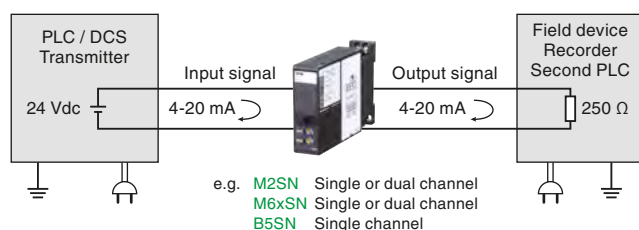

Mainly used to retrofit existing 4-20 mA process loops that need to add another instrument to the loop while maintaining isolation.

- Chart recorder or another PLC
- Backup monitoring system

About Us & Locations

POWER MONITORING COMPONENTS

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components


Final Control Components

Lightning Surge Protectors


About Us & Locations

Low-profile Multi Power Transducer M50XWTU


- Only 41 mm (1.61 in) deep, terminal block style modules can be installed even in shallow breaker boxes or on wall-mounted panels.
- Clamp-on current sensor input up to 600 A
- Single-phase 2-wire and 3-wire, three-phase 3-wire and 4-wire systems
- Max. 4 circuit inputs for single-phase/2-wire system, max. 2 circuit inputs for single- or three-phase/3-wire system
- Up to 31st harmonic distortion measurement
- Modbus plus two contact outputs (energy count pulse)

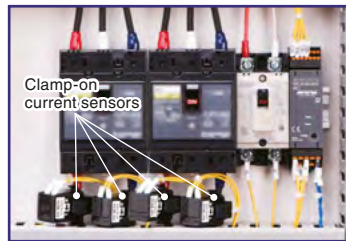


Modbus

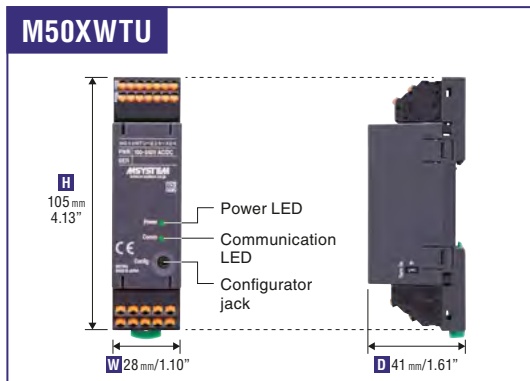


Detailed Monitoring of Energy Usage to Calculate Carbon Footprint of Products

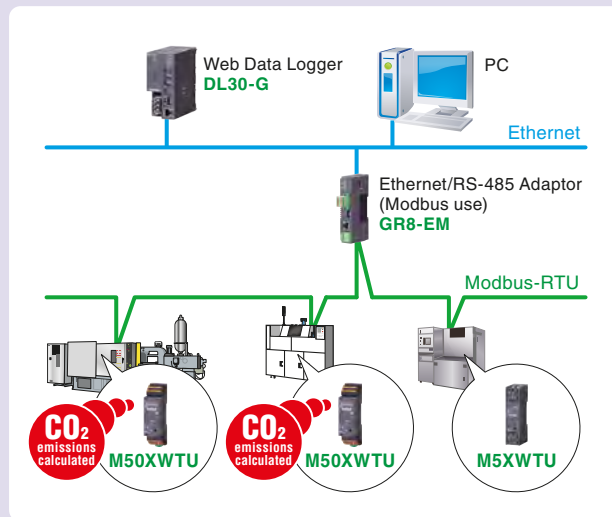

Many buildings and industrial installations still use only their monthly energy bills to grasp energy consumption of the entire facilities. Energy saving program starts with a visualization of detailed energy usage of each plant or equipment, which can be used to pinpoint the locations where energy is wasted. A simple power monitoring system built with a minimum time and cost is effective for the energy usage visualization.

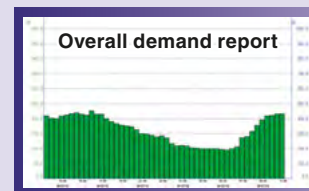


Improving Production Line Operation

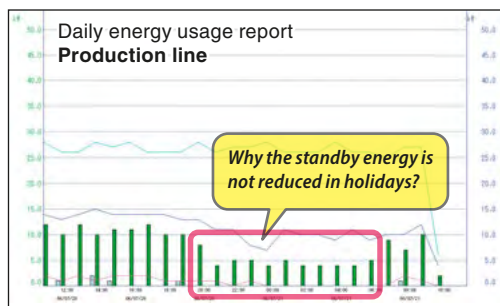

1. Reviewing the operation cycle of reflow furnaces to balance productivity and energy consumption
2. Analyzing the manufacturing process in details to pinpoint the wasted standby energy

Managing Air Conditioning System

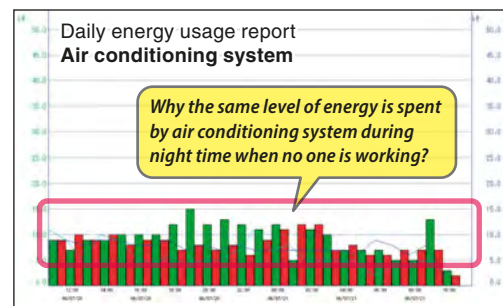

1. Reviewing and resetting room temperature setting
2. Introducing automatic air conditioner operation schedule
3. Thorough employee education to turn off the air conditioner in locker rooms and meeting rooms when they are vacant

M5X Series Multi Power Transducers

- Only 41 mm (1.61 in) deep, terminal block style modules
- Clamp-on current sensor input up to 600 A
- Up to 31st harmonic distortion measurement (M5XWTU)
- Analog or pulse output option (M5XWTU)
- Basic model M5XWT without harmonic distortion measurement



M5XWT(U)

Modbus

CLSE Clamp-on Current Sensor

- Easy-to-install, spring-loaded, clamp-on type current sensor
- 5 A, 50 A, 100 A, 200 A, 400 A, 600 A



CE

53U / 54U Series Multi Power Monitors

- Single-phase 2-wire and 3-wire, three-phase 3-wire and 4-wire systems
- Various network communication and Ao/Do combinations selectable
- Up to 31st harmonic distortion measurement
- IP50 front panel (53U, 54U)



L53U: DIN rail mounted

CE Modbus

IP50



53U: 1/4 DIN (96-mm sq.) panel size

CE C^{RU} US Modbus

IP50



54U: 110-mm sq. panel size

Modbus CC-Link LONWORKS

R7 Series Remote I/O

- Clamp-on current sensor use: easy installation
- 2-system input

CC-Link Modbus
Modbus/TCP LONWORKS



R3 Series Remote I/O

- 4-point totalized pulse input module for pulse pickups
- Other heavy current system input modules: AC voltage/current, zero-phase current, wattage
- Temperature, DC and other sensor signal inputs are also available.

CC-Link CC-Link IE^{field}
DeviceNet Modbus/TCP
EtherNet/IP LONWORKS
MECHATROLINK MECHATROLINK-III EtherCAT
FL-net T-Link



R9 Series Remote I/O

- Clamp-on current sensor use: easy installation
- Up to 8-system input
- Time stamped data logging in SD card

CC-Link Modbus
Modbus/TCP LONWORKS



LSMT4 Multi Power Transducer

- Measuring AC current, voltage, active/reactive/apparent power and power factor
- 10 x DC voltage/mA outputs plus 2 x Do

CE



LT-UNIT Series Power Transducers

- True RMS sensing
- M4 screw terminals
- Max. 550 Vac input
- Conforming to IEC 60688

CE



INDICATORS & TOWER LIGHTS

- Four-wire Signal Conditioners
- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights**
- Remote I/O
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors

About Us & Locations

Digital Panel Meters

Bright, Colorful LED

47L Series

- 1/8 DIN size (96 x 48 mm)
- Red, Orange, Green, Bluegreen, Blue and White LED selectable
- 4 or 4 1/2 digit display
- Alarm and/or transmitter output optional
- IP66 front panel
- Separable terminal block



IP66



High Performance LCD Display

47D Series

- 1/8 DIN size (96 x 48 mm)
- 5 1/2 digit display plus small 20 segment bargraph
- Main display color can be changed from green to red in alarm.
- Alarm and/or transmitter output optional
- 12 V or 24 Vdc sensor excitation
- RS-485 Modbus-RTU interface optional
- IP66 front panel
- Separable terminal block



IP66



Bargraph



Sub display

Large 0.8" High LED Display

40 Series

- 1/8 DIN size (96 x 48 mm)
- 3 1/2 or 4 digit display
- Display hold function



1/32 DIN Size Meters

43 Series

- 1/32 DIN size (48 x 24 mm)
- Easy-to-wire tension clamp connecting
- 24 Vdc powered or loop powered (no external power supply required)
- 43E Series with alarm output



Ultra-slim Housing with Flat Rear Surface

47NL Series

- 1/8 DIN size (96 x 48 mm)
- Large 16 mm-high, 4 or 4 1/2 digit display: Bright and colorful
- Mountable on standard 30 mm round panel cutout
- Tension-clamp or screw terminal block for electrical connection
- IP66 (except for magnet mounting)
- Moving average function to suppress display flickering
- High/low alarm trips




IP66



Mounting of Tension-clamp Terminal Block Type

● Using magnet

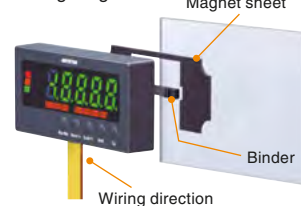

● Using screws



Digital Panel Meters Selection Guide

APPLICATION	47NL	47L	47D	40	43
DC input, input loop powered	47NLN, 47NLNT	---	---	40DN	43AL1
DC input	47NLV, 47NLVT	47LYV, 47LV	47DV	40LV, 40DV1	43DV2, 43EV
Thermocouple input	---	47LT	47DT	40DT	---
RTD input	47NLR, 47NLRT	47LR	47DR	40DR	---
Potentiometer input	---	47LM	47DM	---	---
2-wire transmitter input (with excitation)	47NLDY, 47NLDYT	---	---	---	43EDY
Strain gauge input	---	47LLC	---	---	---
AC current / voltage input	---	47LAC	47DAC	---	---
PT input	---	47LPT	---	40DPT	---
CT input	---	47LCT	---	40DCT	---
Frequency input (AC line voltage)	---	47LHZ	---	---	---
Frequency input	---	47LPA	---	---	---
Pulse input totalizer (6 digits)	---	47LPQ	---	---	---

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

About Us & Locations

Bargraph Indicators

48N Series Bargraph Indicators

- 9/64 DIN size (36 x 144 mm)
- 101-segment, 3 mm wide LED
- Red, amber, green and blue colors
- Alarm and/or transmitter output optional
- Vertical or horizontal mounting
- Custom scale with no extra cost
- IP65 front panel
- Separable terminal block



48NV
• Single or dual bars



48NAV
• Single bar
• Dual/quad alarm



48NDV
• Single bar
• Dual/quad alarm
• 4-digit digital display

48SV2 Bargraph Indicator

- 18 x 72 mm size
- 51-segment LED
- Red, amber, green and blue colors
- Vertical or horizontal mounting
- Custom scale with no extra cost
- Zero & span adjustments at the front panel
- Separable terminal block optional



48SV2



APPLICATION	48NV	48NA	48ND
DC input, single channel	48NV-1	48NAV	48NDV
DC input, dual channel	48NV-2	---	---
DC input, transmitter output	---	48NAVA	48NDVA
4-20 mA input, excitation supply	---	48NAVD	48NDVD
Thermocouple input	---	48NAT	48NDVT
RTD input	---	48NAR	48NDR
Potentiometer input	---	48NAM	48NDM

Field Indicators

6DV / 6DV-B Loop Powered Field Indicator

- 4-20 mA input loop powered
- No external power source required
- Scaling & linearization selectable via the front control buttons
- IP66 / IP67 field enclosure, aluminium or stainless steel
- ATEX Zone 0, FM Class I, II, III, Division 1 approvals



6DV



6DV-B

IP66/IP67



W100 Weighing Indicator


Automatic Quantitative Feeding Control

The W100 repeats precise and stable measurement of liquid or powder to perform a quantitative feeding control while displaying accurate weight values.



- Four-wire Signal Conditioners
- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights**
- Remote I/O
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors


- 72 x 144 mm size
- Highly visible LCD with white characters
- Weighing functions: feeding and discharging
- Control functions: simple comparison or sequence control
- Weighing stability functions: digital low pass filter, moving average, stability detection, stable state filter
- Max. 32 preset values (CODE) can be registered.
- 12-point discrete outputs and 12-point discrete inputs
- IP65 front panel
- Modbus communication

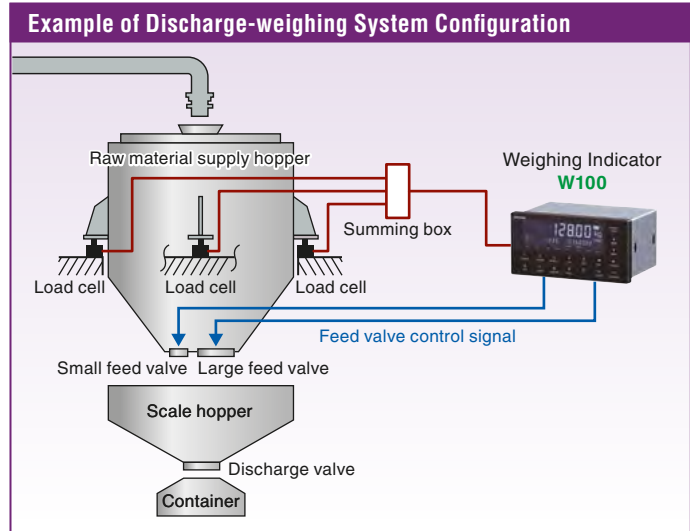

IT Series Tower Lights

Wireless & Open Network Capable Tower Lights

- Energy saving, maintenance free LED lights
- Bright and even illumination
- Direct Modbus/TCP and CC-Link control saves wiring and cost.
- Wireless LAN access point and infrastructure mode (IEEE 802.11b/g/n, 2.4 GHz) certified for use in the EU countries
- Licence-free 900 MHz ISM band, FCC Part 15 compliant wireless module certified for use in the US

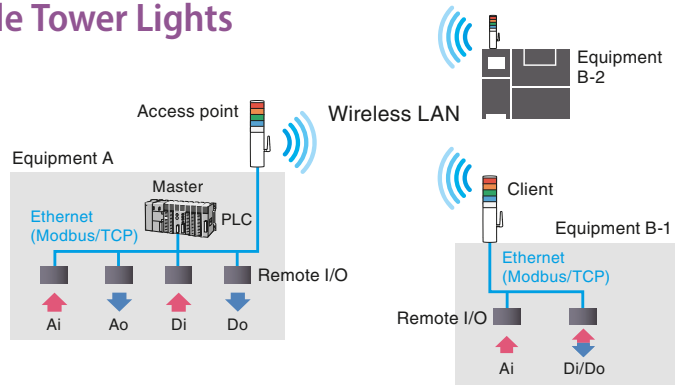

LED DIAMETER	WIRELESS LAN		900 MHz ISM BAND		OPEN NETWORK		DISCRETE INPUT		
	For EU countries		FCC Part 15 compliant				Tall	Short	Pole mounting
	Bridge	Access point	Parent	Child	Modbus/TCP	CC-Link			
40 mm	IT40SW1	IT40SW2	IT40SW5F	IT40SW6F	IT40SRE	IT40SRC	IT40SA1	IT40SA2	IT40SA3
50 mm	IT50SW1	IT50SW2	IT50SW5F	IT50SW6F	IT50SRE	IT50SRC	IT50SA1	IT50SA2	IT50SA3
60 mm	IT60SW1	IT60SW2	IT60SW5F	IT60SW6F	IT60SRE	IT60SRC	IT60SA1	IT60SA2	IT60SA3

REMOTE I/O

The flexibility and scalability of our Remote I/O supports future system upgrades with full isolation between power-communication-I/O and between analog channels. Economical non-isolated analog modules are also selectable.

Applications include: signal concentrator, data collection in flow and level monitoring, injection molding monitoring and control, test stands and prototyping, glass furnace temperature control, pharmaceutical processes, semiconductor manufacturing equipment, assembly line discrete ON/OFF, and IoT equipment.

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

About Us & Locations

Remote I/O

Scalable I/O
with free combination of I/O, network and power supply

LARGE NUMBER OF I/O POINTS

Multi-channel,
Scalable Remote I/O


R3 Series



Hot Swappable Modules

Compact,
Scalable Remote I/O

R30 Series



Compact size

Slice Type,
Scalable Remote I/O

R8/R80 Series



Flexible Configuration without Base

SMALL NUMBER OF I/O POINTS

Ultra-Slim,
Scalable Remote I/O

R6 Series



Only 78 mm wide with 8 I/O modules

All-in-One I/O
with I/O, network and power supply in single package

LARGE NUMBER OF I/O POINTS

Compact,
Multi-point Remote I/O

R1 Series



12-point Universal Input Module

SMALL NUMBER OF I/O POINTS

Expandable,
Compact Remote I/O

R7 Series



Attached with Discrete I/O Extension Module

Plug-in Remote I/O

R10 Series




I/O module Base
Base Socket Mounted Module


Multi-channel, Scalable Remote I/O

R3 Series

- Wide selection of I/O modules including DC, AC, temperature, strain gauge, pulse trains, AC power, etc.
- 4 isolated to 16 non-isolated analog inputs per module
- Max. 64 discrete I/O per module
- Selections of AC power, CT and VT modules suitable for energy monitoring applications
- Dual redundant communication networks and power supplies

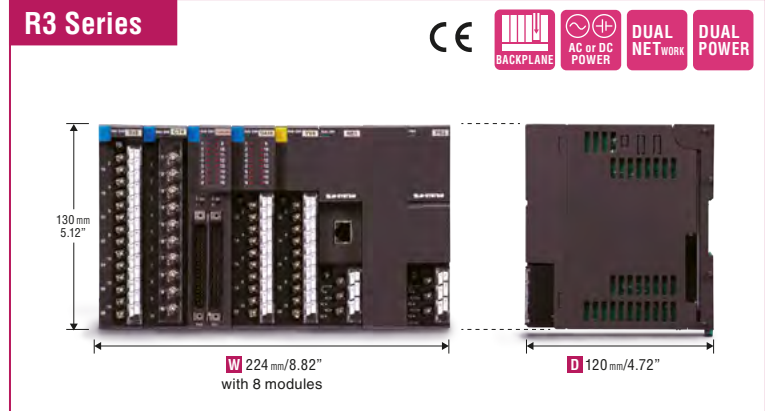

Free Combinations of Network and I/O Modules on Backplane Base

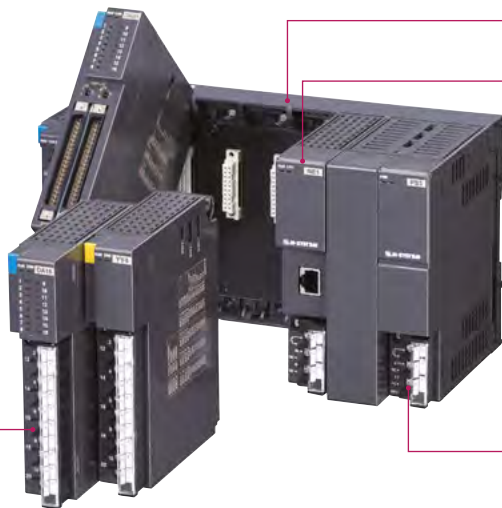

- Backplane Base
- Network Module
- Power Supply Module



I/O Module




- | | |
|---|---|
| • DC input module 24 models | • Alarm module 7 models |
| • Sensor input module 19 models | • Discrete I/O module 28 models |
| • AC power input module 16 models | • BCD I/O module 2 models |
| • Analog output module 7 models | • Function module for air conditioning 2 models |
| • Pulse I/O module 13 models | • Temperature control module 1 model |

Three Types of I/O Connections



- Four-wire Signal Conditioners
- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights
- Remote I/O**
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors
- About Us & Locations

Dual Communication Networks and Power Supplies

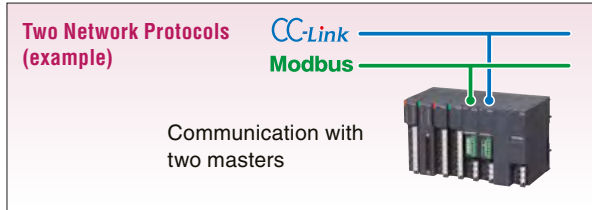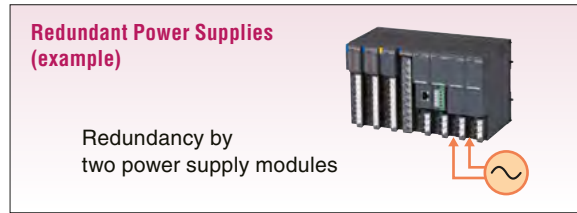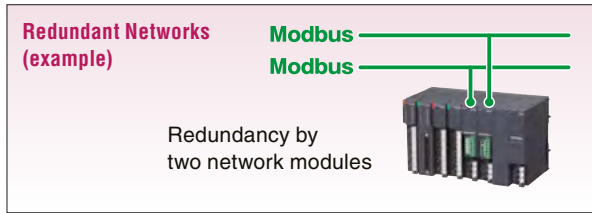

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

About Us & Locations

Compact, Scalable Remote I/O


R30 Series

- Ethernet based network protocols
- High-speed internal bus
- 2 or 4 fully-isolated analog I/O per module
- 16 discrete I/O per module
- R3 Series I/O modules can be added by using special connecting base.




R30 Series + R3 Series I/O modules

R30 Series

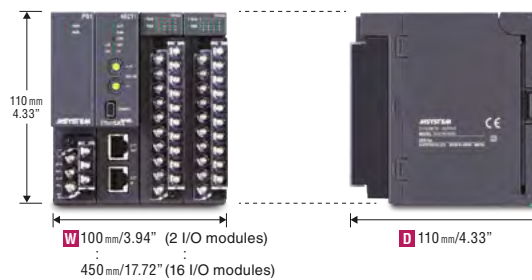

Free Combinations of Network and I/O Modules on Backplane Base

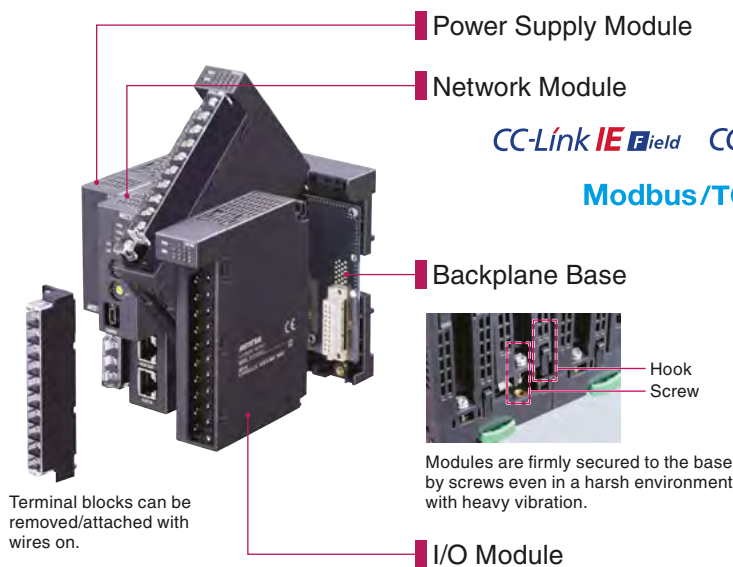

CC-Link IE **field**


CC-Link IE **TSN**

Ether**CAT**

Modbus/TCP

OPC **UA**


Internal Bus Communication Cycle
1 millisecond per 256 points

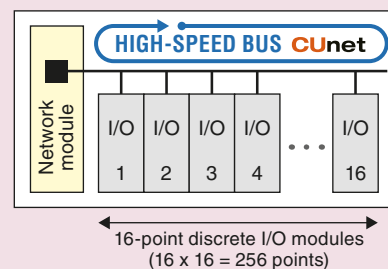


Slice Type, Scalable Remote I/O

R8 / R80 Series

- Slice type modules can be freely added by necessary number of I/O points, saving installation space to the minimum.
- Only 55 mm (2.17 in) deep modules (except connector)
- Interlock and other special function modules requested for semiconductor manufacturing equipment

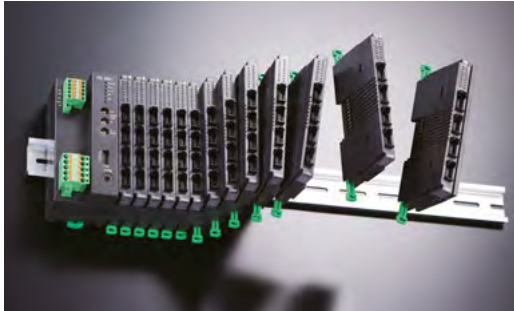

R8 Series

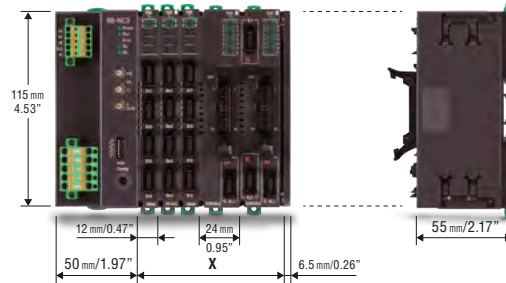


X : Calculate by number of 12-mm and 24-mm wide modules (max. 16)


R8 Series Networks



R80 Series Realizes High-speed Internal Bus Communication

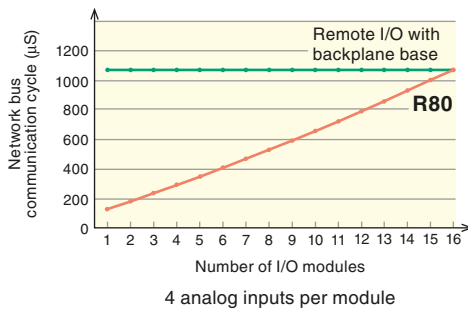

R80 Series

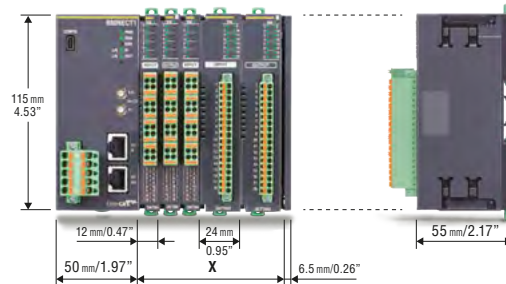


X : Calculate by number of 12-mm and 24-mm wide modules (max. 16)


R80 Series Networks



Bus communication cycle: backplane base

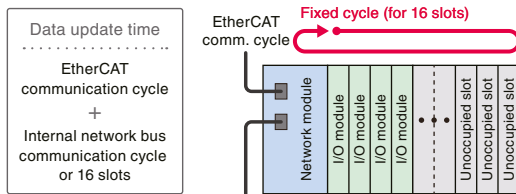

Bus communication cycle: slice type I/O

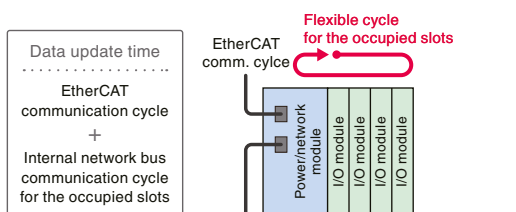

I/O Connection Types



R80 Series
Tension-clamp terminal block

R8 Series



Mini-clamp (e-con) connector



MIL connector




Tension-clamp terminal block

Ultra-slim, Scalable Remote I/O

R6 Series



CE

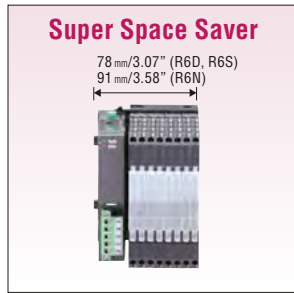

- Only 78 mm (3.07 in) wide with the minimum system of 8 modules
- Extension by 8 module units — Max. 31 I/O modules
- 2 fully-isolated analog I/O per module
- 4-point discrete I/O per module
- Low power consumption

CC-Link DeviceNet PROFIBUS Modbus Modbus/TCP T-Link

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Compact, Multi-point Remote I/O

R1 Series

- Economical all-in-one module for Modbus, CC-Link and DeviceNet
- Trigger contact input and alarm contact output
- 12-point universal inputs
- 8- or 16-point TC/DC inputs
- 8-point RTD inputs
- 4-point totalized counter inputs and 8-point contact I/O
- 32-point contact inputs or outputs



CE

CC-Link DeviceNet Modbus

Expandable, Compact Remote I/O

R7 Series

- Palm-top size compact module can handle 4 analog input, 2 analog output or 16 discrete signals.
- 8 or 16 discrete input/output module can be attached to the base module.



CE cRU^{us}


CC-Link DeviceNet Modbus Modbus/TCP LONWORKS

MECHATROLINK T-Link FLEX NETWORK[®] HLS Hi-speed Link System

About Us & Locations

R7 Series

CE

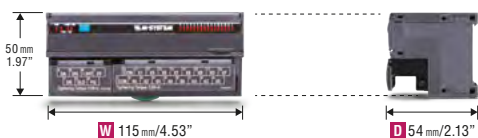

Compact Remote I/O for FA Control Equipment

R7 Series

- Compact, terminal block style, all-in-one modules
- 16-point, 32-point or 64-point DI, DO or I/O-mixed modules; analog I/O types are also available.
- Various I/O terminal styles are selectable.



More R7 series products are available for CC-Link, DeviceNet, Modbus/TCP, HLS and MECHATROLINK-I, -II.













CC-Link				CC-Link			
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS				
R7F4DC		Mini-clamp connector (e-CON)					
		Tension clamp terminal	DI16	DO16	DI 8 DO8		
		One-touch connector					
R7F4HC		FCN connector	DI32	DO32	DI 16 DO16		
DeviceNet				DeviceNet			
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS				
R7F4DD		Tension clamp terminal	DI16	DO16	DI 8 DO8		
		Mini-clamp connector (e-CON)					
R7F4HD		MIL connector	DI32	DO32	DI 16 DO16		
EtherCAT				EtherCAT			
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS				
R7I4DECT		Mini-clamp connector (e-CON)	DI32		DI 16 DO16	AI AO	
Ethernet/IP				Ethernet/IP			
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS				
R7F4HEIP		Tension clamp terminal	DI16	DO16	DI 8 DO8		
R7G4HEIP		M3 screw terminal	DI16	DO16			

- Four-wire Signal Conditioners
- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights

Remote I/O

- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors

About Us & Locations

Modbus/TCP				Modbus/TCP		
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS			
R7K4FE		M3 screw terminal		D016		
HLS				HLS High-speed Link System		
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS			
R7F4DH		Mini-clamp connector (e-CON), MIL connector, Tension clamp terminal	D116	D016	DI 8 DO8 or DI 16 DO16 (MIL connector)	
R7K4DH		Mini-clamp connector (e-CON)			DI 16 DO16	
R7G4HH		M3 screw terminal				AI AO
MECHATROLINK-III				MECHATROLINK MECHATROLINK - III		
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS			
R7K4FML3		M3 screw terminal	D132	D032	DI 16 DO16	
R7K4JML3		Tension clamp terminal			DI 32 DO32	
R7G4FML3		M3 screw terminal or Mini-clamp connector (e-CON)	D116	D016		
R7F4HML3		MIL connector			DI 16 DO16	
R7G4HML3		M3 screw terminal				AI AO
MECHATROLINK-I, -II				MECHATROLINK MECHATROLINK - I, -II		
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS			
R7K4FML		M3 screw terminal	D132	D032	DI 16 DO16	
R7K4DML		Mini-clamp connector (e-CON)	D132		DI 16 DO16	
R7G4HML		M3 screw terminal				AI AO

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors


About Us & Locations

Wireless I/O System for IoT

- Convenient wireless converters/gateways to collect field sensor data
- Remote monitoring using your mobile terminals via the internet

Use of wireless products is restricted by national radio regulations of individual countries. Please consult us for the details of certified products.

- Four-wire Signal Conditioners
- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights
- Remote I/O
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors

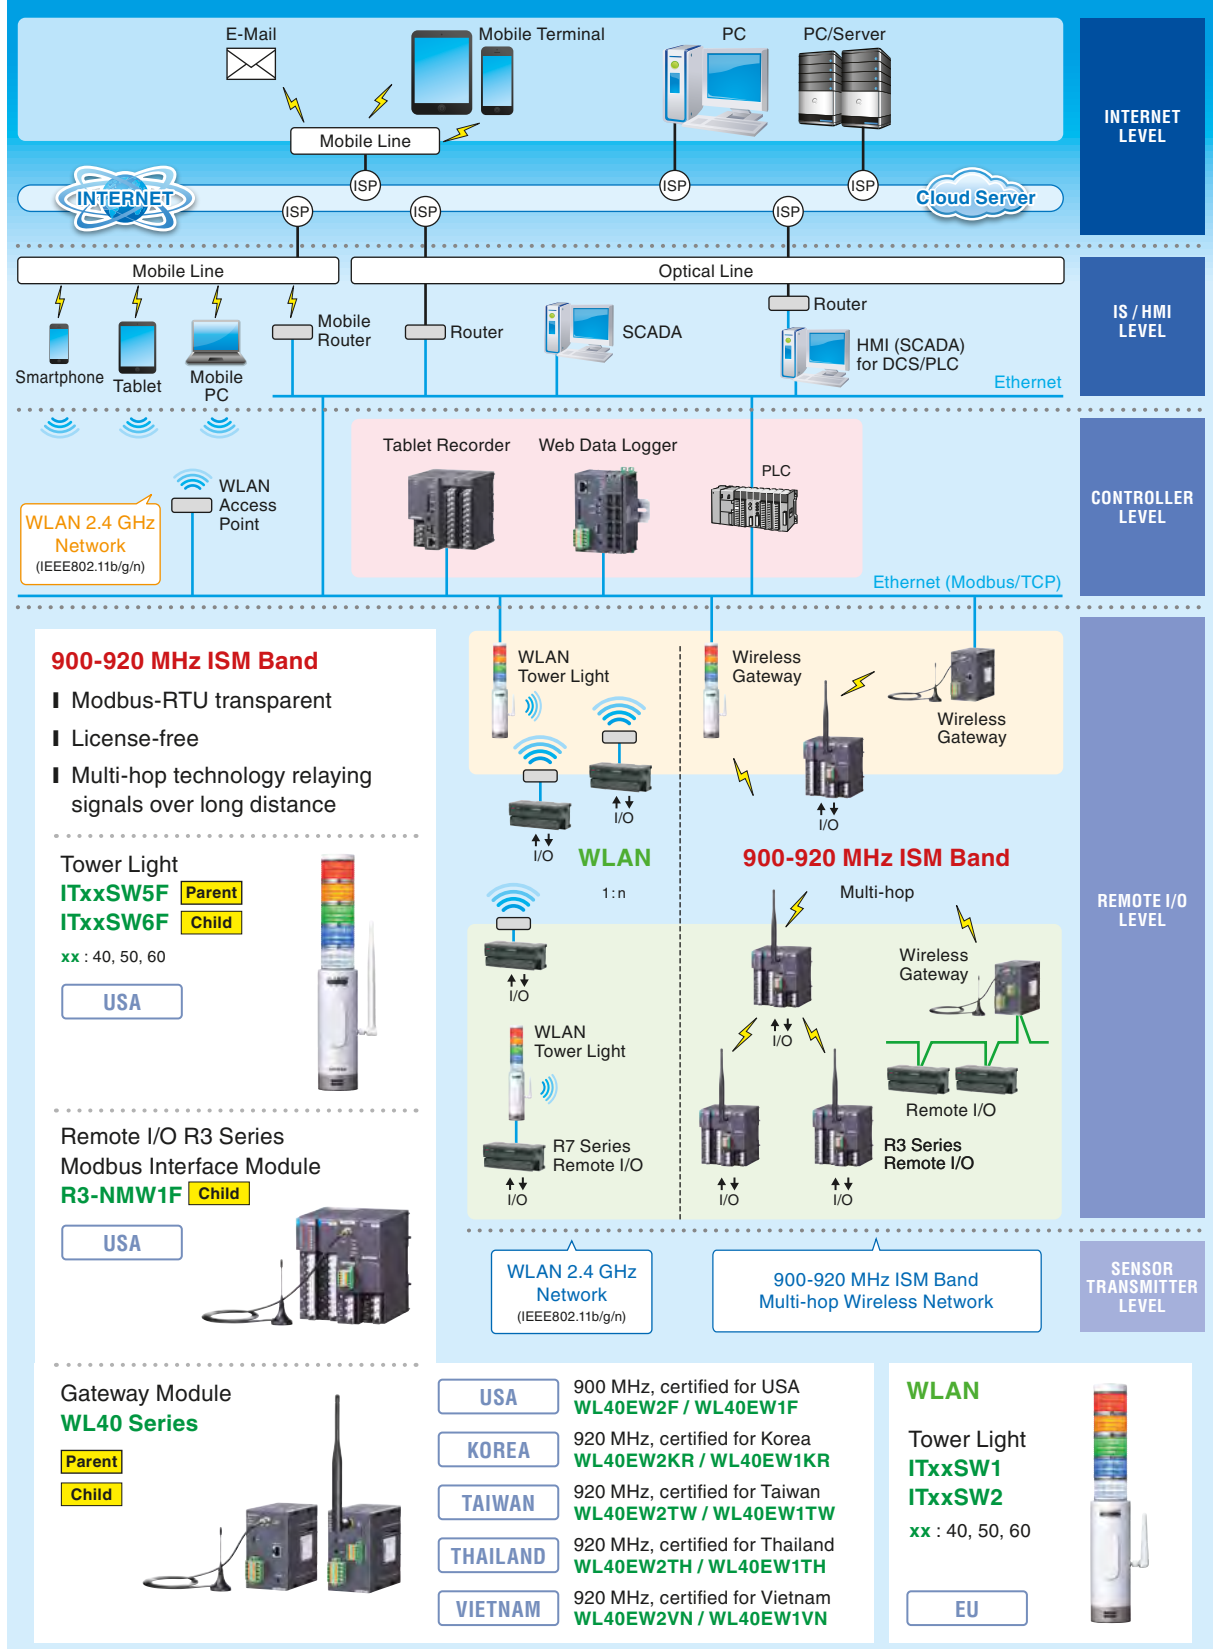

900-920 MHz ISM Band

- Modbus-RTU transparent
- License-free
- Multi-hop technology relaying signals over long distance

Tower Light

ITxxSW5F Parent
ITxxSW6F Child

xx : 40, 50, 60

USA



Remote I/O R3 Series Modbus Interface Module

R3-NMW1F Child

USA



Gateway Module WL40 Series

Parent
Child



- USA: 900 MHz, certified for USA **WL40EW2F / WL40EW1F**
- KOREA: 920 MHz, certified for Korea **WL40EW2KR / WL40EW1KR**
- TAIWAN: 920 MHz, certified for Taiwan **WL40EW2TW / WL40EW1TW**
- THAILAND: 920 MHz, certified for Thailand **WL40EW2TH / WL40EW1TH**
- VIETNAM: 920 MHz, certified for Vietnam **WL40EW2VN / WL40EW1VN**

WLAN

Tower Light
ITxxSW1
ITxxSW2
xx : 40, 50, 60

EU



Components for Building Automation

The central HVAC (Heating, Ventilation and Air Conditioning) control system is an air-conditioning system, in which a heat source system, including boilers, chillers, and conveying pumps concentrated in one place, produces and sends chilled water, hot water, or steam to the heat exchangers, e.g. air handling units (AHUs) and fan coil units (FCUs) on each floor, thus performing the cooling or heating of the entire building.

We developed Direct Digital Controller (DDC) and remote I/O modules specialized for building automation.

Some products are only available in Japanese market. Please consult us for further information.




Glossary
 AHU : Air Handling Unit (i.e. air conditioner)
 VAV : Variable Air Volume (variable air volume unit)
 FCU : Fan Coil Unit
 DDC : Direct Digital Controller

Legend
 — BACnet/IP
 - - - Modbus-RTU and BACnet MS/TP
 - - - Individual wiring
 — Chilled water supply pipe
 — Chilled water return pipe
 — Hot water supply pipe
 — Hot water return pipe
 — Cooling water supply pipe
 — Cooling water return pipe

- Four-wire Signal Conditioners
- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights
- Remote I/O
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors

About Us & Locations

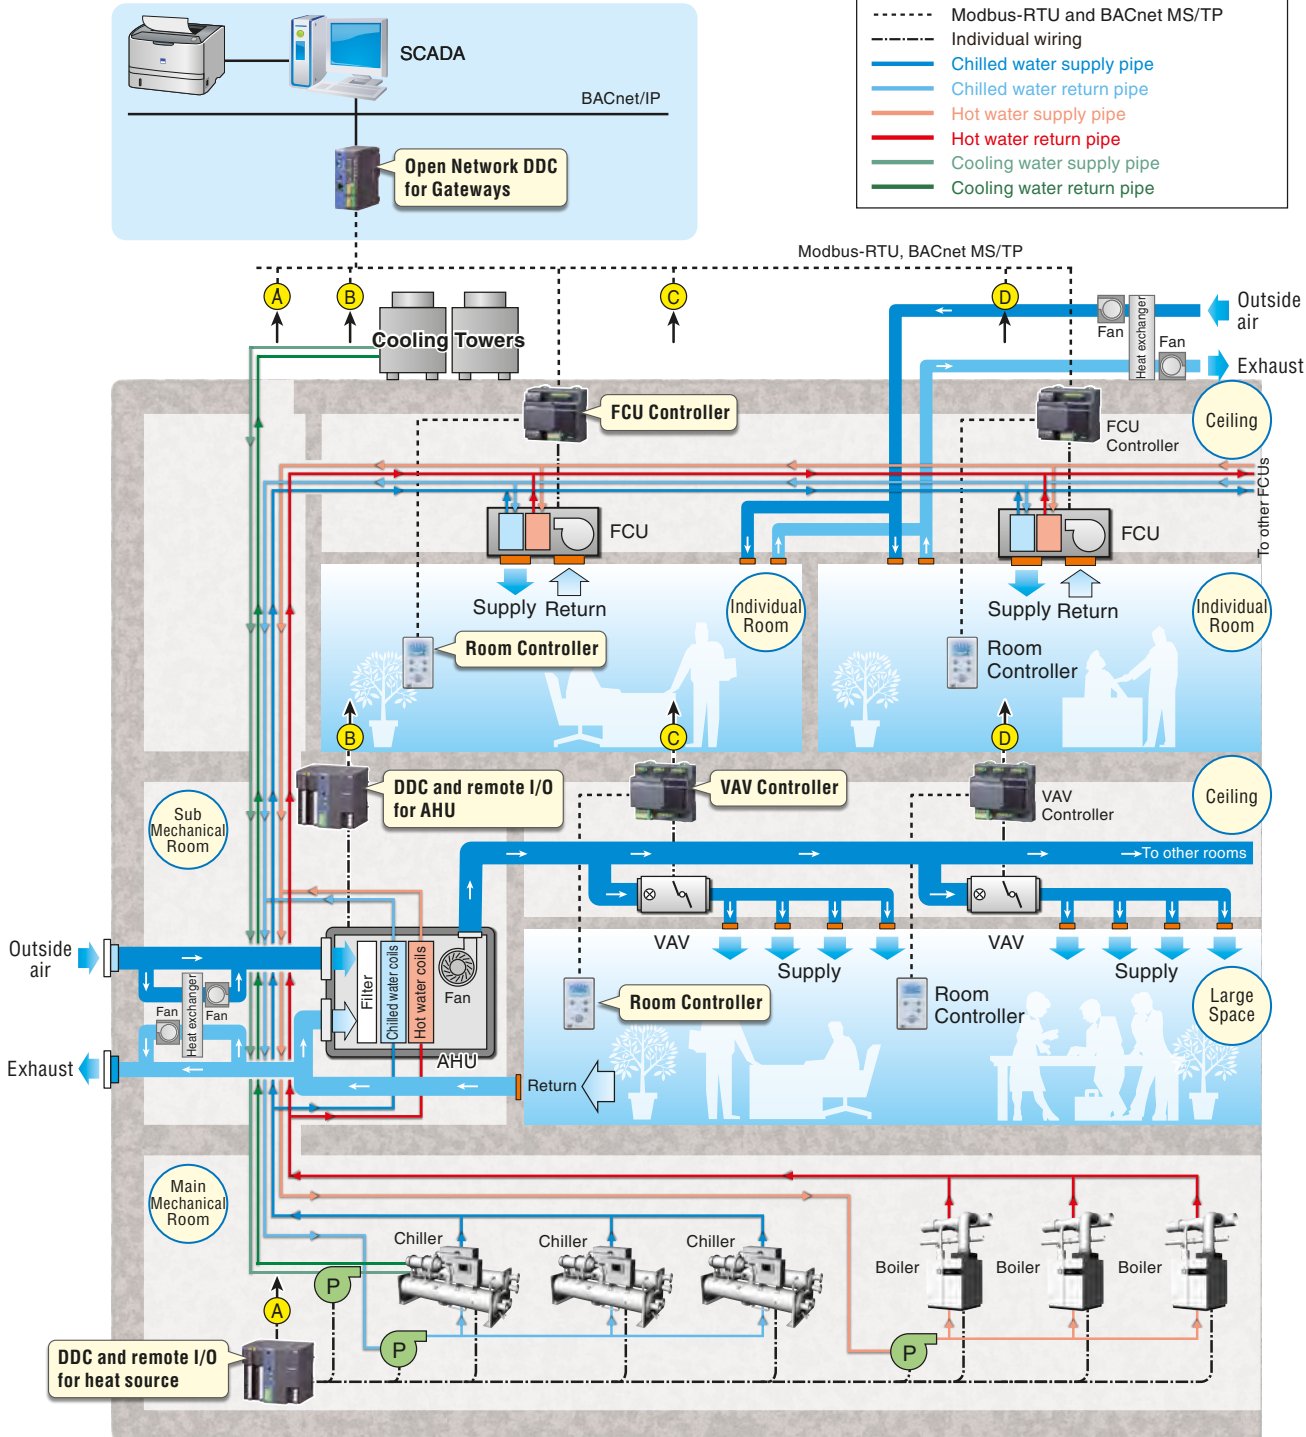

PAPERLESS RECORDING SYSTEM

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

About Us & Locations

TR30-G Tablet Recorder Web-enabled DAQ System

- Compact package
- No need of dedicated application software other than a web browser
- Flexible built-in I/O modules plus extended Modbus slave I/O
- Large main memory plus auxiliary SD card
- Regular and event e-mailing
- FTP server and client
- Modbus/TCP master and slave
- SNMP client
- User's original browser view



H
110 mm
4.33"

D
98 mm
3.86"



Model TR30-G is a web-based data acquisition system enabling users to view and access stored data via an internet browser. Freed from a dedicated display screen, accessibility and portability of the data is greatly enhanced.

In addition, users can receive free benefit of ever-evolving state-of-the-art user interface and apps provided by tablet terminals: i.g. ultrahigh resolution screen, intuitive touch panel operations, entering comments by dictation or hand-writing, capturing a screen shot and e-mailing, etc.

At the maximum of 64 analog inputs (16-bit data), 64 discrete inputs, 64 discrete outputs, 32 pulse inputs (32-bit data) plus 32 function inputs (mathematical, logic, filter, etc.) are usable. At the maximum of 120 channels can be plotted on the charts and stored at the storing cycle of 1 minute. The fastest storing cycle is 5 milliseconds for 16 channels, 100 milliseconds for 32 channels.


Freedom from dedicated display screen — Enhanced data accessibility and portability

PLANT FIELD MAINTENANCE

Operators can bring in tablets and smart phones to access trend data while freely walking around the site. Data can be transferred to PC via FTP or via SD card.

TEST AND RESEARCH


Researchers can access data logged at a test lab in a remote building while working in their own office.

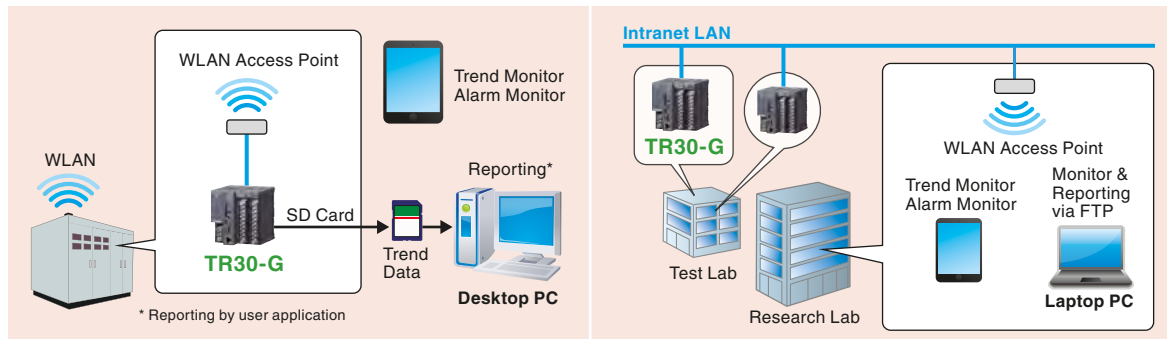

Browser Views



System Configuration

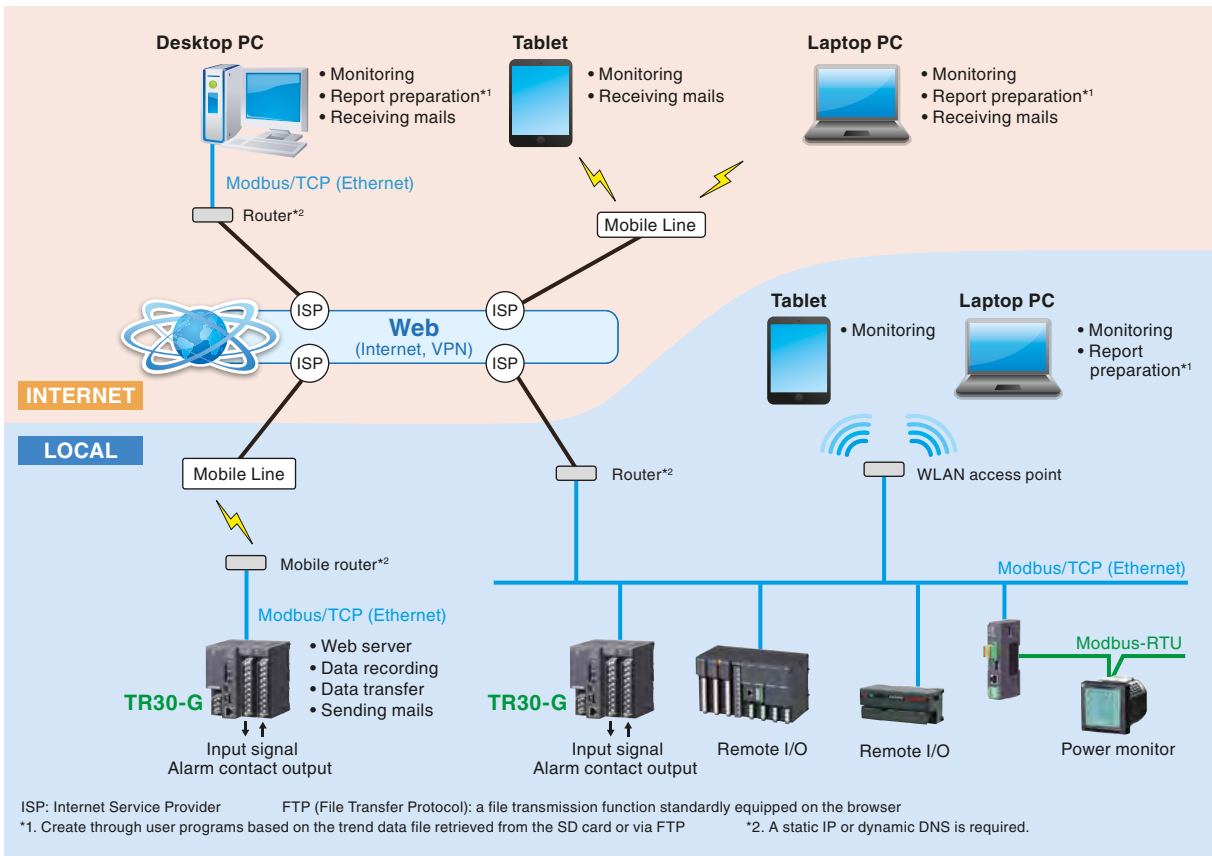

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

About Us & Locations

73VR Series Paperless Recorder


- Touch panel operated 5.5 inch TFT color LCD display
- 144 mm square DIN standard panel size
- Data can be transferred in real time to the host PC via Ethernet, viewed and stored on the MSR128 PC Recorder program.

IP65




Remote I/O Acquisition: 73VR1100

- Recording up to 128-point data transmitted from independent I/O located remotely in the field, or inside an instrumentation or control cabinet
- Instead of using expensive sensor cables, reduce wiring runs by using field networks.
- I/O separated 73VR1100 provides an installation flexibility, fitting in the tight space of a control panel or machinery chassis.

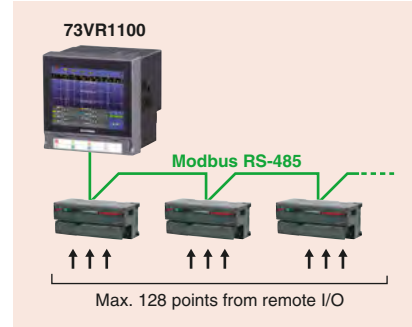


Built-in Universal Input: 73VR2100

- DC current/voltage, thermocouple and RTD inputs from 2 to 12 points
- Independent input type and range selectable for each channel
- 100 msec. storing rate up to 6 points

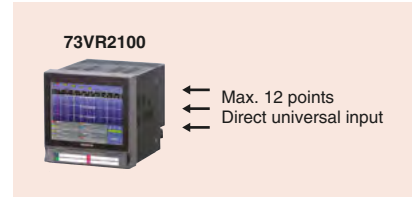

Selectable I/O Modules: 73VR3100

- Up to four R3 Series I/O modules (max. 64 points) can be selected and mounted at the rear of the recorder.
- Compatible with various open networks to communicate with major PLC: the 73VR3100 used as remote I/O with local display and recorder, integrated in a PLC control system
- 20 msec. storing rate with the combination of 8 analog and 8 discrete inputs

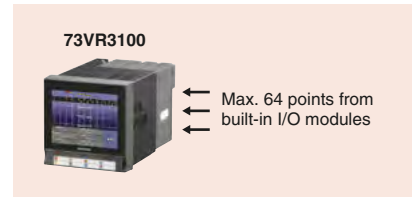

71VR1 Compact Paperless Recorder


- 1/4 DIN size (96 x 96 mm) panel mount compact recorder
- 3.5 inch TFT color LCD display
- Max. 8-point each of analog and discrete inputs are stored, displayed and alerted.
- Max. 8-point discrete outputs can be assigned to alarm trips.
- Direct field inputs at the built-in terminals and optional remote inputs via Modbus RTU

CE


IP65




Remote I/O Type 71VR1-E001

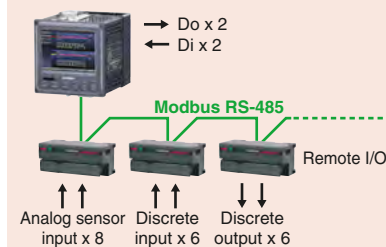

DC Input Type 71VR1-E101

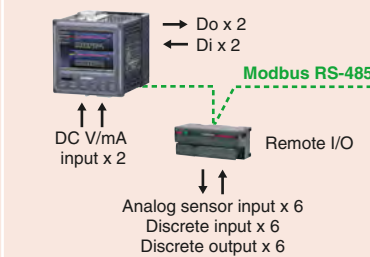

Universal Input Type 71VR1-E501

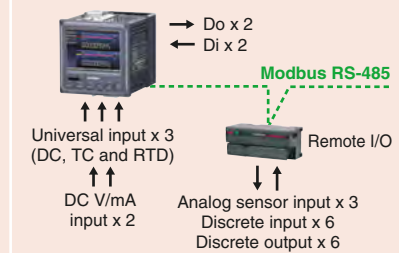

PROCESS & TEMPERATURE CONTROLLERS

SC100/SC200 Series Multi-Function PID Controller

- Two loops of PID control
- 2 x universal inputs, 4 x analog inputs, 5 x contact or pulse inputs, 1 x high speed pulse input
- DCS in instrument format: 2 PID blocks, 48 computation blocks and 12 sequential control blocks; Expansion model with doubled computation blocks are also available.
- Auto tuning function
- Ideal for replacing existing instruments
- High reliability for demanding process use — Built-in manual loader with enhanced security features
- Host communication via Modbus Ethernet TCP/IP or RS-485 RTU
- Peer-to-peer communication via NestBus to expand number of I/Os



CE
IP55

FUNCTION	MODEL
Basic version	SC100
Modbus/Nestbus extension	SC200 SC200W
Basic version with manual loader	SC110
Modbus/Nestbus extension with manual loader	SC210 SC210W
Pulse width output	SC200D

Highly Visible Color Graphic LCD Intuitive Touch Panel Operation

OPERATION VIEWS



ENGINEERING VIEWS



TC10 Series Temperature Controller

- Universal input configurable to T/C, RTD, DC current or voltage independently
- Discrete input for remote trigger
- Clamp-on current sensor input to detect wire breakdown or overload
- Modbus-RTU slave



TC10NM
• 1/8 DIN size
• One PID loop

CE
IP65



TC10EM
• 1/4 DIN size
• Two PID loops

CE
IP65

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

About Us & Locations

Extensive Functions with Convenient Web Browser Views: No Application Software is Required

Main Memory Capable of Storing Data for Over 10 Years

The DL30-G can save at the maximum of 128 points of analog/discrete signal data and events in its large main memory. Files are regularly copied to the SD card as backup.

Various arithmetic functions can be applied to I/O measurement values and the results are saved locally.

Data can be uploaded to a host device via FTP (or FTPS).




Event/Regular E-mail Attached with Report Files

Events such as data abnormalities or machine status (Run-Stop) can be notified by e-mails.

Regular data reporting is also possible.

Notification calendar can be customized to suppress mailing on holidays.

Preformatted spreadsheet report files can be attached to mails.

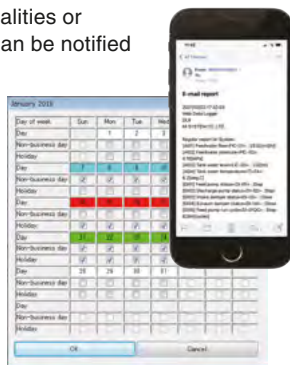


Web Server for Remote Monitoring

The DL30-G has a web server function equipped with various standard monitoring windows:

- Trend graph
- Data display
- Event log
- Spreadsheet report
- Download

Graphic windows can be created by describing HTML and JavaScript.

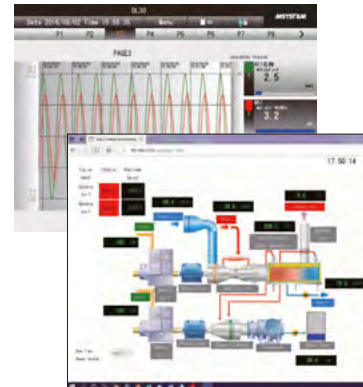

Extensive Communication Control

The DL30-G supports various network protocols including those as master/server station, enabling users to build a local stand-alone data logging and basic edge computing system without needing a host PC.

- HTTP/HTTPS server
- FTP/FTPS client and server
- Modbus/TCP master and slave
- SMTP client
- SNMP client (automatic time adjustment)
- SLMP master

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

About Us & Locations


GM30 Graphical Mailing Unit

Event Reporting by E-mails with Trend Graphs


The GM30 continuously monitors at the maximum of 32 input devices connected through Ethernet. If an event (abnormality) is detected at one or more input points, it generates trend graph and status graph files in PNG format, sends them to predesignated e-mail recipients.

Graphic images help the receivers grasp the event circumstances at a quick glance, and also can be easily shared by others.

Universal format files can be archived for future reference in picture albums readily available on PCs.

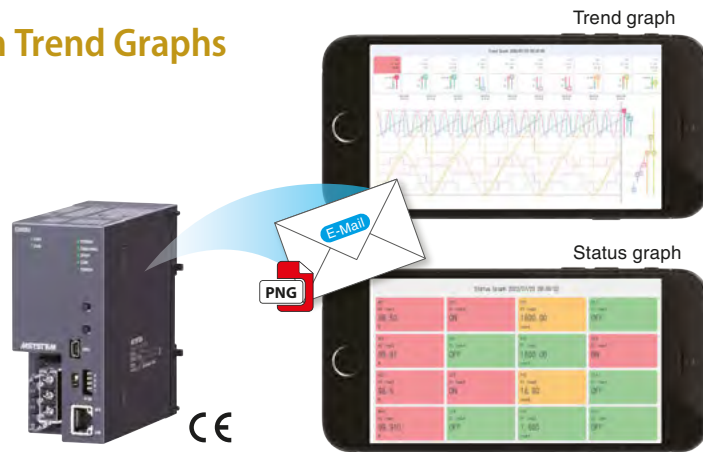

Facilities/Equipment, with No Direct External Connection, are Safe from Unauthorized Access through Internet

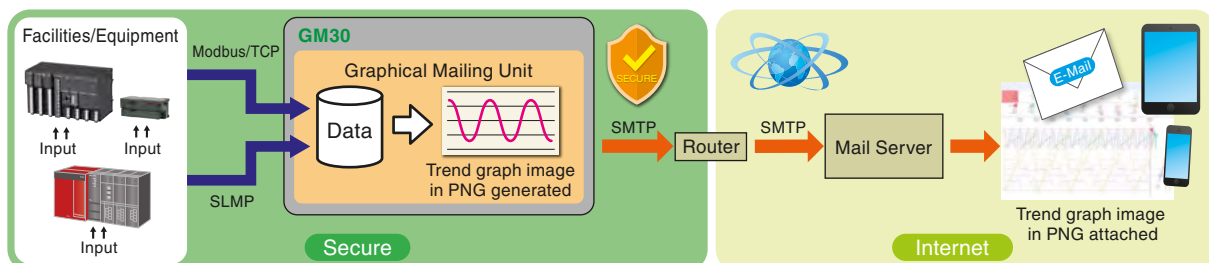


DL8 Series Web Enabled Remote Terminal Unit

Use Internet and Your Smartphone to Build Up Remote Monitoring System




- Simple remote monitoring via the internet without needing to build up a complex PC based system
- Pre-installed user-friendly browser views for remote data access through smartphones or tablets
- Event and regular reporting by e-mails
- Local data stored in an SD card memory
- Various network protocols are usable: TCP/IP, HTTP/HTTPS server, FTP/FTPS client and server, SMTP client, Modbus/TCP master and slave.
- R8 Series remote I/O modules available to accept a wide variety of field signals



Web Browser Views Designed for Mobiles

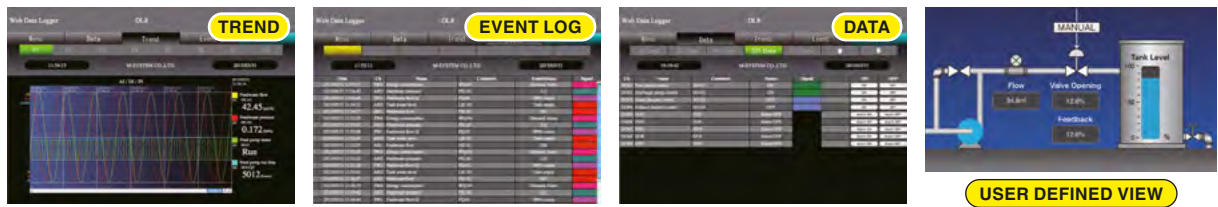

Enhanced Functions with Flexible Configurations

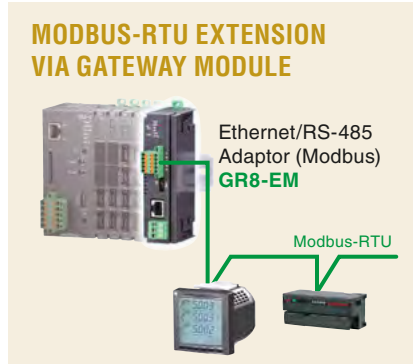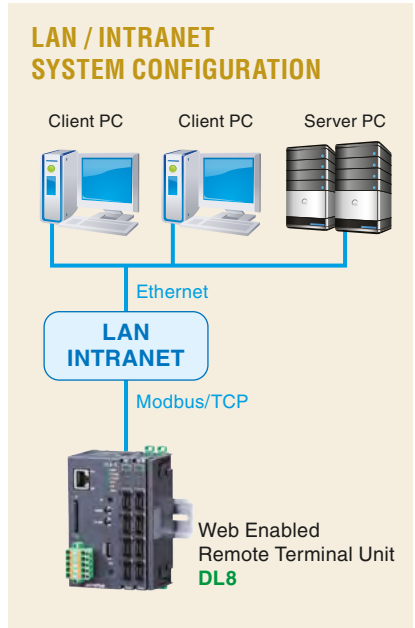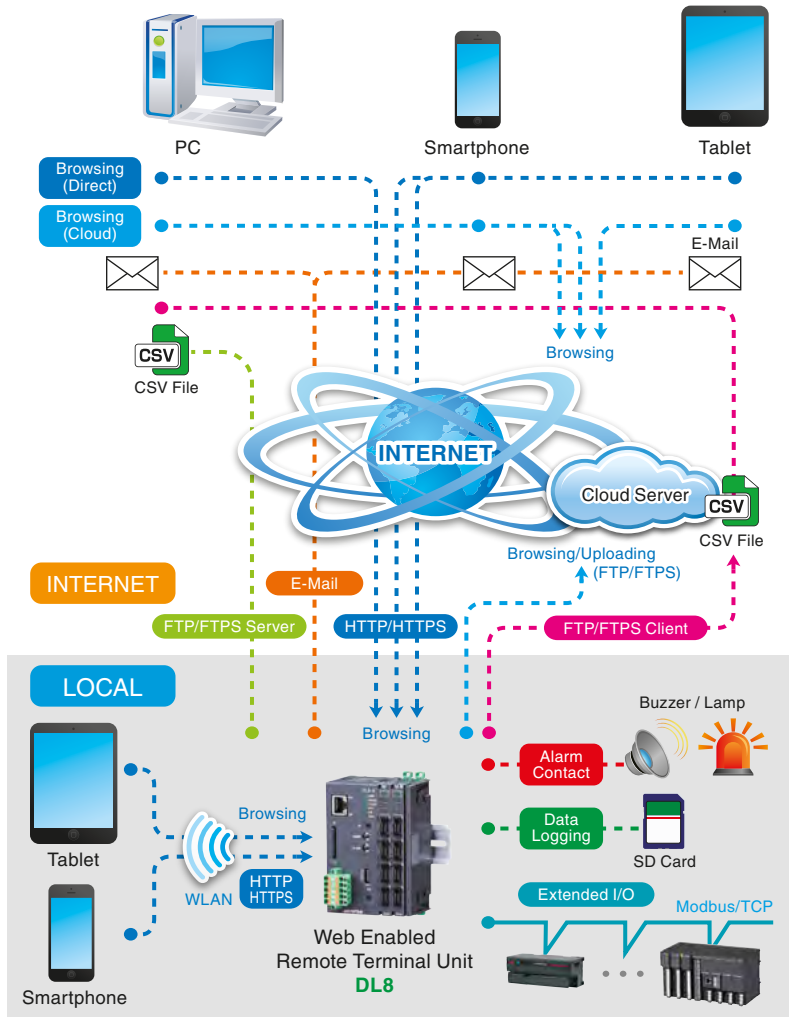

- Four-wire Signal Conditioners
- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights
- Remote I/O
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors

About Us & Locations

RGP30 Remote Graphic Panel

Easy Visualization of Manufacturing Plant Operations

The RGP30 is “a graphic panel without dedicated display” which enables users to freely choose a display device suitable for their applications.


It generates web browser screens showing various kind of data imported from PLCs, remote I/Os, IoT devices and CCTV cameras.

The dedicated graphic designing tool, RGP-Designer, is used to build display panel designs with multiple inline windows and original graphics using graphical parts from the component library.



- Four-wire Signal Conditioners
- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights
- Remote I/O
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors

Commercially Available Large Displays with Cost Performance Can be Connected through HDMI Port

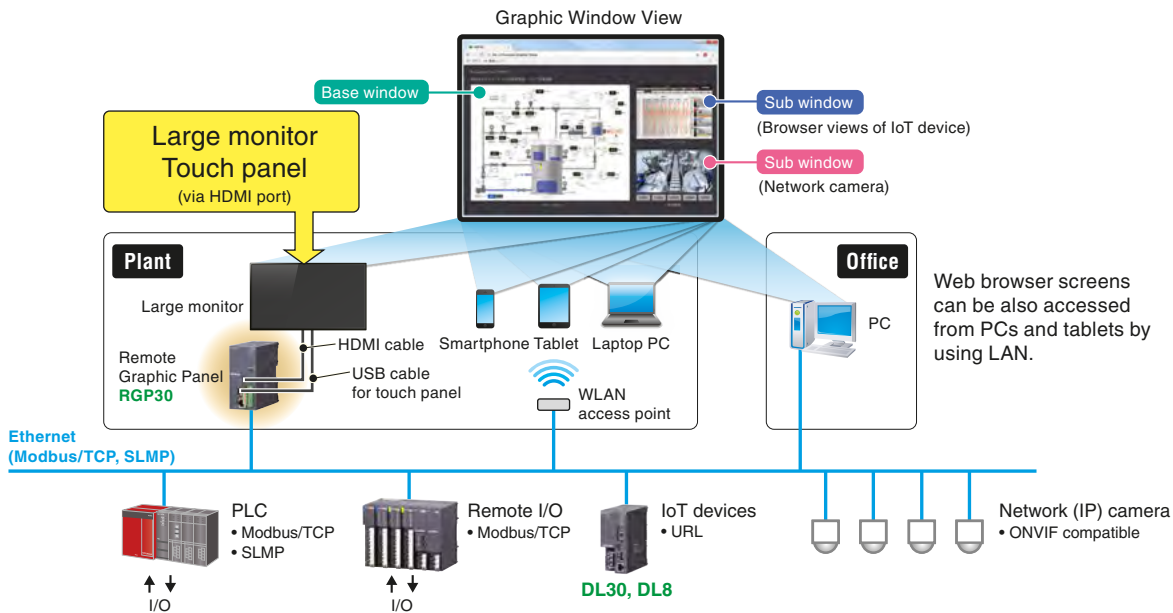


SG6 Security Gateway

Certification/Encryption Added to Modbus/TCP

Basic industrial protocols such as Modbus/TCP with no authentication or encryption system, need other means such as VPN (Virtual Private Network) to secure communications via the internet, which may be costly and over performance if it is employed only for Modbus/TCP.


A pair of SG6 placed at the gateway to the internet provide TLS (Transport Layer Security) to common but vulnerable Modbus/TCP, SLMP or HTTP.

Security of a currently running system can be easily upgraded by introducing the SG6.



- About Us & Locations


- Security by encrypted communication and cross certification
- Upgraded security for Modbus/TCP
- Authentication without using login ID/ password
- HTTP server can be operated as HTTPS server.
- Certificates can be generated by using LCA-SG Local Certification Authority Creator.

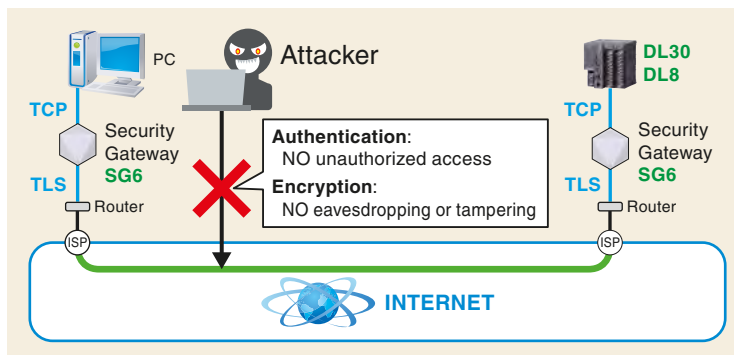

FINAL CONTROL COMPONENTS

Linear and Rotary Motion Electric Actuators for Valves and Machinery

- Four-wire Signal Conditioners
- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights
- Remote I/O
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors

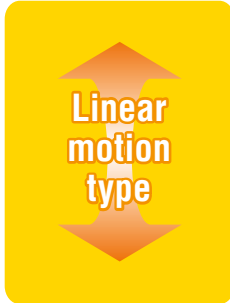

Open network interface
CC-Link DeviceNet

MSP4 CE UK CA
IP66

150 N ● 33.7 lbf **300 N** ● 67 lbf **500 N** ● 112 lbf **700 N** ● 157 lbf

600 N ● 135 lbf

Open network interface
CC-Link DeviceNet

MSP5 CE UK CA
IP66

150 N ● 33.7 lbf **300 N** ● 67 lbf **500 N** ● 112 lbf **700 N** ● 157 lbf

Open network interface
Modbus

MSP40 IP66



Auto-setup function

150 N ● 33.7 lbf **300 N** ● 67 lbf **700 N** ● 157 lbf

Open network interface
Modbus

MSP50 IP66

Auto-setup function

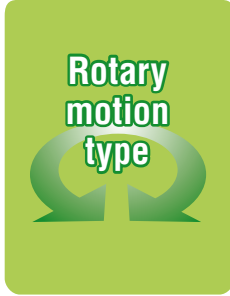

MRP4 IP66 CE UK CA

Open network interface
CC-Link DeviceNet

10 N·m ● 7.38 lbf-ft

MRP5 IP66 CE UK CA

Open network interface
CC-Link DeviceNet

MRP6 IP66 CE UK CA

Open network interface
CC-Link DeviceNet

5 N·m ● 3.69 lbf-ft

10 N·m ● 7.38 lbf-ft **16 N·m** ● 11.8 lbf-ft **24 N·m** ● 17.7 lbf-ft **33 N·m** ● 24.3 lbf-ft

MRP10 IP66 CE UK CA

Open network interface
Modbus

Terminal box with LED

6 N·m ● 4.43 lbf-ft **16 N·m** ● 11.8 lbf-ft **35 N·m** ● 25.8 lbf-ft

- Four-wire Signal Conditioners
- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights
- Remote I/O
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors

Open network interface
CC-Link
DeviceNet



MSP6
 CE UK CA
 IP66

1200 N ● 1800 N ● 2500 N ●
 270 lbf 405 lbf 562 lbf



PSN1
PSN1G
 CE
 IP66

PSN1G: 3000 N

1500 N ● 3000 N ●
 337 lbf 674 lbf



PSN3
 CE
 IP66

1500 N ● 3000 N ● 5000 N ●
 337 lbf 674 lbf 1124 lbf

Open network interface
Modbus
 Auto-setup function
 Terminal box with LED



MSP10
 CE UK CA
 IP66

1300 N

● 780 N ● 1200 N ● ● 1400 N ● 2300 N ● ● 2500 N ●
 175 N 270 lbf 292 lbf 315 lbf 517 lbf 562 lbf

1200 N 1800 N 2500 N 3000 N 5000 N
 270 lbf 405 lbf 562 lbf 674 lbf 1124 lbf

70 N·m
 51.6 lbf-ft

100 N·m
 73.8 lbf-ft

200 N·m
 148 lbf-ft

600 N·m
 443 lbf-ft

EAR70

Reversible AC motor type

IP66 CE

70 N·m ●
 51.6 lbf-ft



IP66 CE **PRP-0**



100 N·m ●
 73.8 lbf-ft

IP66 CE **PRP-1**



200 N·m ●
 148 lbf-ft

IP66 CE **PRP-2**



600 N·m ●
 443 lbf-ft

● 50 N·m
 36.9 lbf-ft

Conformance with CE/UKCA depends upon models. Please refer to the data sheets for details.

MSP / MRP Series Electric Actuator


MSP Series: Linear Motion

- Max. rated thrust: 2500 N (562 lbf)
- Max. stroke: 40 mm (1.57 in)

MRP Series: Rotary Motion

- Max. rated torque: 33 N·m (24.3 lbf·ft)
- Max. turn: 90°

- High resolution positioning for superior control
- Built-in feedback positioner and electric limiter
- Brushless stepping motor assures long life operation.
- Optional network interface with CC-Link, DeviceNet and Modbus

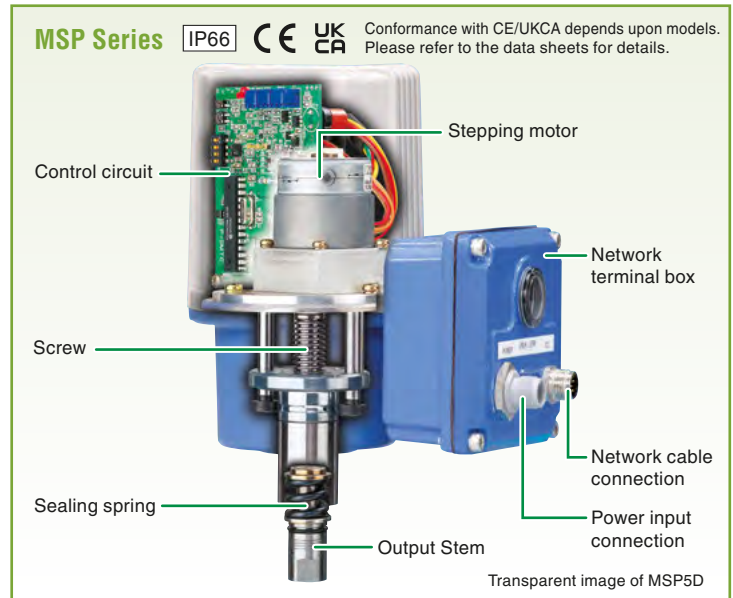


PSN / PRP Series Electric Actuator

PSN Series: Linear Motion

- Max. rated thrust: 5000 N (1124 lbf)
- Max. stroke: 60 mm (2.36 in)

- Brushless angle sensor eliminates problems with mechanical potentiometer feedback sensing
- Opening/closing speed, split range and failsafe position programmable by hand-held programmer
- Internal temperature sensor to control heater in cold climate and to prevent motor from overheating
- Forced-open/-closed contacts for remote or manual override

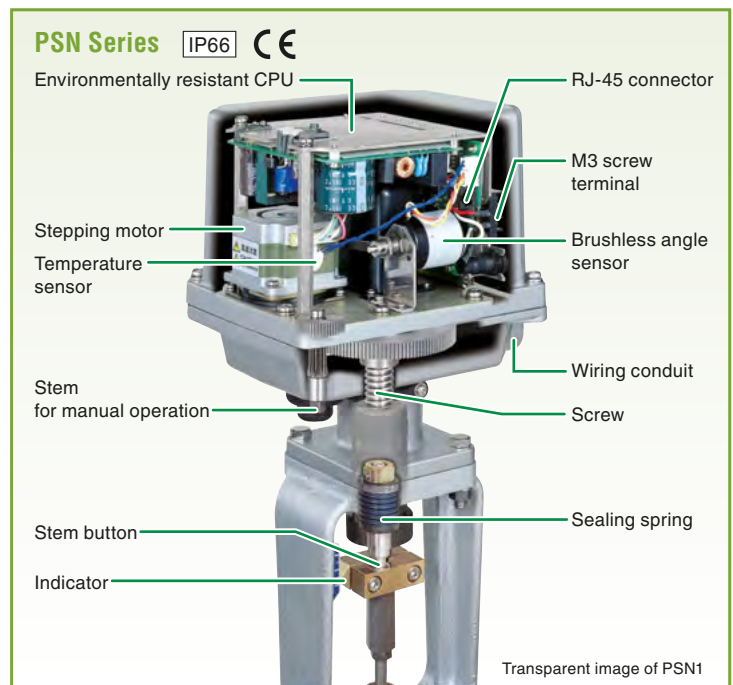

PRP-0, -1: Rotary Motion

- Max. rated torque: 200 N·m (148 lbf·ft)
- Max. turn: 90°



Lloyd's Register approved type available (ENV3)



IP66 CE

PRP-2: Rotary Motion

- Max. rated torque: 600 N·m (443 lbf·ft)
- Max. turn: 90°



IP66 CE

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components


Final Control Components

Lightning Surge Protectors




About Us & Locations

MSP10 Linear Motion Electric Actuator

- Max. rated thrust: 2500 N (562 lbf)
- Max. stroke: 40 mm (1.57 in)

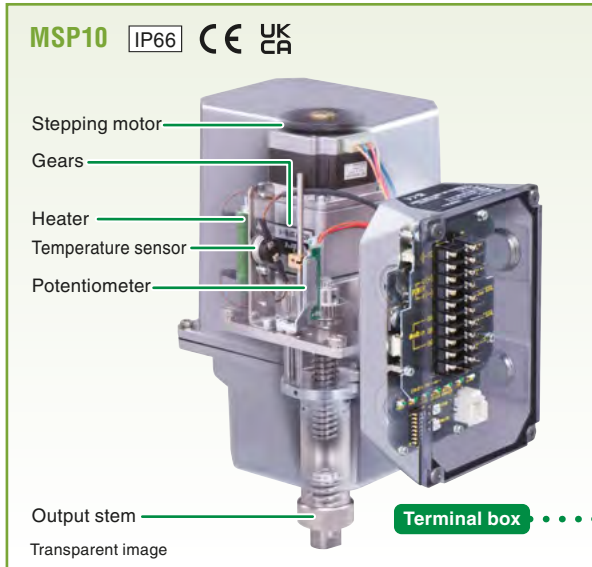

- ▮ Stepping motor drive
- ▮ High-speed operation control with 1/1000 resolution
- ▮ Auto-setup function makes the initial adjustment work simple and quick.
- ▮ 4-20 mA output plus Modbus-RTU communication for control and maintenance
- ▮ Thrust buffering by built-in coil spring at both ends of stroke
- ▮ Terminal box with transparent cover equipped with operating status indicator LEDs
- ▮ Operator access to the terminal box only

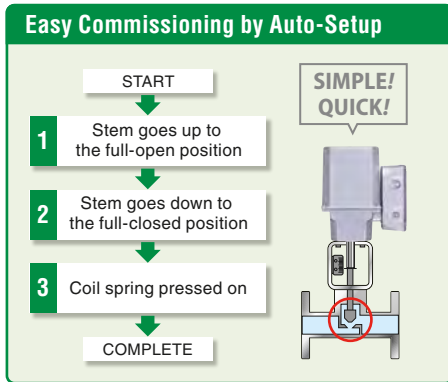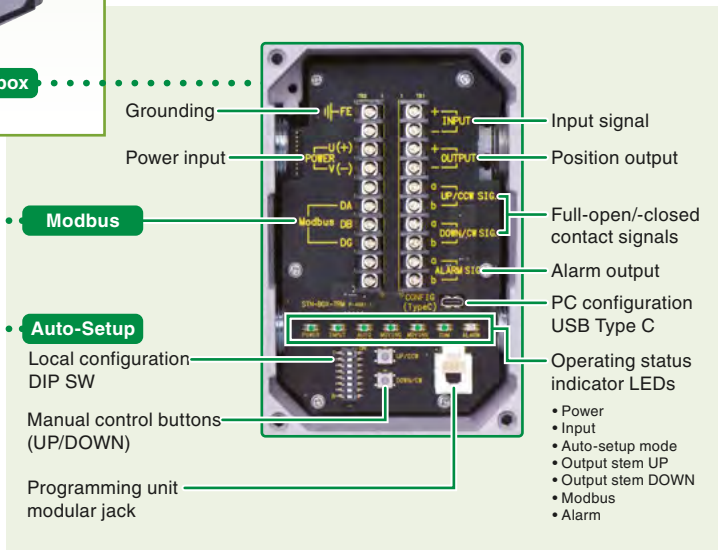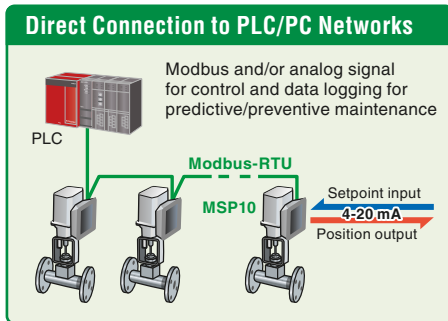

MRP10: Rotary Motion


- Max. rated torque: 50 N-m (36.9 lbf-ft)
- Max. turn: 90°



Two-wire Position Transmitters

VOS2T / VOS2T-R

- ▮ Detecting mechanical position of pneumatic and electric actuators to send a proportional 4-20 mA signal
- ▮ Linear motion type ($\pm 22.5^\circ$) or rotary motion type ($\pm 45^\circ$)
- ▮ Brushless design for long lasting reliability
- ▮ Lightweight & compact

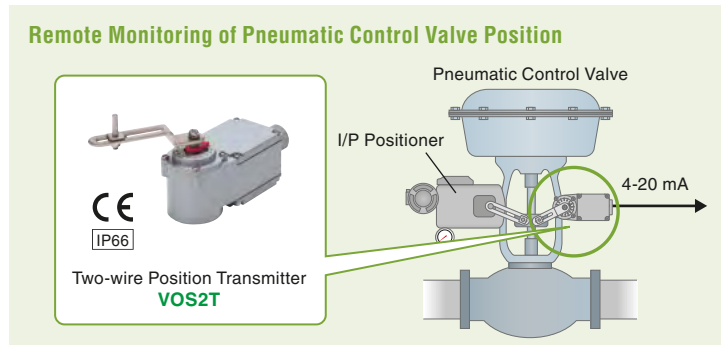

- Four-wire Signal Conditioners
- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights
- Remote I/O
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors

About Us & Locations


LIGHTNING SURGE PROTECTORS

- Four-wire Signal Conditioners
- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights
- Remote I/O
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors**


Ultra-slim Lightning Surge Protectors

MD7 Series

- High density mounting with 7 mm (0.28 in) wide modules
- Excellent protection by multi-stage SPD
- Max. discharge current 20 kA (8/20 μsec)
- Independent shield terminal (3 for signal, 1 for shield)
- Floating mode for the shield selectable to avoid ground loops
- Optional loop disconnect fuse for 4-20 mA signal line to separate the MD7 failed in shortcircuit mode, to protect other devices
- DIN rail mounting / grounding
- Conforms to IEC 61643-21, Categories C1, C2, D1

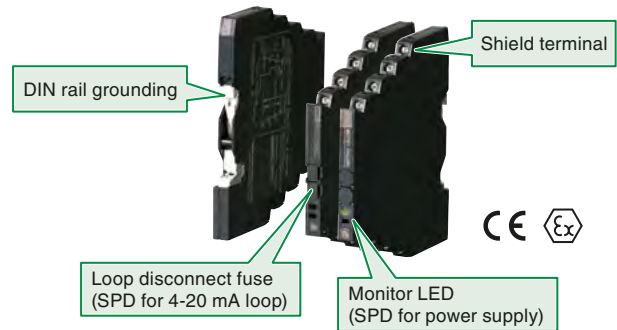

MD7 Series

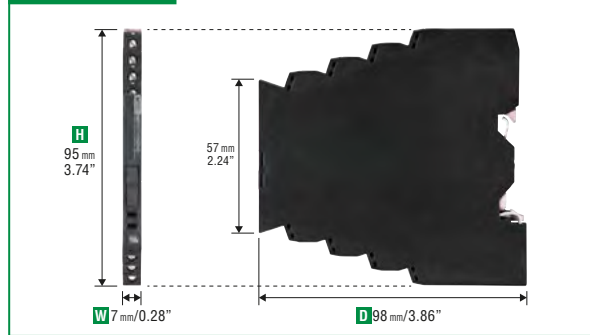


MDP Series

Plug-in Based Mounted

- Light-weight, easy-to-handle, plug-in construction
- Excellent protection by multi-stage SPD
- Head element can be removed and tested without disconnecting wires.
- Base socket connects input/output signals when the head element is removed.
- Wall or DIN rail mounting (with adapter A-33)



MD7 / MDP Series Selection Guide

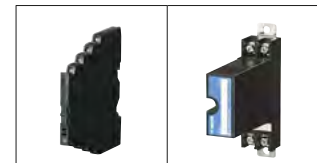

APPLICATION	MD7 SERIES	MDP SERIES
4-20 mA loop, pulse signal, 24 V	MD7ST-24	MDP-24-1
4-20 mA loop, life monitor	MD7AST	MDPA-24
2-wire transmitter loop, 1- or 2-channels	MD72W MD72WD	---
3-wire transmitter loop	MD72W	---
Thermocouple transmitter	MD7TC	MDP-TC
RTD transmitter	MD7RB	MDP-RB
Potentiometer & transmitter	MD7PM	MDP-PM
Strain gauge & transmitter	MD7LC	MDP-LC
Self-synch & transmitter	MD7JS	MDP-JS
Pulse sensor & transmitter	MD7PL	MDP-SP
DC power supply, 12/24 Vdc	MD7DP	MDP-D
AC power supply	MD7AP-100 MD7AP-200	MDP-100 MDP-200
RS-422 / RS-485	MD74R	MDP-4R
PROFIBUS-PA	MD7PA	MDP-PA
FOUNDATION Fieldbus	MD7FB	MDP-PA
LONWORKS (FTT-10A)	MD7LWA	MDP-LWA

Battery Powered Health Testing

MD7AST / MDPA-24


- Protects 4-20 mA & pulse signals
- Battery powered life monitoring function
- 'Check' button with indicators alerting panel inspectors of the surge protector's health



Field Transmitter Cable Conduit Mount

MD6N-24 / MD6T-24 / MD6P-24

- Protects 4-20 mA & pulse signals
- Directly mountable to the cable conduit of 2-wire transmitters and other field devices in an outdoor enclosure

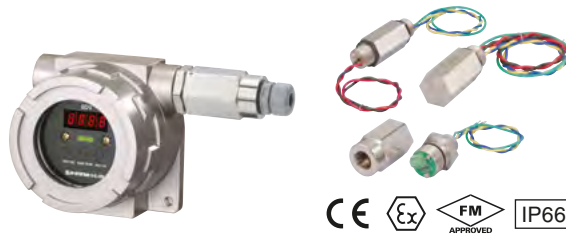

CC-Link IE Field Use

MDCAT-NC

- Approved and recommended by CLPA
- LAN cable shield wire can be floating or grounding by shortcircuit bar.



CC-Link Use

MDW5-CC

- Approved and recommended by CLPA
- CC-Link Ver.1.10 / 2.00



PoE Plus / 1000BASE-T Ethernet Use


MDCAT / MDCAT-A




- Power-over-Ethernet compatible
- 1000BASE-T / 100BASE-TX / 10BASE-T
- Ideal to protect network devices powered over Ethernet such as webcams
- LAN cable shield wire can be floating or grounding by shortcircuit bar.
- Conforms to IEC 61643-21, Categories C1, C2



Star Connection

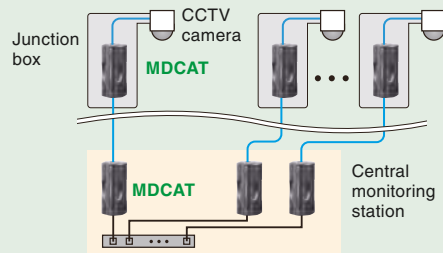

Cascade Connection

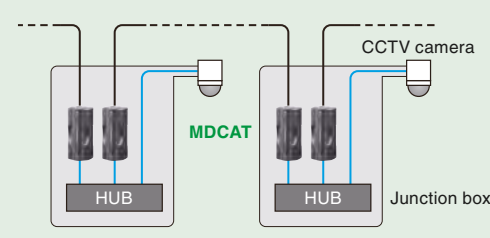

Life Monitor & Surge Counter

MAA-100 / MAA-200 / MAAC-100 / MAAC-200

- Protects AC power supply lines
- Life monitor function
- Alarm contact output to alert externally the surge protector's health



One-port SPD for Power Supply

MAKF / MAT2 / MAT3

- Thermal breaker ensures degraded heat element to be automatically separated from the power lines to prevent overheating.
- MAT2 / MAT3 applicable to three-phase power lines in single module



Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recording System

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

About Us & Locations

About Us

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O


Paperless Recording System

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

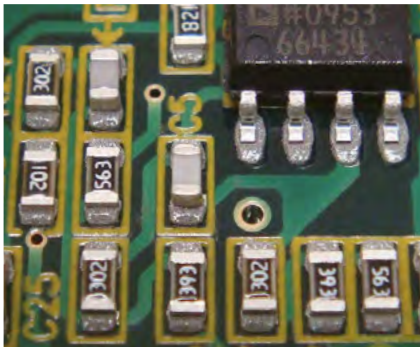

About Us & Locations

Customer First Service Policies

All products and services are provided outside Japan through our authorized distributors.

We are trying to enhance the customer satisfaction with the following five service policies.

As to the terms and conditions of a specific service, consult us for details.

1. Continued Products Availability

We have basic policy of never to discontinue our products without providing compatible replacements.

We always strive to procure all the electronic parts for our products. When a certain electronic part is no longer available, we will make best effort to provide a product compatibly replaceable with the existing product as long as there is substantial demand for such product.

2. Fast and Precise Delivery

The standard manufacturing lead time for most of our products is 5 days.

Quick Service Center is available for 24-48 hours shipment.

Once a delivery time is promised, the customer can of course count on us to deliver them precisely on time.

3. Special Specifications Service with no extra charge

Special specification products can be supplied without additional charge for major product series, except for those requiring excessive labor or materials.

We are putting our effort into expansion of the scope of Special Specifications Service to all of our products. Special Specification Service will be available to more product series in the future.

For detailed terms and conditions applicable to each specific product, consult us.

4. Special Repair Service

During the service period of 36 months from the date of purchase, we will provide free repair service for a damage or malfunction caused by a user's mistake when we determine at our discretion that cause of the damage or malfunction falls into the "Service Coverage" set out as conditions of this service. Such free repair service will be limited to one repair per cause of the damage or malfunction.

For detailed terms and conditions applicable to each specific product, consult us.

5. Factory Setting Service with no extra charge

Configuration setting for programmable products is free of charge upon the customer's request for once when ordering, except for those requiring special engineering (e.g. multi-function PID controllers).

For detailed terms and conditions applicable to each specific product, consult us.

Locations

JAPAN

Osaka Main Factory

Kansai Branch Office (Osaka)

Sendai Sales Office

Kanto Branch Office (Tokyo)

Chubu Branch Office (Nagoya)

VEMS (Mie Factory)

Kyushu Sales Office

Kyoto Techno Center

Kyoto Research Center & Factory

- Four-wire Signal Conditioners
- Two-wire Signal Conditioners
- Power Monitoring Components
- Indicators & Tower Lights
- Remote I/O
- Paperless Recording System
- Process & Temperature Controllers
- IoT Components
- Final Control Components
- Lightning Surge Protectors

Kyoto Techno Center

Type testing and evaluation facilities

- VCCI (Japan) registered anechoic chamber
- 6 m² shielded room capable of conducting multiple tests at once

Kyoto Research Center & Factory

- Second manufacturing location inspired by BCP revised after the Great East Japan Earthquake in 2011
- Showcase plant utilizing M-System's BA controllers

About Us & Locations

GLOBAL SALES NETWORK

Europe

- Belgium
- France
- Greece
- Hungary
- Italy
- The Netherlands
- Norway
- Poland
- Portugal
- Spain
- Sweden
- Switzerland
- UK

West Asia

- Kuwait
- Turkey
- UAE

South Africa

South & South-East Asia

- India
- Indonesia
- Malaysia
- Pakistan
- Philippines
- Singapore
- Thailand
- Vietnam

Oceania

- Australia
- New Zealand

MG Korea Co., Ltd.

Japan Headquarters

M-System China Co., Ltd. (Shanghai, Guangzhou)

Taiwan

Canada

USA

Mexico

South America

- Argentina
- Brazil
- Chile
- Columbia
- El Salvador
- Peru
- Uruguay
- Venezuela

Find Complete Product Information on Our Global English Website.

Services & Support

You can access all downloadable materials including setup tools (software), drivers and device profiles, catalogs and videos.

Demo Site

Browse trend and data monitor windows of data logging systems using DL30, DL8 and other products.

Video Library

Videos on the products and the company, educational materials, virtual exhibition can be viewed on YouTube.

Specifications & Manuals

Enter either a product model number or a keyword to search for data sheets, instruction manuals and other related documents.

Compare specifications to find exactly what you need. You can narrow your search by product categories.

Product Category Index

Go directly to a product category to find more about products introduced in this catalog and even more selections.

Application Examples

Find products suitable for your application fields.



Regional Language Websites

Product information including data sheets, instruction manuals and videos is available in multiple languages.

日本語

ENGLISH

中文(简体)

한국어



Japanese



Chinese (Simplified Chinese)



Korean

MSYSTEM
M-SYSTEM CO., LTD.

E-mail
info@m-system.co.jp



Website



Request Info

Your local representative: