

## Tension-Clamp Ultra-Slim Signal Conditioners M6S Series


### PULSE ISOLATOR

#### Functions & Features

- Maintenance-free tension clamp connection
- 5.9-mm wide ultra-slim design
- Low profile allows the M6S module mounted in a 120-mm deep panel
- Galvanically isolates pulse rate signals
- High-density mounting
- Power indicator and input monitor LED

#### Typical Applications

- Isolating field pulse signals in order to reduce noises
- Changing e.g. dry contact signal to e.g. 5 V signals

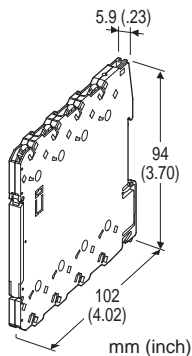

### MODEL: M6SPP-[1][2][3]-R

#### ORDERING INFORMATION

- Code number: M6SPP-[1][2][3]-R
- Specify a code from below for each [1] through [3].  
(e.g. M6SPP-CMN-R)

#### [1] INPUT

- A1:** Open collector
- A2:** Mechanical contact
- C:** 5 V pulse (sensitivity 2 V)
- D:** 12 V/24 V pulse (sensitivity 5 V)
- H:** Two-wire current pulse

#### [2] OUTPUT

- A1:** High frequency open collector (max. 100 kHz)
- A2:** Low frequency open collector (max. 30 Hz)
- M:** 5 V pulse
- N:** 12 V pulse
- P:** 24 V pulse

#### [3] OUTPUT LOGIC

- N:** The same as the input
- R:** Inverted

#### POWER INPUT

- DC Power**
- R:** 24 V DC  
(Operational voltage range 24 V  $\pm$ 10 %, ripple 10 %p-p max.)

#### GENERAL SPECIFICATIONS

##### Connection

- Input and output:** Tension clamp
- Power input:** Via the Installation Base (model: M6SBS) or Tension clamp
- Applicable wire size:** 0.2 to 2.5 mm<sup>2</sup>, stripped length 8 mm
- Housing material:** Flame-resistant resin (black)
- Isolation:** Input to output to power
- Chattering protection:** Filter provided for mechanical contact input
- Power LED:** Green light turns on when the power is supplied.
- Input monitor LED**
- Open collector, Mechanical contact:** Orange LED turns on when the input is ON.
- Voltage pulse, 2-wire current pulse:** Orange LED turns on when the input is high.
- Input pulse sensing:** DC coupled

#### INPUT SPECIFICATIONS

- Excitation:** 12 V DC @20 mA, shortcircuit protection
- **Open Collector**
- Maximum frequency:** 100 kHz
- Pulse width time requirement:**  $\geq$  5  $\mu$ sec. for ON and OFF
- Sensing:** Approx. 11 V DC @2.4 mA
- Detecting levels:**  $\leq$  1.8 k $\Omega$ /3 V for ON,  $\geq$  4 k $\Omega$ /5 V for OFF
- **Mechanical Contact**
- Maximum frequency:** 30 Hz
- Pulse width time requirement:**  $\geq$  10 msec. for ON and OFF
- Sensing:** Approx. 11 V DC @2.4 mA
- Detecting levels:**  $\leq$  1.8 k $\Omega$ /3 V for ON,  $\geq$  4 k $\Omega$ /5 V for OFF
- **Voltage Pulse**
- Maximum frequency:** 100 kHz
- Pulse width time requirement:**  $\geq$  5  $\mu$ sec. for high and low levels
- Waveform:** Square or sine
- Input impedance:**  $\geq$  10 k $\Omega$
- Max. voltage between input terminals:** 50 V
- Detecting H level**
- 5 V pulse:  $\geq$  3 V
- 12 V, 24 V pulse:  $\geq$  6 V
- Detecting L level**
- 5 V pulse:  $\leq$  1 V

12 V, 24 V pulse:  $\leq 4$  V

• **Two-Wire Current Pulse**

**Max. frequency:** 100 kHz

**Input resistance:** Receiving resistor 200  $\Omega$

**Input range:** 0 – 25 mA

**Detecting levels:**  $\leq 5$  mA for Lo,  $\geq 15$  mA for Hi

## OUTPUT SPECIFICATIONS

• **High Frequency Open Collector:**

50 V DC @100 mA (resistive load)

**Maximum frequency:** 100 kHz

**Saturation voltage:** 0.5 V DC

• **Low Frequency Open Collector:**

50 V DC @100 mA (resistive load)

**Maximum frequency:** 30 Hz

**Timer:** Limits within 75  $\pm$ 25 msec.

ON time for output logic non-inverted

OFF time for output logic inverted

**Saturation voltage:** 0.5 V DC

• **Voltage Pulse**

**Maximum frequency:** 100 kHz

**High level:** Rating (5, 12 or 24 V)  $\pm$ 10 %

**Low level:**  $\leq 0.5$  V

**Load resistance:**

$\geq 1.0$  k $\Omega$  for 5 V

$\geq 2.4$  k $\Omega$  for 12 V

$\geq 4.8$  k $\Omega$  for 24 V

## INSTALLATION

**Power consumption:** Approx. 1 W

**Operating temperature:** -20 to +55°C (-4 to +131°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Mounting:** Installation Base (model: M6SBS) or DIN rail

**Weight:** 60 g (2.1 oz)

## PERFORMANCE

**Insulation resistance:**  $\geq 100$  M $\Omega$  with 500 V DC

**Dielectric strength:** 2000 V AC @1 minute (input to output to power to ground)

## STANDARDS & APPROVALS

**CE conformity:**


EMC Directive (2004/108/EC)

EN 61000-6-4 (EMI)

EN 61000-6-2 (EMS)

## EXTERNAL VIEW


(With the cover open)

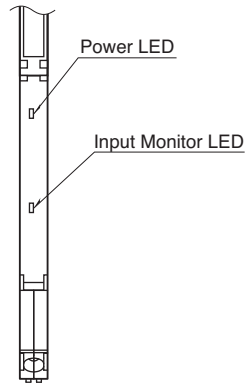

## OUTPUT LOGIC

INPUT TYPE	PULSE LOGIC	INPUT	VOLTAGE PULSE OUTPUT	OPEN COLLECTOR
Voltage Pulse Input 2-wire Current Pulse	Non Inverted	H L	H L	OFF ON
	Inverted	H L	H L	OFF ON
Mechanical Contact Open Collector	Non Inverted	OFF ON	H L	OFF ON
	Inverted	OFF ON	H L	OFF ON


## DIMENSIONS unit: mm (inch)

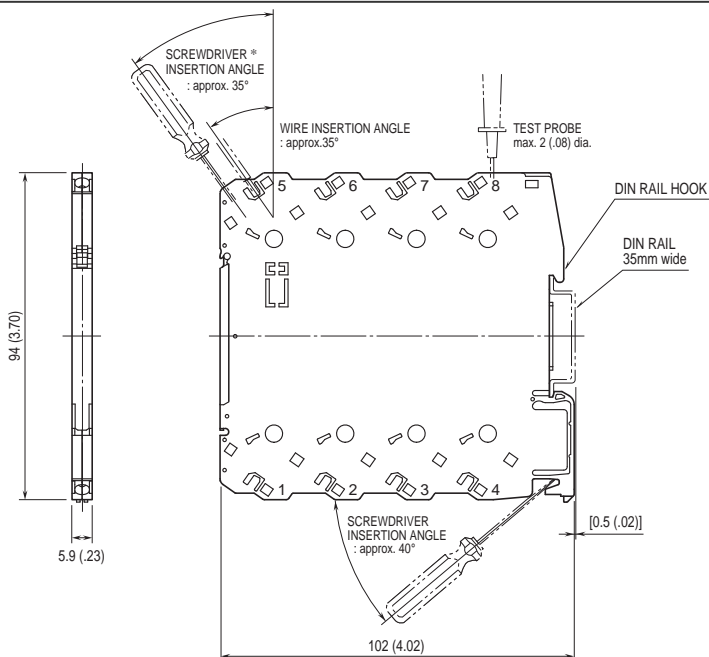

• When mounting, no extra space is needed between units.

\*Use a minus screwdriver: tip width 3.8 mm max., tip thickness 0.5 to 0.6 mm


## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

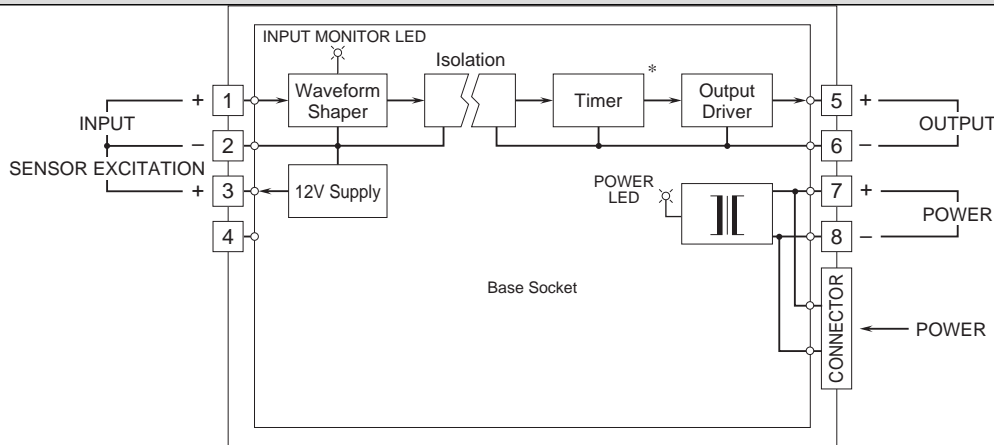


\*Low freq. open collector output only.

### Input Connection Examples

#### ■ Mechanical Contact or Open Collector

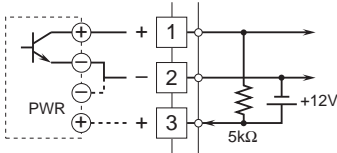


#### ■ Voltage Pulse

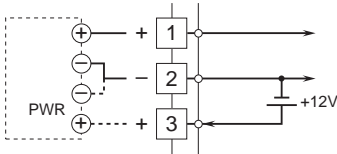


### ■ 2-Wire Current Pulse

#### • Built-in Excitation

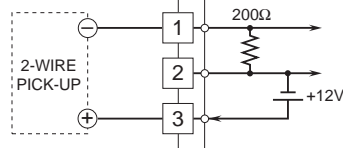


#### • External DC Supply

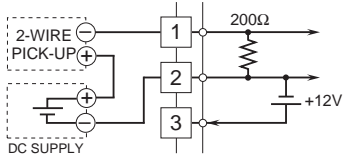


### Output Connection Examples

#### ■ Open Collector

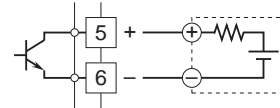

#### ■ Voltage Pulse

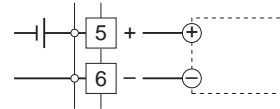

Specifications are subject to change without notice.