


Lightning Surge Protectors for Electronics Equipment M-RESTER

LIGHTNING SURGE PROTECTOR FOR RTD USE (ultra-slim)

Functions & Features

- High discharge current capacity 20 kA (8 / 20 μ s), 1 kA (10 / 350 μ s)
- Ultra-thin 7-mm-wide module can be mounted in high density
- Excellent protection employing multi-stage SPD circuits
- DIN rail mounting and grounding
- Shield terminal provided
- Does not affect instrumentation signal when combined with a 3-wire RTD, thanks to the internal high accuracy series resistors
- CE marking



GENERAL SPECIFICATIONS

- Construction:** Slim-sized front terminal structure
- Degree of protection:** IP20
- Connection:** Euro terminal block (torque 0.3 N·m)
- Applicable wire size:** 0.2 – 2.5 mm²
- Grounding:** DIN Rail
- Housing material:** Flame-resistant resin (black)

INSTALLATION

- Operating temperature:** -25 to +85°C (-13 to +185°F)
(See Safety Parameters for use in a hazardous location.)
- Operating humidity:** 30 to 90 %RH (non-condensing)
- Mounting:** DIN Rail (TH35-7.5, 1-mm-thick)
Oxide film on the surface of an aluminium rail may lower the electric conductivity between this module and the ground. Use a steel or copper rail.
- Weight:** 70 g (2.5 oz)

MODEL: MD7RB-[1][2]

ORDERING INFORMATION

- Code number: MD7RB-[1][2]
Specify a code from below for each [1] and [2].
(e.g. MD7RB-FF0)
For the safety approval code 2, specify the product's destination country using Ordering Information Sheet (No. ESU-8057).

[1] SHIELD TERMINAL (line / earth)

- FF: Floating / Floating
- FG: Floating / Grounding
- GF: Grounding / Floating
- GG: Grounding / Grounding

[2] SAFETY APPROVAL

- 0: None
- 2: CENELEC intrinsic safety (ATEX)

PERFORMANCE

MODEL NO.		MD7RB-FF	MD7RB-FG	MD7RB-GF	MD7RB-GG
Max. continuous operating voltage (Uc)	Line to Line	±3V			
	Line to Earth	±160V			±7.5V
	Line to SHLD	±160V		±7.5V	
	SHLD to Earth	±160V	short	±160V	short
Voltage protection level (Up) @4kV (1.2 / 50 μs)	Line to Line	±25V			
	Line to Earth	±800V			±25V
	Line to SHLD	±1200V	±800V	±25V	
	SHLD to Earth	±800V	short	±800V	short
Leakage current @Uc	Line to Line	≤5μA			
	Other sections	≤5μA			
Response time	Line to Line	≤4 nsec.			
	Other sections	≤20 nsec.			
discharge current (Imax)		20kA (8 / 20 μs), 1.0kA (10 / 350 μs)			
Nominal current (In)		100mA			
Internal series resistance		5.12Ω ±0.3%, ±30 ppm/°C per line			

STANDARDS & APPROVALS

CE conformity:

ATEX Directive (94/9/EC)
 Ex ia EN 60079-11: 2007
 Category 1G EN 60079-26: 2007

EMC Directive (2004/108/EC)

EMI EN 61000-6-4: 2007
 EMS EN 61000-6-2: 2005

Safety approval:

CENELEC: Intrinsic safety (ATEX)

⊕ II 1G, Ex ia IIC; T4 and T5
 EN 60079-0: 2006
 EN 60079-11: 2007
 EN 60079-26: 2007

Surge protection: IEC 61643-21: 2000

(Categories C1, C2, D1)

SAFETY PARAMETERS


■ CENELEC / ATEX IS DATA

Ui (Vmax)	7V		
Ii (Imax)	any		
Ci	50 nF		
Li	0 μH		
Pi	Temp. Class	Range	Parameter
	T4	-25 to +40°C	1.3W
		-25 to +60°C	1.2W
		-25 to +80°C	1.0W
T5	-25 to +40°C	1.0W	


DESCRIPTIONS

■ SELECTING SHIELD TERMINAL TYPE

- The surge protector has a dedicated shield terminal effective for easy shield wiring and surge protection.
- Review the shield method (grounding, non-grounding, connecting to SG, etc.) required by the protected device or system.
- There is no electrical effect to the shield by installing the surge protector, but an appropriate shield terminal type must be selected to suit user applications.
- Refer to the flow chart below to choose.

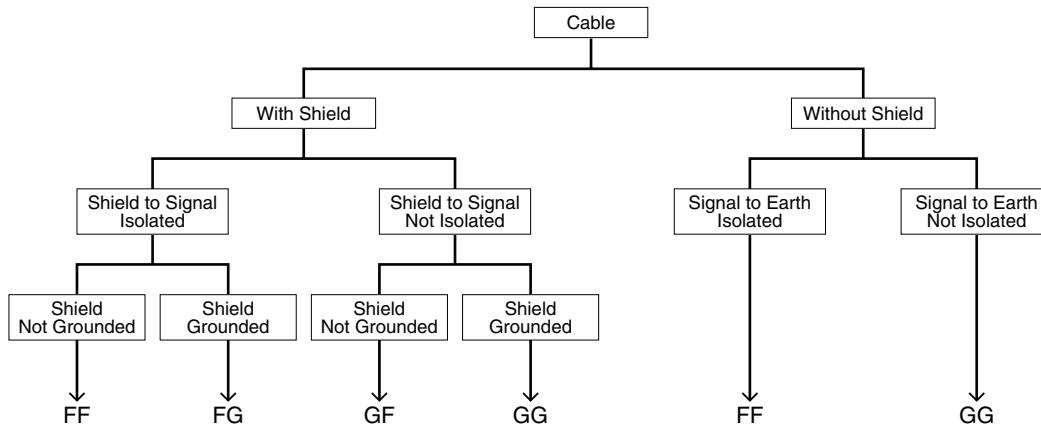


CONNECTION EXAMPLES

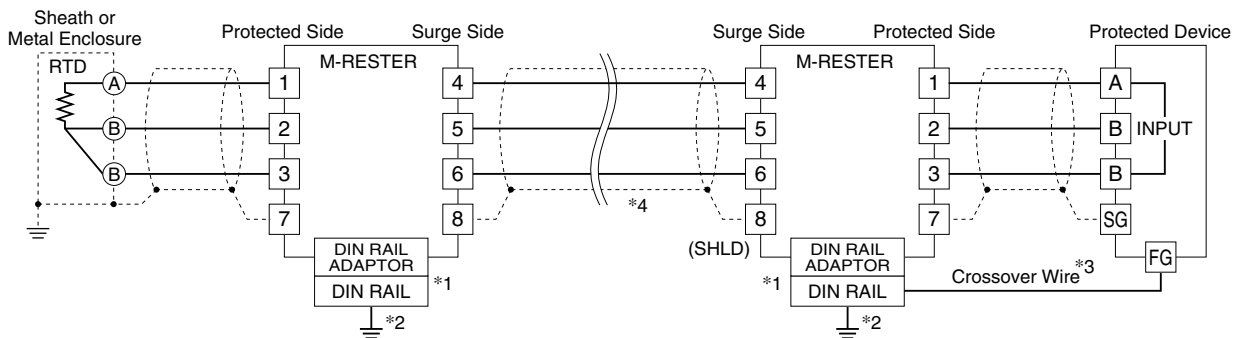

- *1. Oxide film on the surface of an aluminium rail may lower the electric conductivity between this module and the ground. Use a steel or copper rail.
- *2. Be sure to ground the DIN rail. Recommended grounding resistance $\leq 100\Omega$
- *3. Cross-wire between the DIN rail and the metal housing of the protected device to equalize the earth potential. Ground only the surge protector when the protected device has no ground terminal.
- *4. Shield wiring method is an example. Proceed according to the system requirements.

EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)

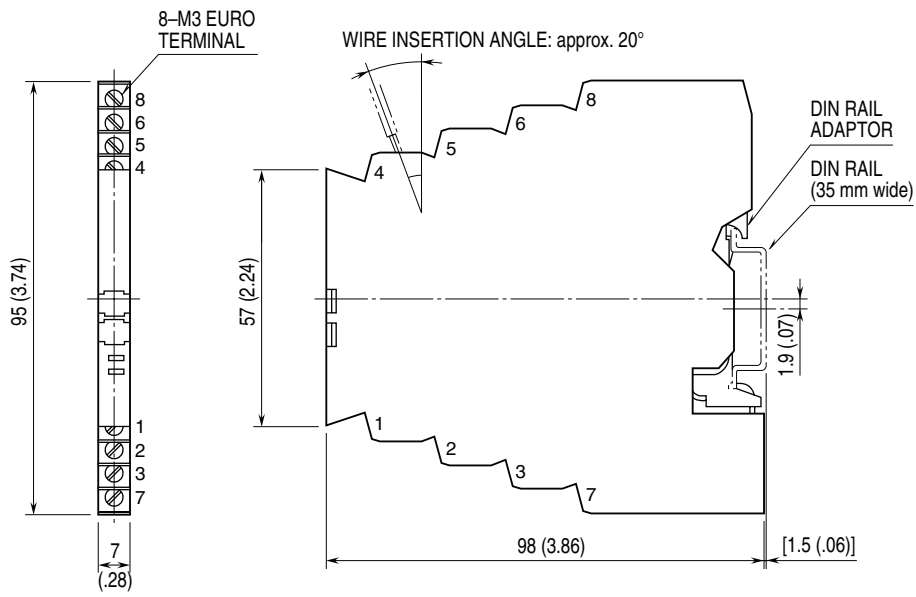

SCHEMATIC CIRCUITRY

SHIELD TERMINAL	MODEL NO.	SCHEMATIC CIRCUITRY	APPLICATIONS
<ul style="list-style-type: none"> Line to SHLD: Floating Earth to SHLD: Floating 	<ul style="list-style-type: none"> MD7RB-FFx 		<ul style="list-style-type: none"> Standard type To protect a device having isolation between Signal and Earth. When SHLD should be floating against the earth. (single-end grounding)
<ul style="list-style-type: none"> Line to SHLD: Floating Earth to SHLD: Grounding 	<ul style="list-style-type: none"> MD7RB-FGx 		<ul style="list-style-type: none"> To protect a device having isolation between Signal and Earth. When SHLD should be grounded. (single- or both-end grounding)
<ul style="list-style-type: none"> Line to SHLD: Grounding Earth to SHLD: Floating 	<ul style="list-style-type: none"> MD7RB-GFx 		<ul style="list-style-type: none"> To protect a device having isolation between Signal and Earth. When SHLD wire should be connected to SG terminal of the protected device. (SHLD is not grounded to the earth.)
<ul style="list-style-type: none"> Line to SHLD: Grounding Earth to SHLD: Grounding 	<ul style="list-style-type: none"> MD7RB-GGx 		<ul style="list-style-type: none"> To protect a device which does not have a good dielectric strength between Signal and Earth.

Sections enclosed with broken line may differ depending upon the models.



Specifications are subject to change without notice.