


DC POWER SUPPLY

(maintenance forecast monitor function)

Functions & Features

- Accepts 100 - 240 V AC and provides regulated 24 V DC output
- Maintenance forecast monitor function

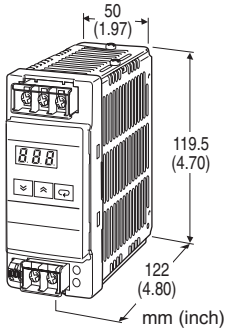

MODEL:MDC6-12024A-M2

ORDERING INFORMATION

- Code number: MDC6-12024A-M2

CAPACITY

120: 120 W

OUTPUT VOLTAGE

24: 24 V DC

MONITOR

A: Maintenance forecast monitor function

POWER INPUT

AC Power

M2: 100 - 240 V AC

GENERAL SPECIFICATIONS

Construction: Front terminal access; terminal cover provided

Connection: M4 screw terminals (torque 1.08 N·m)

Screw terminal: Nickel-plated steel

Housing material: Flame-resistant resin (beige); aluminium

SUPPLY OUTPUT

Output voltage: 24 V DC -10/+15 %; adjustable on the front (ripple 2.0 %p-p max.)

Load current: ≤ 5 A

Overload protection: Voltage drop characteristics (105 %)

Overload detecting: 105 % of the rated current

■ ALARM OUTPUT

Transistor: NPN (sink) type; 30 V DC max., 50 mA DC max.

Residual voltage at ON: ≤ 2 V

Leakage current at OFF: ≤ 0.1 mA

INSTALLATION

Power input

AC: Operational voltage range 85 - 264 V AC 50/60 Hz

Operating temperature: 0 to 50°C (32 to 122°F)

Operating humidity: 25 to 85 % RH (non-condensing)

Mounting: DIN rail

Weight: 550 g (1.21 lbs)

PERFORMANCE

Temp. coefficient: ±0.05 %/°C (±0.03 %/°F)

Load effect: ≤ 1.5 %

Line voltage effect: ±0.5 % over voltage range

Insulation resistance: ≥ 100 MΩ with 500 V DC

Dielectric strength: 3000 V AC @ 1 minute

(output to power input)

2000 V AC @ 1 minute (power input to ground)

1000 V AC @ 1 minute (output to ground)

STANDARDS & APPROVALS

CE conformity:

EMC Directive (2004/108/EC)

EN 61204-3: 2000 (Class A)

Low Voltage Directive (2006/95/EC)

EN 50178: 1997

EN 60950-1: 2006 + A11: 2009

Approval:

UL 508 (Class 2: per UL 1310)


CAN/CSA C22.2 No.14

UL 60950-1 (Class 2)


CAN/CSA C22.2 No.60950-1

VDE1060 VDE0805-1+A11


EXTERNAL VIEW

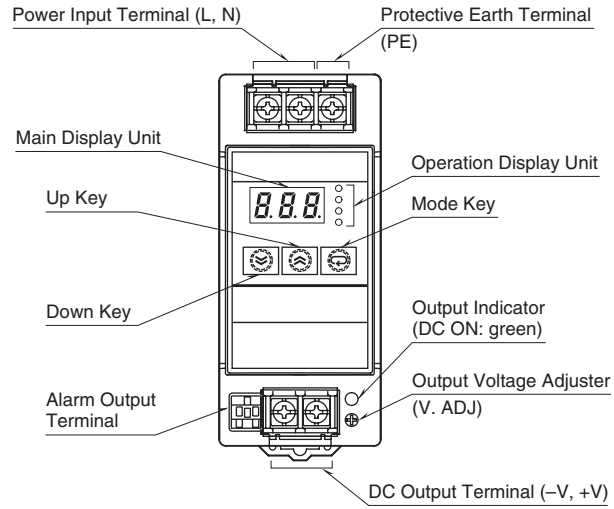

DIMENSIONS unit: mm (inch)

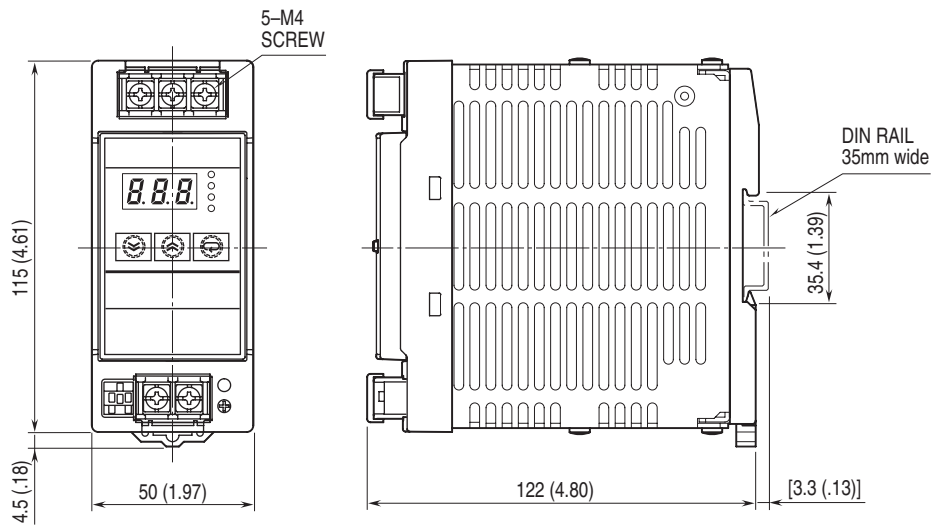


MOUNTING REQUIREMENTS unit: mm (inch)

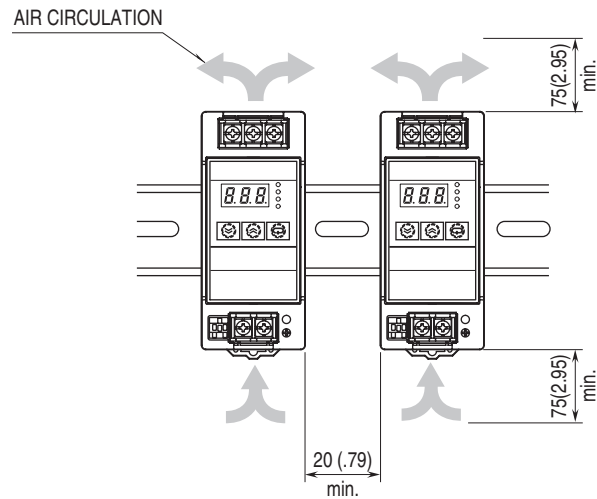

Heat dissipation is important to ensure the power supply's long-term reliability. The power supply is designed to radiate heat by means of natural air flow. Install the power supply so that the air flow circulates around it.

CONNECTION DIAGRAM

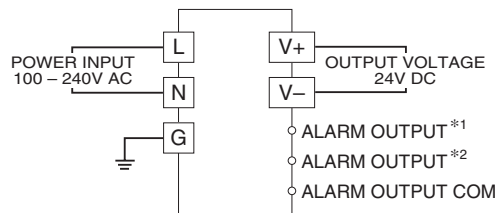

*1. Undervoltage alarm output terminal (DC LOW)
*2. Maintenance forecast monitor terminal (Yrs)



Specifications are subject to change without notice.