

## Super-mini Signal Conditioners Mini-M Series


### DC ALARM

#### Functions & Features

- Provides N.O. relay outputs at preset DC input levels
- Dual trip
- Multi-turn potentiometer adj.
- Monitor jacks help setpoint adj.
- Power ON timer
- Relays can be powered 110 V DC

#### Typical Applications

- Annunciator
- Various alarm applications

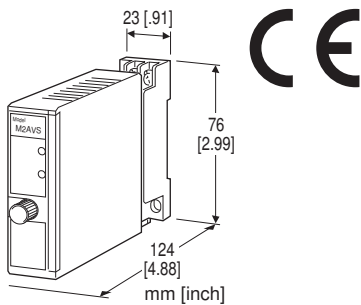

## MODEL: M2AVS-[1][2][3][4]-[5][6]

### ORDERING INFORMATION

- Code number: M2AVS-[1][2][3][4]-[5][6]
- Specify a code from below for each of [1] through [6].  
(e.g. M2AVS-6112-R/CE/Q)
- Special input range (For codes Z, 0 & 01)
- Specify the specification for option code /Q  
(e.g. /C01/S01)

### [1] INPUT

#### Current

- A: 4 - 20 mA DC (Input resistance 250 Ω)
- A1: 4 - 20 mA DC (Input resistance 50 Ω)
- B: 2 - 10 mA DC (Input resistance 500 Ω)
- C: 1 - 5 mA DC (Input resistance 1000 Ω)
- D: 0 - 20 mA DC (Input resistance 50 Ω)
- E: 0 - 16 mA DC (Input resistance 62.5 Ω)
- F: 0 - 10 mA DC (Input resistance 100 Ω)
- G: 0 - 1 mA DC (Input resistance 1000 Ω)
- H: 10 - 50 mA DC (Input resistance 100 Ω)
- J: 0 - 10 μA DC (Input resistance 1000 Ω)
- K: 0 - 100 μA DC (Input resistance 1000 Ω)
- GW: -1 - +1 mA DC (Input resistance 1000 Ω)
- FW: -10 - +10 mA DC (Input resistance 100 Ω)

Z: Specify current (See INPUT SPECIFICATIONS)

#### Voltage

- 1: 0 - 10 mV DC (Input resistance 10 kΩ min.)
- 15: 0 - 50 mV DC (Input resistance 10 kΩ min.)
- 16: 0 - 60 mV DC (Input resistance 10 kΩ min.)
- 2: 0 - 100 mV DC (Input resistance 100 kΩ min.)
- 3: 0 - 1 V DC (Input resistance 1 MΩ min.)
- 4: 0 - 10 V DC (Input resistance 1 MΩ min.)
- 5: 0 - 5 V DC (Input resistance 1 MΩ min.)
- 6: 1 - 5 V DC (Input resistance 1 MΩ min.)
- 4W: -10 - +10 V DC (Input resistance 1 MΩ min.)
- 5W: -5 - +5 V DC (Input resistance 1 MΩ min.)
- 0: Specify voltage (See INPUT SPECIFICATIONS)  
(Select '/N' for 'Standards & Approvals' code.)
- 01: Specify voltage (See INPUT SPECIFICATIONS)  
(Select '/CE' for 'Standards & Approvals' code.)

### [2] SETPOINT 1 OUTPUT

- 1: Hi (coil energized at alarm)
- 3: Lo (coil energized at alarm)

### [3] SETPOINT 2 OUTPUT

- 1: Hi (coil energized at alarm)
- 3: Lo (coil energized at alarm)

### [4] OUTPUT

- 2: Relay; N.O. or make contact
- 6: Photo MOSFET relay; N.O.

### [5] POWER INPUT

#### AC Power

M: 85 - 264 V AC (Operational voltage range 85 - 264 V, 47 - 66 Hz)

(Select '/N' for 'Standards & Approvals' code.)

#### DC Power

R: 24 V DC

(Operational voltage range 24 V ±10 %, ripple 10 %p-p max.)

R2: 11 - 27 V DC

(Operational voltage range 11 - 27 V, ripple 10 %p-p max.)

(Select '/N' for 'Standards & Approvals' code.)

P: 110 V DC

(Operational voltage range 85 - 150 V, ripple 10 %p-p max.)

(Select '/N' for 'Standards & Approvals' code.)

### [6] OPTIONS (multiple selections)

#### Standards & Approvals (must be specified)

/N: Without CE

/CE: CE marking

#### Other Options

blank: none

/Q: Option other than the above (specify the specification)

## SPECIFICATIONS OF OPTION: Q (multiple selections)

**COATING (For the detail, refer to M-System's web site.)**

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

**TERMINAL SCREW MATERIAL**

/S01: Stainless steel

## GENERAL SPECIFICATIONS

**Construction:** Plug-in

**Connection:** M3 screw terminals (torque 0.8 N·m)

**Screw terminal:** Chromated steel (standard) or stainless steel

**Housing material:** Flame-resistant resin (black)

**Isolation:** Input to output 1 to output 2 to power

**Setpoint adjustments:** Multi-turn screwdriver adjustments (front); 0 - 100 % independently

**Monitor jacks:** Output 0 - 1 V for 0 - 100 % setpoints

**Hysteresis (deadband):**  $\leq 0.5$  %

**Front LEDs**

**Output 1:** Red LED turns on when the coil is energized.

**Output 2:** Green LED turns on when the coil is energized.

**Power ON timer:** Relays de-energized for approx. 1 seconds after power is turned on.

## INPUT SPECIFICATIONS

■ **DC Current:**

Shunt resistor attached to the input terminals (0.5 W)

Specify input resistance value for code Z.

■ **DC Voltage:** -300 - +300 V DC

(-30 - +30 V for the input code 01. Span 30 V max.)

**Minimum span:** 3 mV

**Offset:** Max. 1.5 times span

• **Input resistance**

Span 3 - 10 mV :  $\geq 10$  k $\Omega$

Span 10 - 100 mV :  $\geq 10$  k $\Omega$

Span 0.1 - 1 V :  $\geq 100$  k $\Omega$

Span  $\geq 1$  V :  $\geq 1$  M $\Omega$

## OUTPUT SPECIFICATIONS

■ **Relay Contact:**

120 V AC @0.5 A ( $\cos \phi = 1$ )

240 V AC @0.5 A ( $\cos \phi = 1$ )

30 V DC @0.5 A (resistive load)

**Maximum switching voltage:** 250 V AC or 120 V DC

**Maximum switching power:** 120 VA or 15 W ( $\leq 0.5$  A)

**Minimum load:** 5 V DC @10 mA

**Mechanical life:**  $5 \times 10^7$  cycles

For maximum relay life with inductive loads, external protection is recommended.

■ **Photo MOSFET Relay**


**Maximum switching voltage:** 30 V AC or 50 V DC

**Maximum switching current:** 0.5 A

**ON resistance:**  $\leq 2$  k $\Omega$

**Leakage current at OFF:**  $\leq 10$   $\mu$ A

For maximum relay life with inductive loads, external protection is recommended.

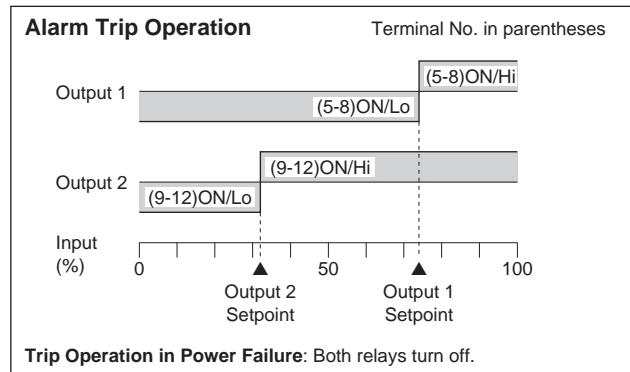

## INSTALLATION

**Power Consumption**

• **AC:**

Approx. 3 VA at 100 V

Approx. 4 VA at 200 V

Approx. 5 VA at 264 V

• **DC:** Approx. 3 W

**Operating temperature:** -5 to +55°C (23 to 131°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Mounting:** Surface or DIN rail

**Weight:** 150 g (0.33 lb)

## PERFORMANCE in percentage of span

**Setpoint monitor accuracy:**  $\pm 0.5$  %

**Temp. coefficient:**  $\pm 0.05$  %/°C ( $\pm 0.03$  %/°F)

**Response time:**  $\leq 0.5$  sec. (0 - 100 % at 90 % setpoint)

**Line voltage effect:**  $\pm 0.1$  % over voltage range

**Insulation resistance:**  $\geq 100$  M $\Omega$  with 500 V DC

**Dielectric strength:** 2000 V AC @1 minute (input to output 1 to output 2 to power to ground)

## STANDARDS & APPROVALS

**EU conformity:**

EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2

Low Voltage Directive

EN 61010-1

Measurement Category II (output)


Installation Category II (power)

Pollution Degree 2

Input to output to power: Basic insulation (300 V)


RoHS Directive

## FRONT VIEW

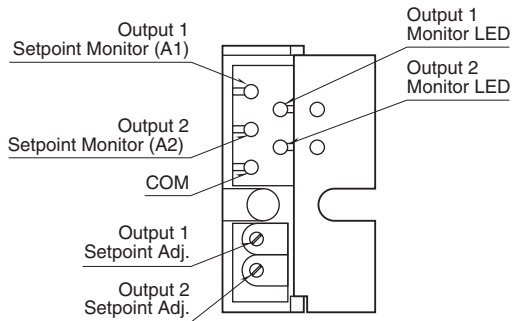


Refer to the instruction manual for detailed procedures.

## EXTERNAL DIMENSIONS unit: mm [inch]

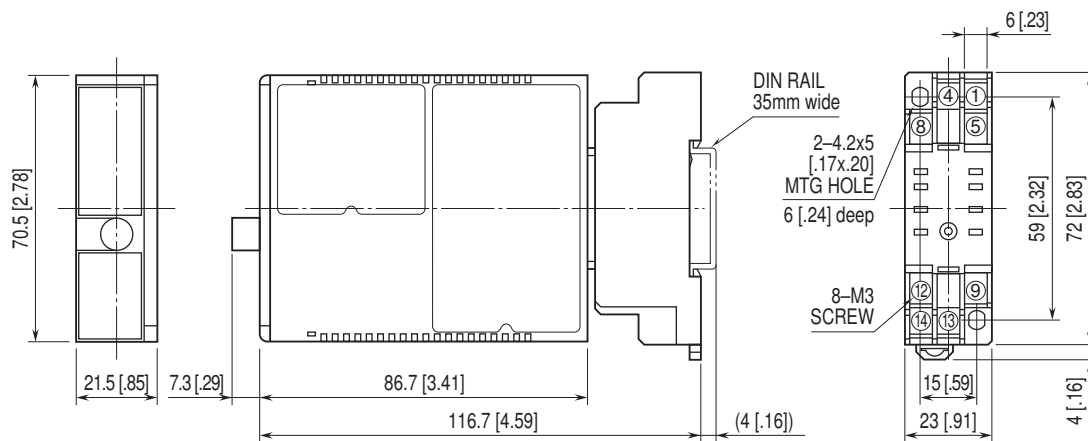


• When mounting, no extra space is needed between units.

## TERMINAL ASSIGNMENTS unit: mm [inch]

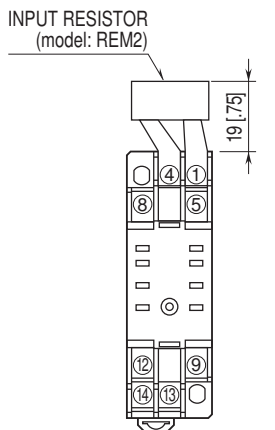

Input shunt resistor attached for current input.


## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

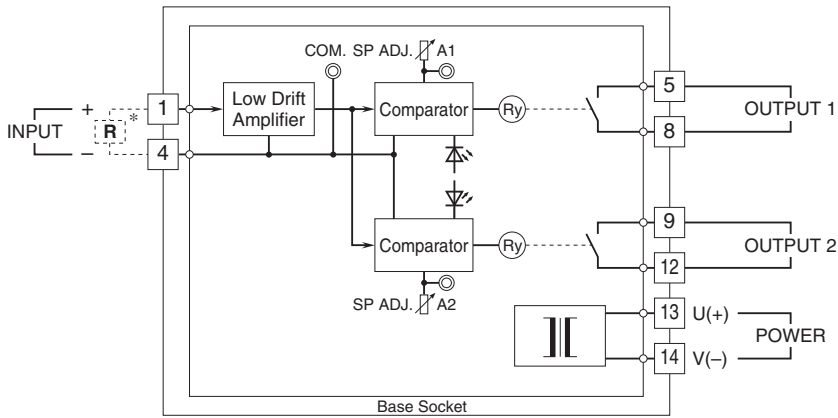


\*Input shunt resistor attached for current input.

### ■ Relay Protection

#### • AC Powered



#### • DC Powered

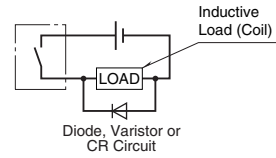

Specifications are subject to change without notice.