


**Limit Alarms (with DC output) AE-UNIT**

**DC ALARM**

**Functions & Features**

- Providing SPDT relay outputs at preset DC input levels
- Dual (Hi/Lo) trip
- Additional isolated DC output proportional to the input
- Energized or deenergized coil at a tripped condition selectable
- Thumbwheel switch adjustments
- Relays can be powered 110 V DC

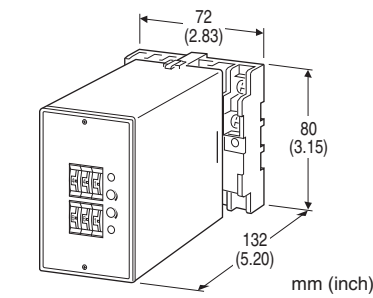

**MODEL: AEV-[1][2][3][4][5][6]-[7][8]**

**ORDERING INFORMATION**

- Code number: AEV-[1][2][3][4][5][6]-[7][8]
- Specify a code from below for each [1] through [8].  
(e.g. AEV-6A1111-D/Q)
- Special DC input and output ranges (For codes Z & 0)
- Specify the specification for option code /Q  
(e.g. /C01/S01)

**[1] INPUT**

**Current**

- A: 4 - 20 mA DC (Input resistance 250 Ω)
- A1: 4 - 20 mA DC (Input resistance 50 Ω)
- B: 2 - 10 mA DC (Input resistance 500 Ω)
- C: 1 - 5 mA DC (Input resistance 1000 Ω)
- D: 0 - 20 mA DC (Input resistance 50 Ω)
- E: 0 - 16 mA DC (Input resistance 62.5 Ω)
- F: 0 - 10 mA DC (Input resistance 100 Ω)
- G: 0 - 1 mA DC (Input resistance 1000 Ω)
- H: 10 - 50 mA DC (Input resistance 100 Ω)
- J: 0 - 10 μA DC (Input resistance 1000 Ω)
- K: 0 - 100 μA DC (Input resistance 1000 Ω)
- GW: -1 - +1 mA DC (Input resistance 1000 Ω)
- FW: -10 - +10 mA DC (Input resistance 100 Ω)
- Z: Specify current (See INPUT SPECIFICATIONS)

**Voltage**

- 1: 0 - 10 mV DC (Input resistance 10 kΩ min.)

- 15: 0 - 50 mV DC (Input resistance 10 kΩ min.)
- 16: 0 - 60 mV DC (Input resistance 10 kΩ min.)
- 2: 0 - 100 mV DC (Input resistance 100 kΩ min.)
- 3: 0 - 1 V DC (Input resistance 1 MΩ min.)
- 4: 0 - 10 V DC (Input resistance 1 MΩ min.)
- 5: 0 - 5 V DC (Input resistance 1 MΩ min.)
- 6: 1 - 5 V DC (Input resistance 1 MΩ min.)
- 4W: -10 - +10 V DC (Input resistance 1 MΩ min.)
- 5W: -5 - +5 V DC (Input resistance 1 MΩ min.)
- 0: Specify voltage (See INPUT SPECIFICATIONS)

**[2] DC OUTPUT**

N: None

**Current**

- A: 4 - 20 mA DC (Load resistance 350 Ω max.)
- B: 2 - 10 mA DC (Load resistance 700 Ω max.)
- C: 1 - 5 mA DC (Load resistance 1400 Ω max.)
- D: 0 - 20 mA DC (Load resistance 350 Ω max.)
- E: 0 - 16 mA DC (Load resistance 430 Ω max.)
- F: 0 - 10 mA DC (Load resistance 700 Ω max.)
- G: 0 - 1 mA DC (Load resistance 7000 Ω max.)
- Z: Specify current (See OUTPUT SPECIFICATIONS)

**Voltage**

- 1: 0 - 10 mV DC (Load resistance 10 kΩ min.)
- 2: 0 - 100 mV DC (Load resistance 100 kΩ min.)
- 3: 0 - 1 V DC (Load resistance 1000 Ω min.)
- 4: 0 - 10 V DC (Load resistance 10 kΩ min.)
- 5: 0 - 5 V DC (Load resistance 5000 Ω min.)
- 6: 1 - 5 V DC (Load resistance 5000 Ω min.)
- 4W: -10 - +10 V DC (Load resistance 10 kΩ min.)
- 5W: -5 - +5 V DC (Load resistance 5000 Ω min.)
- 0: Specify voltage (See OUTPUT SPECIFICATIONS)

**[3] SETPOINT 1 OUTPUT**

- 1: Hi (coil energized at alarm)
- 2: Hi (coil de-energized at alarm)
- 3: Lo (coil energized at alarm)
- 4: Lo (coil de-energized at alarm)

**[4] SETPOINT 2 OUTPUT**

- 1: Hi (coil energized at alarm)
- 2: Hi (coil de-energized at alarm)
- 3: Lo (coil energized at alarm)
- 4: Lo (coil de-energized at alarm)

**[5] ON DELAY TIME**

- 0: 0.5 seconds
- 1: 1 second
- 2: 2 seconds
- 3: 3 seconds
- 4: 4 seconds

**[6] POWER ON DELAY TIME**

- 1: 1 second
- 2: 2 seconds
- 3: 3 seconds
- 4: 4 seconds
- 5: 5 seconds

**[7] POWER INPUT****AC Power**

- B: 100 V AC
- C: 110 V AC
- D: 115 V AC
- F: 120 V AC
- G: 200 V AC
- H: 220 V AC
- J: 240 V AC

**DC Power**

- S: 12 V DC
- R: 24 V DC
- V: 48 V DC
- P: 110 V DC

**[8] OPTIONS**

blank: none

/Q: With options (specify the specification)

**SPECIFICATIONS OF OPTION: Q (multiple selections)****COATING (For the detail, refer to M-System's web site.)**

- /C01: Silicone coating
- /C02: Polyurethane coating
- /C03: Rubber coating

**TERMINAL SCREW MATERIAL**

- /S01: Stainless steel

**GENERAL SPECIFICATIONS**

**Construction:** Plug-in

**Connection:** M3.5 screw terminals

**Screw terminal:** Chromated steel (standard) or stainless steel

**Housing material:** Flame-resistant resin (black)

**Isolation:** Input to DC output to alarm output 1 to alarm output 2 to power

**Overrange output:** Approx. -10 to +120 % at 1 - 5 V

**Zero adjustment:** -5 to +5 % (front)

**Span adjustment:** 95 to 105 % (front)

**Setpoint adjustments:** Thumbwheel switches (front); 0 - 99 % independently; 1 % increments

**Hysteresis (deadband) adjustments:** Thumbwheel switches (front); 0.5, 1 - 9 % independently; 1 % increments (SW position 0 = 0.5); [Lo SP + Hysteresis]  $\leq$  102

**Front LEDs:** Red lights turn on when the coils are energized.

**INPUT SPECIFICATIONS****■ DC Current:**

Shunt resistor attached to the input terminals (0.5 W)  
Specify input resistance value for code Z.

**■ DC Voltage:** -300 - +300 V DC

**Minimum span:** 10 mV

**Offset:** Max. 1.5 times span

**Input resistance**

Span 10 - 100 mV :  $\geq$  10 k $\Omega$

Span 0.1 - 1 V :  $\geq$  100 k $\Omega$

Span  $\geq$  1 V :  $\geq$  1 M $\Omega$

## OUTPUT SPECIFICATIONS

### ■ DC Output

•DC Current: 0 - 20 mA DC

Minimum span: 1 mA

Offset: Max. 1.5 times span

Load resistance: Output drive 7 V maximum

•DC Voltage: -10 - +12 V DC

Minimum span: 5 mV

Offset: Max. 1.5 times span

Load resistance: Output drive 1 mA maximum; at  $\geq 0.5$  V

### ■ Alarm Output: Relay contact

100 V AC @ 1 A ( $\cos \theta = 1$ )

120 V AC @ 1 A ( $\cos \theta = 1$ )

240 V AC @ 0.5 A ( $\cos \theta = 1$ )

30 V DC @ 1 A (resistive load)

Maximum switching voltage: 380 V AC or 125 V DC

Maximum switching power: 120 VA or 30 W

Minimum load: 5 V DC @ 10 mA

Mechanical life:  $5 \times 10^7$  cycles

For maximum relay life with inductive loads, external protection is recommended.

## PERFORMANCE in percentage of span

### •DC output

Accuracy:  $\pm 0.1$  %

Response time:  $\leq 0.5$  sec. (0 - 90 %)

### •Alarm output

Setpoint accuracy:  $\pm 0.5$  %

Hysteresis (Deadband) setpoint accuracy:  $\pm 0.3$  %

ON delay time accuracy: rating  $\pm 20$  % or 0.3 sec., whichever is greater.

Power ON delay time accuracy: rating  $\pm 30$  %

Trip point repeatability:  $\pm 0.05$  %

Temp. coefficient:  $\pm 0.015$  %/°C ( $\pm 0.008$  %/°F)


Line voltage effect:  $\pm 0.1$  % over voltage range

Insulation resistance:  $\geq 100$  M $\Omega$  with 500 V DC

Dielectric strength: 2000 V AC @ 1 minute

(input to DC output to alarm output 1 to alarm output 2 to power to ground)

### Alarm Trip Operation Terminal No. in parentheses

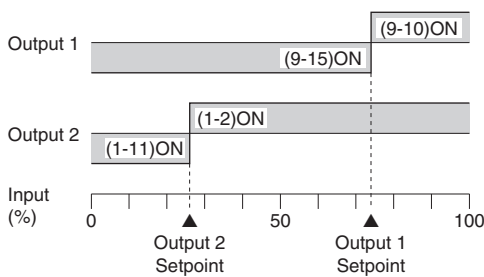

### Trip Operation in Power Failure

•Output Code: 1 & 4: Terminals 1 - 11, 9 - 15 turn ON

•Output Code: 2 & 3: Terminals 1 - 2, 9 - 10 turn ON

## INSTALLATION

### Power input

•AC: Operational voltage range: rating  $\pm 10$  %, 50/60  $\pm 2$  Hz, approx. 3 VA

•DC: Operational voltage range: rating  $\pm 10$  %, or 85 - 150 V for 110 V rating (ripple 10 % p-p max.) approx. 2 W (80 mA at 24 V)


Operating temperature: -5 to +55°C (23 to 131°F)

Operating humidity: 30 to 90 %RH (non-condensing)


Mounting: Surface or DIN rail

Weight: 450 g (0.99 lb)

## EXTERNAL VIEW

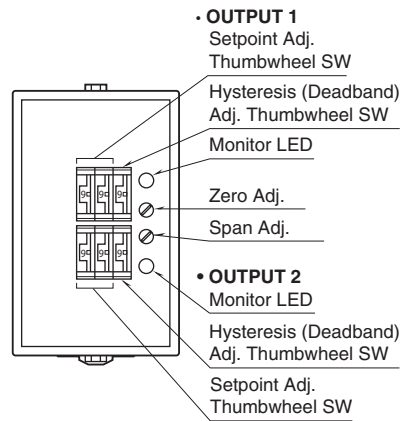


## EXTERNAL DIMENSIONS unit: mm (inch)

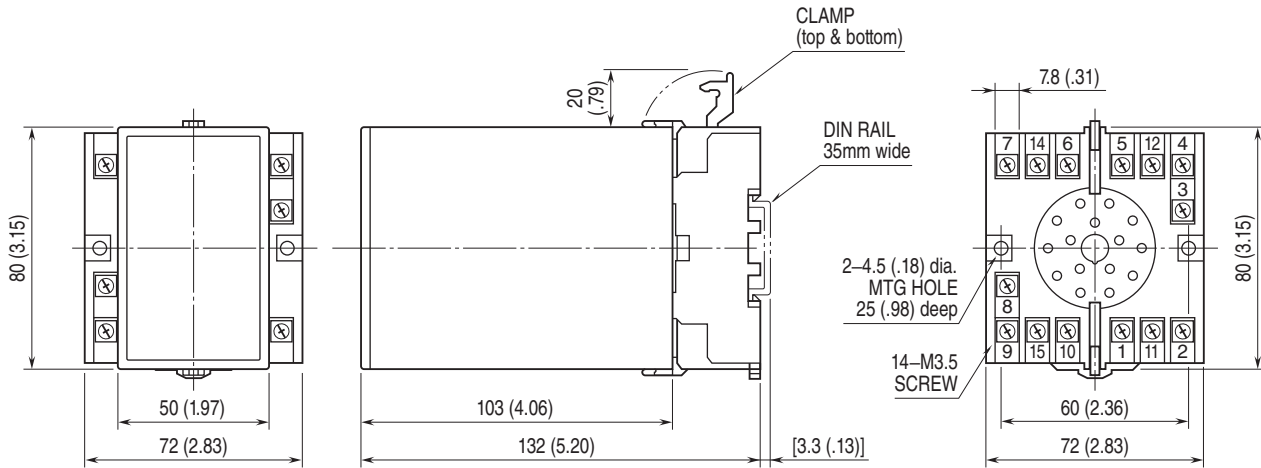


• When mounting, no extra space is needed between units.

## TERMINAL ASSIGNMENTS unit: mm (inch)

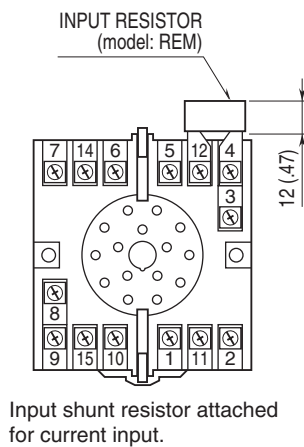


## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

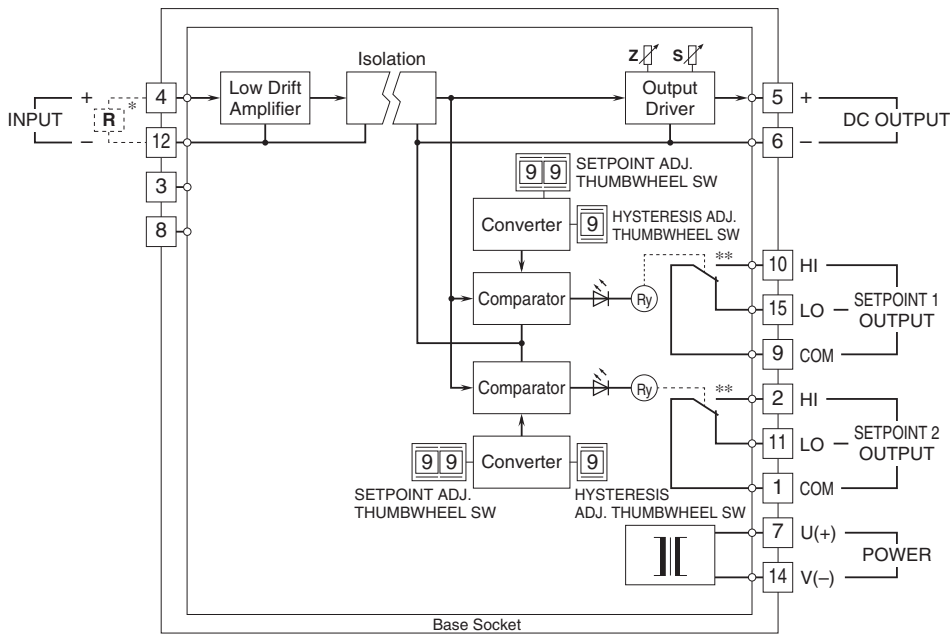


\* Input shunt resistor attached for current input.  
 \*\*Relay status for output codes "1" & "4", at power OFF.

### ■ Relay Protection •AC Powered



### •DC Powered



Specifications are subject to change without notice.