


**Super-mini Two-wire Terminal Block
Signal Conditioners B5-UNIT**

SIGNAL TRANSMITTER

Functions & Features

- Converts a DC input into an isolated 4 - 20 mA DC signal
- Monitor terminals
- High-density mounting
- Power LED

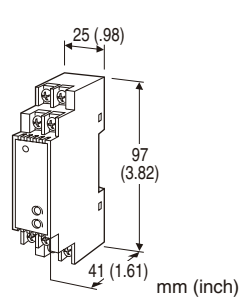

MODEL: B5VS-[1][2]

ORDERING INFORMATION

- Code number: B5VS-[1][2]
- Specify a code from below for each of [1] and [2].
(e.g. B5VS-4W/K/Q)
- Special input range (For codes Z & 0)
 - Specify the specification for option code /Q
(e.g. /C01)

[1] INPUT

Current

- A:** 4 - 20 mA DC (Input resistance 249 Ω)
- B:** 2 - 10 mA DC (Input resistance 499 Ω)
- C:** 1 - 5 mA DC (Input resistance 1000 Ω)
- D:** 0 - 20 mA DC (Input resistance 49.9 Ω)
- E:** 0 - 16 mA DC (Input resistance 61.9 Ω)
- F:** 0 - 10 mA DC (Input resistance 100 Ω)
- G:** 0 - 1 mA DC (Input resistance 1000 Ω)
- H:** 10 - 50 mA DC (Input resistance 10 Ω)
- Z:** Specify current (See INPUT SPECIFICATIONS)

Voltage

- 3:** 0 - 1 V DC (Input resistance 1 MΩ min.)
- 4:** 0 - 10 V DC (Input resistance 1 MΩ min.)
- 5:** 0 - 5 V DC (Input resistance 1 MΩ min.)
- 6:** 1 - 5 V DC (Input resistance 1 MΩ min.)
- 4W:** -10 - +10 V DC (Input resistance 1 MΩ min.)
- 5W:** -5 - +5 V DC (Input resistance 1 MΩ min.)
- 0:** Specify voltage (See INPUT SPECIFICATIONS)

[2] OPTIONS (multiple selections)

Response Time (0 - 90 %)

- blank:** Standard (≤ 0.5 sec.)
- /K:** Fast Response (Approx. 25 msec.)

Other Options

- blank:** none
- /Q:** Option other than the above (specify the specification)

SPECIFICATIONS OF OPTION: Q

COATING (For the detail, refer to M-System's web site.)

- /C01:** Silicone coating
- /C02:** Polyurethane coating
- /C03:** Rubber coating

GENERAL SPECIFICATIONS


- Construction:** Terminal block
- Connection:** M3.5 screw terminals (torque 0.8 N·m)
- Screw terminal:** Nickel-plated steel
- Housing material:** Flame-resistant resin (black)
- Isolation:** Input to output
- Zero adjustment:** -1 to +1 % (front)
- Span adjustment:** 95 to 105 % (front)
- Power LED:** Orange LED turns on when the power is supplied.

INPUT SPECIFICATIONS

- **DC Current:** Input resistor incorporated
Specify input resistance value for code Z.
($R \leq 0.125 \text{ W} \div [\text{F.S. Current}]^2$)
- **DC Voltage:** -30 - +30 V DC
- Minimum span:** 100 mV
- Offset:** Max. 1.5 times span
- **Input resistance**
Span 0.1 - 1 V : ≥ 100 kΩ
Span ≥ 1 V : ≥ 1 MΩ

OUTPUT SPECIFICATIONS

- Output:** 4 - 20 mA DC
- Load resistance vs. supply voltage:**
Load Resistance (Ω) = (Supply Voltage (V) - 12 (V)) ÷ 0.02
(A) (including leadwire resistance)

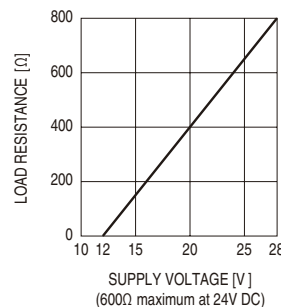

INSTALLATION

Supply voltage: 12 - 28 V DC

Operating temperature: -40 to +80°C (-40 to +176°F)

Operating humidity: 0 to 90 %RH (non-condensing)

Mounting: DIN rail

Weight: 60 g (2.1 oz)

PERFORMANCE in percentage of span

Accuracy: $\pm 0.1\%$

Temp. coefficient: $\pm 0.015\%/^{\circ}\text{C}$ ($\pm 0.008\%/^{\circ}\text{F}$)

Insulation resistance: $\geq 100\text{ M}\Omega$ with 500 V DC

Dielectric strength: 2000 V AC @1 minute

(input to output to ground)

STANDARDS & APPROVALS

EU conformity:


EMC Directive

EMI EN 61000-6-4


EMS EN 61000-6-2

RoHS Directive

EXTERNAL VIEW

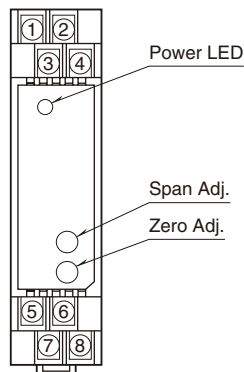


EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

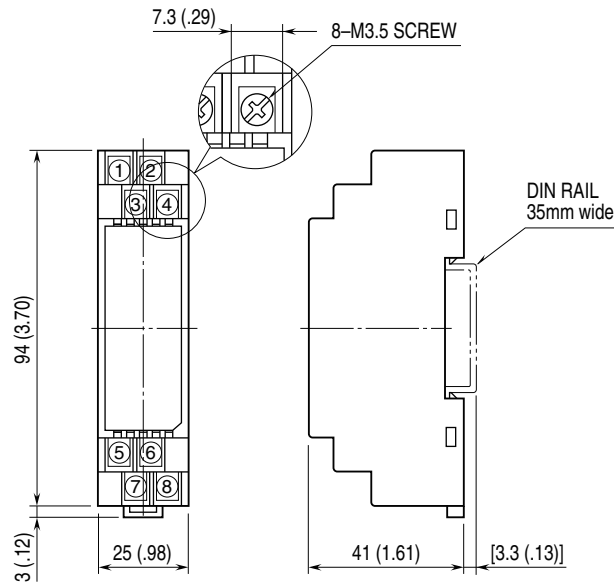

• When mounting, no extra space is needed between units.

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

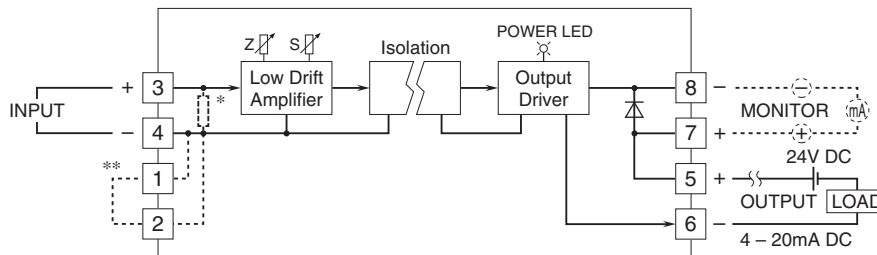

* Input shunt resistor incorporated for current input.
 **Short across the terminals for current input.



Specifications are subject to change without notice.