

PC CONFIGURATOR CABLE

(USB - miniature jack, isolated)

Functions & Features

- Used to connect M-System Remote I/O or Signal Conditioners etc. to the PC's USB port when setting parameters or monitoring operations of these devices on the PC Configurator Software

MODEL: COP-US

ORDERING INFORMATION

- Code number: COP-US

PACKAGE INCLUDES...

- Driver software CD-ROM (1)

GENERAL SPECIFICATIONS

Connection

USB: Type A connector

Miniature Jack: 3-pin, 2.5 mm dia.

Housing material: Resin (black)

Isolation: USB to miniature jack

COMMUNICATION

Communication protocol: Full Speed USB2.0

(also usable with USB1.1 port)

Transmission speed: 38400 bps max.

CONNECTED DEVICE

USB: PC/AT compatible

OS (Windows 10 (32-bit, 64-bit), Windows 8.1 (32-bit, 64-bit), Windows 7 (32-bit, 64-bit), Windows Vista (32-bit))

Miniature jack side: M-System Remote I/O, Signal Conditioners etc.

INSTALLATION

Operating temperature: -5 to +60°C (23 to 140°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Weight: 75 g (2.6 oz)


PERFORMANCE

Insulation resistance: $\geq 100 \text{ M}\Omega$ with 500 V DC

Dielectric strength: 500 V AC @1 minute

(USB to miniature jack)

DIMENSIONS unit: mm (inch)

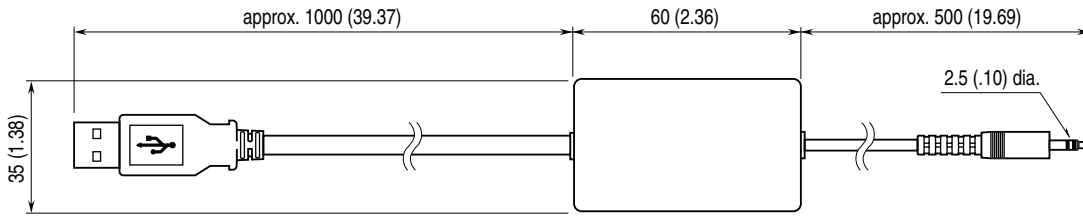

Specifications are subject to change without notice.