

ORDERING INFORMATION

MODEL : 47NLNT

PLEASE FILL IN THIS SECTION



Model
Company
Name
P/O No.

M-SYSTEM USE ONLY



Job No.	Approved by (Sales office)
Ser No.	Issued by (Sales office)
Sales	Approved by (Factory)
	Set by (Factory)
	Ser No.

Specify the items you want to change. Default setting will be used if not specified.


DEFAULT shows values in case of nothing specified.

■ SCALING SETTING


ITEM	AVAILABLE RANGE	SET VALUE	DEFAULT VALUE	Factory Internal check
Input Scaling ZERO Display Scaling ZERO Input Scaling SPAN Display Scaling SPAN	4 – 20mA DC	Input Scaling ZERO	4.00	<input type="checkbox"/> Checked
		Display Scaling ZERO (-19999 – 19999)		
		Input Scaling SPAN	20.00	
		Display Scaling SPAN (-19999 – 19999)		

* About scaling Input Scaling and Display Scaling.

- Normal Scaling
The display value increases when the input signal increases.

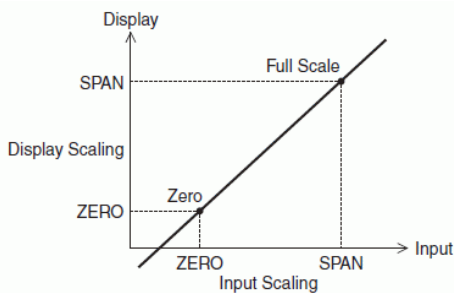

- Inverted Scaling
The display value decreases when the input signal increases.

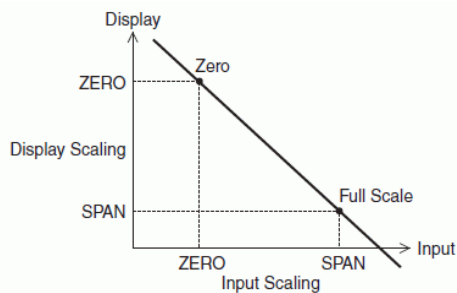

Set the decimal point according to the necessary accuracy.

■ BRIGHTNESS SETTING

ITEM	SET VALUE	DEFAULT VALUE	Factory Internal check
Brightness	<input type="checkbox"/> C1: Brightness level 1 (dark) <input type="checkbox"/> C2: Brightness level 2 <input type="checkbox"/> C3: Brightness level 3 (bright)	C3: Brightness level 3 (bright)	<input type="checkbox"/> Checked

■ ENGINEERING UNIT INDICATION

ITEM	AVAILABLE RANGE	SET VALUE	DEFAULT VALUE	Factory Internal check
Unit Sticker Label	DC, AC, mV, V, kV, μ A, mA, A, kA, mW, W, kW, var, kvar, Mvar, VA, Hz, Ω , k Ω , M Ω , cm, mm, m, m/sec, mm/min, cm/min, m/min, m/h, m/s ² , inch, ℓ , ℓ /s, ℓ /min, ℓ /h, m ³ , m ³ /sec, m ³ /min, m ³ /h, Nm ³ /h, N·m, N/m ² , g, kg, kg/h, N, kN, Pa, kPa, MPa, t, t/h, °C, °F, %RH, J, Kj, MJ, rpm, sec, min, pH, %, ppm	Select one if necessary.	none	<input type="checkbox"/> Checked

*Location of the sticker label

