

ORDERING INFORMATION

MODEL : 47NLR

PLEASE FILL IN THIS SECTION



Model
Company
Name
P/O No.

M-SYSTEM USE ONLY



Job No.	Approved by (Sales office)
Ser No.	Issued by (Sales office)
Sales	Approved by (Factory)
	Set by (Factory)
	Ser No.

Specify the items you want to change. Default setting will be used if not specified.

DEFAULT shows values in case of nothing specified.

■ INITIAL SETTING

ITEM	AVAILABLE RANGE		SET VALUE	DEFAULT VALUE	Factory Internal check
Temperature Unit	Temperature Unit C: °C F: °F	Specify the value among shown left.	<input type="checkbox"/> : C <input type="checkbox"/> : F	C : °C	<input type="checkbox"/> Checked
Decimal Point Position	Decimal Point Position doFF : No display after the decimal point d on : One decimal place	Specify the value among shown left.	<input type="checkbox"/> : doFF <input type="checkbox"/> : d on	d on : One decimal place	<input type="checkbox"/> Checked

Note 1: 'don' setting is not available for temperature unit of °F.

■ ALARM POINT SETTING

ITEM	SET VALUE	DEFAULT VALUE	Factory Internal check
Alarm Points	<input type="checkbox"/> Dual alarm <input type="checkbox"/> No-alarm	<input type="checkbox"/> Dual alarm	<input type="checkbox"/> Checked

■ **ALARM SETPOINT SETTING** (When alarm setpoint is set to 2 points)

ITEM	AVAILABLE RANGE		SET VALUE	DEFAULT VALUE	Factory Internal check
L Alarm Setpoint	-9999 – 9999 (When L setpoint is none, specify “-“.)	Specify the value within the range. * Decimal point position: No display after the decimal point: Unit 1°C or 1°F One decimal place: Unit 0.1°C		30.0 ^{*1}	<input type="checkbox"/> Checked
H Alarm Setpoint	-9999 – 9999 (When H setpoint is none, specify “-“.)	Specify the value within the range. * Decimal point position: No display after the decimal point: Unit 1°C or 1°F One decimal place: Unit 0.1°C		70.0 ^{*1}	<input type="checkbox"/> Checked

*1. If Decimal Point Position is changed, Alarm Setpoint is automatically set to “-” (none).


■ **BRIGHTNESS SETTING**

ITEM	SET VALUE	DEFAULT VALUE	Factory Internal check
Brightness	<input type="checkbox"/> C1: Brightness level 1 (dark) <input type="checkbox"/> C2: Brightness level 2 <input type="checkbox"/> C3: Brightness level 3 (medium) <input type="checkbox"/> C4: Brightness level 4 <input type="checkbox"/> C5: Brightness level 5 (bright)	C3: Brightness level 3 (medium)	<input type="checkbox"/> Checked

■ **ENGINEERING UNIT INDICATION**

ITEM	AVAILABLE RANGE		SET VALUE	DEFAULT VALUE	Factory Internal check
Unit Sticker Label	DC, AC, mV, V, kV, μA, mA, A, kA, mW, W, kW, var, kvar, Mvar, VA, Hz, Ω, kΩ, MΩ, cm, mm, m, m/sec, mm/min, cm/min, m/min, m/h, m/s ² , inch, l, l/s, l/min, l/h, m ³ , m ³ /sec, m ³ /min, m ³ /h, Nm ³ /h, N·m, N/m ² , g, kg, kg/h, N, kN, Pa, kPa, MPa, t, t/h, °C, °F, %RH, J, Kj, MJ, rpm, sec, min, pH, %, ppm	Select one if necessary.		none	<input type="checkbox"/> Checked

• Location of the sticker label

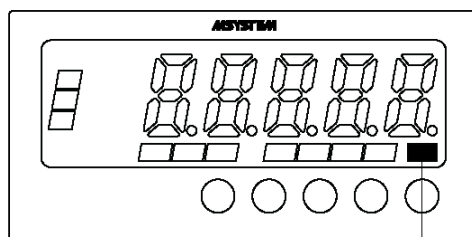

Sticker Label