

# ORDERING INFORMATION

MODEL : 47NLDY

**PLEASE FILL IN THIS SECTION**



Model
Company
Name
P/O No.

**M-SYSTEM USE ONLY**



Job No.	Approved by (Sales office)
Ser No.	Issued by (Sales office)
Sales	Approved by (Factory)
	Set by (Factory)
	Ser No.

**Specify the items you want to change. Default setting will be used if not specified.**

DEFAULT shows values in case of nothing specified.

■ **LINEARIZER**

ITEM	SET VALUE	DEFAULT VALUE	Factory Internal check
Linearizer	<input type="checkbox"/> Linear <input type="checkbox"/> Square root extraction	Linear	<input type="checkbox"/> Checked


■ **SCALING SETTING**

ITEM	AVAILABLE RANGE	SET VALUE	DEFAULT VALUE	Factory Internal check
Display Scaling ZERO	-19999 – 19999		4.00	<input type="checkbox"/> Checked
Display Scaling SPAN	-19999 – 19999		20.00	

\* About scaling Input Scaling and Display Scaling.


• **Normal Scaling**

The display value increases when the input signal increases.

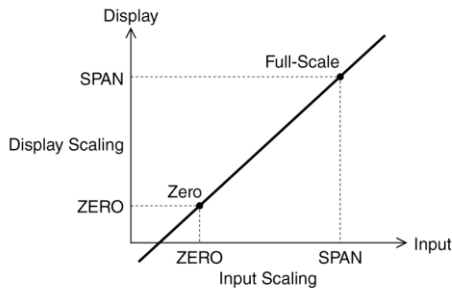

• **Inverted Scaling**

The display value decreases when the input signal increases.

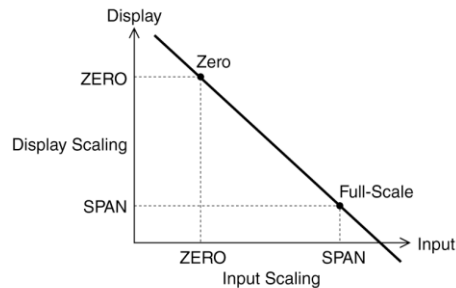

Set the decimal point according to the necessary accuracy.

■ ALARM POINT SETTING

ITEM	SET VALUE	DEFAULT VALUE	Factory Internal check
Alarm Points	<input type="checkbox"/> Dual alarm <input type="checkbox"/> No alarm	<input type="checkbox"/> Dual alarm	<input type="checkbox"/> Checked

■ ALARM SETPOINT SETTING (When alarm setpoint is set to 2 points)

ITEM	AVAILABLE RANGE	SET VALUE	DEFAULT VALUE	Factory Internal check
L Alarm Setpoint	-19999 – 19999 (When L setpoint is none, specify “-“.)	Specify the value within the range.	5.60	<input type="checkbox"/> Checked
H Alarm Setpoint	-19999 – 19999 (When H setpoint is none, specify “-“.)	Specify the value within the range.	18.40	

Note: When scaling setting is specified and alarm setting is not specified, L is set to display scaling value ZERO, H is set to display scaling valued SPAN.


■ BRIGHTNESS SETTING

ITEM	SET VALUE	DEFAULT VALUE	Factory Internal check
Brightness	<input type="checkbox"/> C1: Brightness level 1 (dark) <input type="checkbox"/> C2: Brightness level 2 <input type="checkbox"/> C3: Brightness level 3 (medium) <input type="checkbox"/> C4: Brightness level 4 <input type="checkbox"/> C5: Brightness level 5 (bright)	C3: Brightness level 3 (medium)	<input type="checkbox"/> Checked

■ ENGINEERING UNIT INDICATION

ITEM	AVAILABLE RANGE	SET VALUE	DEFAULT VALUE	Factory Internal check
Unit Sticker Label	DC, AC, mV, V, kV, $\mu$ A, mA, A, kA, mW, W, kW, var, kvar, Mvar, VA, Hz, $\Omega$ , k $\Omega$ , M $\Omega$ , cm, mm, m, m/sec, mm/min, cm/min, m/min, m/h, m/s <sup>2</sup> , inch, l, l/s, l/min, l/h, m <sup>3</sup> , m <sup>3</sup> /sec, m <sup>3</sup> /min, m <sup>3</sup> /h, Nm <sup>3</sup> /h, N·m, N/m <sup>2</sup> , g, kg, kg/h, N, kN, Pa, kPa, MPa, t, t/h, °C, °F, %RH, J, Kj, MJ, rpm, sec, min, pH, %, ppm	Select one if necessary.	none	<input type="checkbox"/> Checked

\*Location of the sticker label

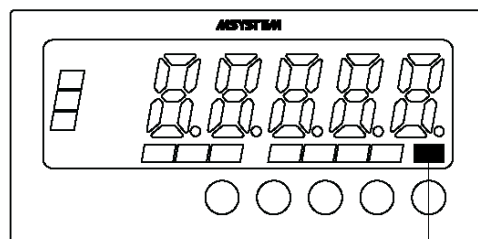

Sticker Label