

ORDERING INFORMATION

MODEL : 47NLDYT

PLEASE FILL IN THIS SECTION



Model
Company
Name
P/O No.

M-SYSTEM USE ONLY



Job No.	Approved by (Sales office)
Ser No.	Issued by (Sales office)
Sales	Approved by (Factory)
	Set by (Factory)
	Ser No.

Specify the items you want to change. Default setting will be used if not specified.

DEFAULT shows values in case of nothing specified.

■ **LINEARIZER**

ITEM	SET VALUE	DEFAULT VALUE	Factory Internal check
Linearizer	<input type="checkbox"/> Linear <input type="checkbox"/> Square root extraction	Linear	<input type="checkbox"/> Checked


■ **SCALING SETTING**

ITEM	AVAILABLE RANGE	SET VALUE	DEFAULT VALUE	Factory Internal check
Display Scaling ZERO	-19999 – 19999		4.00	<input type="checkbox"/> Checked
Display Scaling SPAN	-19999 – 19999		20.00	

* About scaling Input Scaling and Display Scaling.


• **Normal Scaling**

The display value increases when the input signal increases.

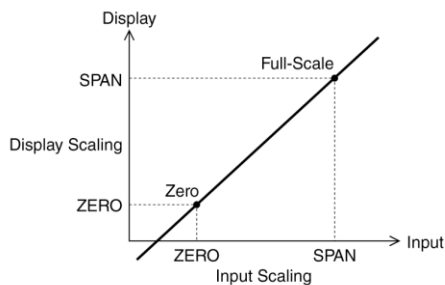

• **Inverted Scaling**

The display value decreases when the input signal increases.

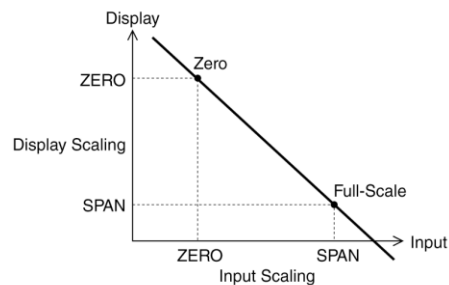

Set the decimal point according to the necessary accuracy.

■ **ALARM POINT SETTING**

ITEM	SET VALUE	DEFAULT VALUE	Factory Internal check
Alarm Points	<input type="checkbox"/> Dual alarm <input type="checkbox"/> No alarm	<input type="checkbox"/> Dual alarm	<input type="checkbox"/> Checked

■ **ALARM SETPOINT SETTING** (When alarm setpoint is set to 2 points)

ITEM	AVAILABLE RANGE		SET VALUE	DEFAULT VALUE	Factory Internal check
L Alarm Setpoint	-19999 – 19999 (When L setpoint is none, specify “-“.)	Specify the value within the range.		5.60	<input type="checkbox"/> Checked
H Alarm Setpoint	-19999 – 19999 (When H setpoint is none, specify “-“.)	Specify the value within the range.		18.40	

Note: When scaling setting is specified and alarm setting is not specified, L is set to display scaling value ZERO, H is set to display scaling valued SPAN.

■ **BRIGHTNESS SETTING**

ITEM	SET VALUE	DEFAULT VALUE	Factory Internal check
Brightness	<input type="checkbox"/> C1: Brightness level 1 (dark) <input type="checkbox"/> C2: Brightness level 2 <input type="checkbox"/> C3: Brightness level 3 (medium) <input type="checkbox"/> C4: Brightness level 4 <input type="checkbox"/> C5: Brightness level 5 (bright)	C3: Brightness level 3 (medium)	<input type="checkbox"/> Checked

■ **ENGINEERING UNIT INDICATION**

ITEM	AVAILABLE RANGE		SET VALUE	DEFAULT VALUE	Factory Internal check
Unit Sticker Label	DC, AC, mV, V, kV, μ A, mA, A, kA, mW, W, kW, var, kvar, Mvar, VA, Hz, Ω , k Ω , M Ω , cm, mm, m, m/sec, mm/min, cm/min, m/min, m/h, m/s ² , inch, l, l/s, l/min, l/h, m ³ , m ³ /sec, m ³ /min, m ³ /h, Nm ³ /h, N·m, N/m ² , g, kg, kg/h, N, kN, Pa, kPa, MPa, t, t/h, °C, °F, %RH, J, Kj, MJ, rpm, sec, min, pH, %, ppm	Select one if necessary.		none	<input type="checkbox"/> Checked

*Location of the sticker label

