

---

**Lightning Surge Protectors for  
Electronics Equipment M-RESTER**

**WIRING BRIDGE**

**Functions & Features**

- Easy cross-wiring of multiple MAL/MALN to the common ground

**MODEL: CNB2-[1]**

**ORDERING INFORMATION**

- Code number: CNB2-[1]

Specify a code from below for [1].

(e.g. CNB2-4)

**[1] NUMBER OF POLES**

2: Two poles

4: Four poles (for 2 units)

5: Five poles (for 3 units)

7: Seven poles (for 4 units)

**GENERAL SPECIFICATIONS**

**Material**

**Conductor:** Copper

**Insulation:** Resin (white)

**INSTALLATION**

**Weight:**

**CNB2-2:** 15 g (0.53 oz)


**CNB2-4:** 17 g (0.60 oz)

**CNB2-5:** 19 g (0.67 oz)


**CNB2-7:** 22 g (0.78 oz)

## EXTERNAL DIMENSIONS unit: mm (inch)


■CNB2-2

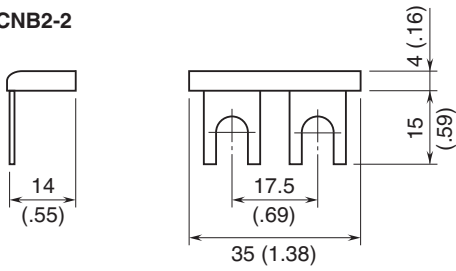


■CNB2 ATTACHED TO M-RESTER

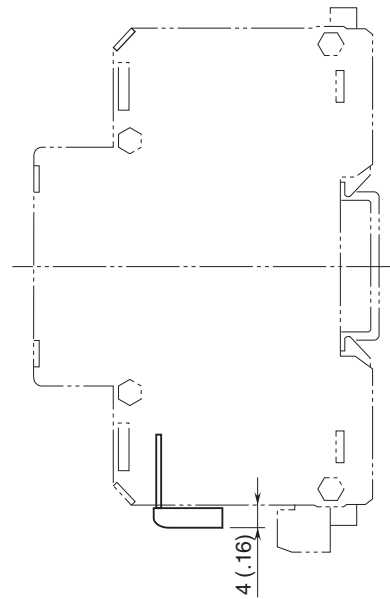


■CNB2-4

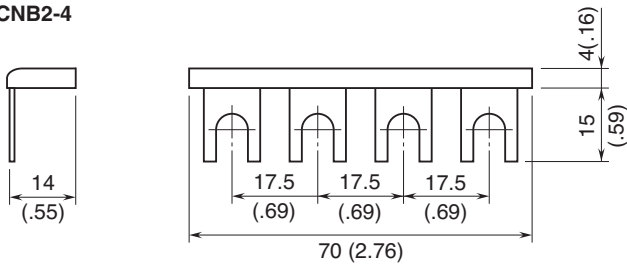

■CNB2-5

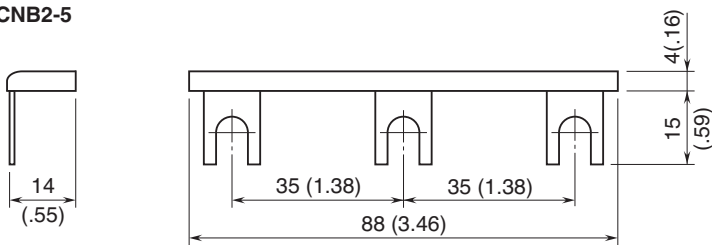

■CNB2-7

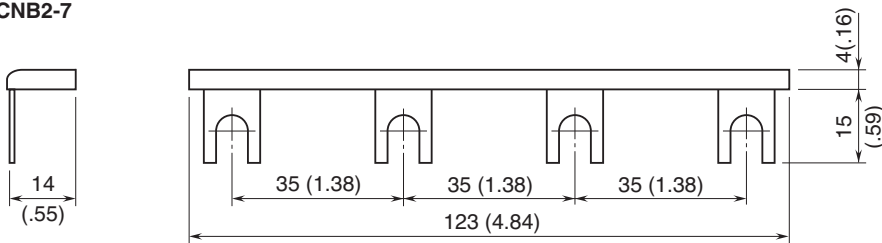

Specifications are subject to change without notice.